

County of Santa Cruz

DEPARTMENT OF COMMUNITY DEVELOPMENT AND INFRASTRUCTURE

701 OCEAN STREET, FOURTH FLOOR, SANTA CRUZ, CA 95060-4070 Planning (831) 454-2580 Public Works (831) 454-2160

October 6, 2023

Zoning Administrator County of Santa Cruz 701 Ocean Street, 4th Floor Santa Cruz, CA 95060

Subject: Application #: 211129; Assessor's Parcel #: 042-081-06 Owner: Kennedy

Dear Zoning Administrator:

On September 1, 2023, application 211129, a Coastal Development Permit to remodel an existing single story single-family dwelling and construct an approximately 960 square foot first and second story addition was heard by the Zoning Administrator and continued to the October 6, 2023 agenda.

The primary reason for the continuance was to allow the applicant an opportunity to provide additional visual simulations in response to concerns regarding potential visual impacts of the project as seen from Seacliff State Beach. This project was continued to a date certain and no additional public notice of the October 6, 2023 hearing is required however, the Zoning Administrator directed staff to repost the Notice of Public Hearing at the project site and ensure the notice is visible to pedestrians to the extent feasible.

The Notice of Public Hearing was reposted at the project site on 9/24/23. Included in the packet as Exhibit 1D, are enhanced visual simulations depicting the proposed development as seen from the primary vantage points along Seacliff State Beach. As indicated in the original Staff Report to the Zoning Administrator, the project site is currently visible from the public beach and will continue to be visible as a result of the project. The proposed design minimizes potential visual impacts to the surrounding area in that the second floor addition will be setback approximately 40 feet from the edge of the coastal bluff.

In consideration of the additional visual simulations, the project remains consistent with all applicable codes and policies pertaining to protection of visual resources. Though the project includes a new second story addition, the proposed project has been designed in conformance with the Coastal Design Criteria and Design Review Ordinance.

As indicated at the September 1, 2023 hearing, several changes to the Conditions of Approval were proposed. Changes to the conditions contained in the staff report to the Zoning Administrator (Exhibit C of Exhibit 1E) have been incorporated into the attached clean copy of the Recommended Conditions of Approval (Exhibit 1C).

CEQA Determination

As proposed and conditioned, the project qualifies as a Class one and Class three Exemption pursuant to the California Environmental Quality Act. The project proposes to construct an approximately 960 square foot first and second story addition to an existing single family dwelling. Though the project site is located within an area mapped as a scenic resource in the County General Plan, the use of these exemptions is appropriate. The surrounding area contains one and two story single family construction and the proposed project is consistent with the range of architectural styles found in the vicinity. As indicated in the attached Findings (Exhibit 1B), the project has been designed consistent with the Desing Review ordinance and Coastal Desing criteria.

Conclusion

As proposed and conditioned, the project is consistent with all applicable codes and policies of the Zoning Ordinance and General Plan/LCP. Therefore, staff recommends a Determine that the proposal is exempt from further Environmental Review under the California Environmental Quality Act and APPROVAL of Application Number 211129, based on the attached findings and conditions.

Should you have further questions concerning this application, please contact me at: (831) 454-3118 or e-mail: <u>nathan.macbeth@santacruzcountyca.gov</u>

Sincerely,

Nathan Mac Both.

Nathan MacBeth Project Planner Development Review

Exhibits:

- 1A. CEQA Determination1B. Findings for Approval
- 1C. Revised Conditions of Approval
- 1D. Visual Simulations
- 1E. Staff Report to the Zoning Administrator 9/1/23
- 1F. Comments and Correspondence

CALIFORNIA ENVIRONMENTAL QUALITY ACT NOTICE OF EXEMPTION

The Santa Cruz County Planning Division has reviewed the project described below and has determined that it is exempt from the provisions of CEQA as specified in Sections 15061 - 15332 of CEQA for the reason(s) which have been specified in this document.

Application Number: 211129 Assessor Parcel Number: 042-081-06 Project Location: 181 Seacliff Drive, Aptos

Project Description: Construction of a first and second story addition and remodel of an existing single family residence.

Person or Agency Proposing Project: Dennis Norton

Contact Phone Number: (831) 818-0335

- A. ____ The proposed activity is not a project under CEQA Guidelines Section 15378.
- **B.** _____ The proposed activity is not subject to CEQA as specified under CEQA Guidelines Section 15060 (c).
- C. <u>Ministerial Project</u> involving only the use of fixed standards or objective measurements without personal judgment.
- **D.** <u>Statutory Exemption</u> other than a Ministerial Project (CEQA Guidelines Section 15260 to 15285).

E. X Categorical Exemption

Specify type: Class 1 – Existing facilities (Section 15301); Class 3 - New Construction or Conversion of Small Structures (Section 15303)

F. Reasons why the project is exempt:

Construction of an addition and remodel of an existing single family dwelling and accessory dwelling unit in an area designated for residential uses.

In addition, none of the conditions described in Section 15300.2 apply to this project.

Nathan MacBeth

Date: 10/06/23

Nathan MacBeth, Project Planner

Coastal Development Permit Findings

1. That the project is a use allowed in one of the basic zone districts that are listed in LCP Section 13.10.170(D) as consistent with the LCP Land Use Plan designation of the site.

This finding can be made, in that the property is zoned R-1-4 (Single Family Residential (4,000 square foot minimum parcel)), a designation which allows residential uses. The proposed modifications and resulting single family dwelling is a principal permitted use within the zone district, and the zoning is consistent with the site's R-UM (Urban Medium Residential Desnity) General Plan designation.

2. That the project does not conflict with any existing easement or development restrictions such as public access, utility, or open space easements.

This finding can be made, in that no such easements or restrictions are known to encumber the project site.

3. That the project is consistent with the design criteria and special use standards and conditions of this chapter pursuant to SCCC 13.20.130 and 13.20.140 et seq.

This finding can be made, in that the development is consistent with the surrounding neighborhood in terms of architectural style; the site is surrounded by lots developed to an urban density; the colors will be natural in appearance and complementary to the site; and the development site is on a prominent ridge, beach, or bluff top.

4. That the project conforms with the public access, recreation, and visitor-serving policies, standards and maps of the LCP Land Use Plan, including Chapter 2: Section 2.5 and Chapter 7.

This finding can be made, in that the project site is not identified as a priority acquisition site in the County Local Coastal Program and public beach access is available at Seacliff State Beach located approximately 500 feet north of the project site.

5. That the project conforms to all other applicable standards of the certified LCP.

This finding can be made, in that the structure is sited and designed to be visually compatible and integrated with the character of the surrounding neighborhood. Additionally, residential uses are allowed uses in the R-1-4 (Single Family Residential (4,000 square foot minimum parcel)) zone district, as well as the General Plan and Local Coastal Program land use designation. Developed parcels in the area contain single family dwellings. Size and architectural styles vary in the area, and the design submitted is consistent with the pattern of development within the surrounding neighborhood.

6. If the project is located between the nearest through public road and the sea or the shoreline of any body of water located within the Coastal Zone, that the project conforms to the public access and public recreation policies of Chapter 3 of the Coastal Act.

This finding can be made, in that the project site is located between the shoreline and the first public road however, the structure is located at the top of a steep coastal bluff across which there is no public pedestrian access. The nearest public beach access is available at Seacliff State Beach located approximately 500 feet north of the project site. Consequently, the addition and remodel will not interfere with public access to the beach, ocean, or any nearby body of water. Further, the project site is not identified as a priority acquisition site in the County Local Coastal Program.

Development Permit Findings

1. That the proposed location of the project and the conditions under which it would be operated or maintained will not be detrimental to the health, safety, or welfare of persons residing or working in the neighborhood or the general public, and will not result in inefficient or wasteful use of energy, and will not be materially injurious to properties or improvements in the vicinity.

This finding can be made, in that the project is located in an area designated for residential uses. Construction will comply with prevailing building technology, the California Building Code, and the County Building ordinance to ensure the optimum in safety and the conservation of energy and resources. A Geotechnical and Geologic Report prepared by CMAG Engineering dated April 8, 2019, amended January 5, 2021 was reviewed and accepted by county staff under application REV191149. Upon completion of the project, final letters from the project geotechnical engineer and engineering geologist are required to ensure the project has been constructed in compliance with all recommendations provided in the geotechnical and geologic reports.

2. That the proposed location of the project and the conditions under which it would be operated or maintained will be consistent with all pertinent County ordinances and the purpose of the zone district in which the site is located.

This finding can be made, in that the proposed location of the addition and remodel and the conditions under which it would be operated or maintained will be consistent with all pertinent County ordinances and the purpose of the R-1-4 (Single Family Residential (4,000 square foot minimum parcel)) zone district as the primary use of the property will be one single family dwelling that meets all current site standards for the zone district with exception of the front and side yard setbacks which will remain non-conforming.

3. That the proposed use is consistent with all elements of the County General Plan and with any specific plan which has been adopted for the area.

This finding can be made, in that the proposed residential use is consistent with the use and density requirements specified for the R-UM (Urban Medium Residential Desnity) land use designation in the County General Plan.

The proposed addition and remodel will not adversely impact the light, solar opportunities, air, and/or open space available to other structures or properties, and meets all current site and development standards for the zone district as specified in Policy 8.1.3 (Residential Site and Development Standards Ordinance), in that the addition and remodel will not adversely shade adjacent properties, and will meet current setbacks for the zone district.

The proposed addition and remodel will be properly proportioned to the parcel size and the character of the neighborhood as specified in General Plan Policy 8.6.1 (Maintaining a Relationship Between Structure and Parcel Sizes), in that the proposed addition and remodel will comply with the site standards for the R-1-4 zone district (including setbacks, lot coverage, floor area ratio, height, and number of stories) and will result in a structure consistent with a design that could be approved on any similarly sized lot in the vicinity.

A specific plan has not been adopted for this portion of the County.

4. That the proposed use will not overload utilities, and will not generate more than the acceptable level of traffic on the streets in the vicinity.

This finding can be made, in that the proposed project, the construction of first and second story additions and the remodel of an existing single family dwelling, would be constructed on an existing developed lot. The project is not anticipated to result in an increase in level of traffic and the site is currently served by utilities. Consequently, the project will not result in adverse impacts existing roads or intersections in the surrounding area or overload utilities.

5. That the proposed project will complement and harmonize with the existing and proposed land uses in the vicinity and will be compatible with the physical design aspects, land use intensities, and dwelling unit densities of the neighborhood.

This finding can be made, in that the proposed structure is located in a mixed neighborhood containing a variety of architectural styles, and the proposed addition and remodel is consistent with the land use intensity and density of the neighborhood.

6. The proposed development project is consistent with the Design Standards and Guidelines (sections 13.11.070 through 13.11.076), and any other applicable requirements of this chapter.

This finding can be made, in that the proposed addition and remodel will be of an appropriate scale and type of design that will enhance the aesthetic qualities of the surrounding properties and will not reduce or visually impact available open space in the surrounding area.

A specific plan has not been adopted for this portion of the County.

4. That the proposed use will not overload utilities, and will not generate more than the acceptable level of traffic on the streets in the vicinity.

This finding can be made, in that the proposed project, the construction of first and second story additions and the remodel of an existing single family dwelling, would be constructed on an existing developed lot. The project is not anticipated to result in an increase in level of traffic and the site is currently served by utilities. Consequently, the project will not result in adverse impacts existing roads or intersections in the surrounding area or overload utilities.

5. That the proposed project will complement and harmonize with the existing and proposed land uses in the vicinity and will be compatible with the physical design aspects, land use intensities, and dwelling unit densities of the neighborhood.

This finding can be made, in that the proposed structure is located in a mixed neighborhood containing a variety of architectural styles, and the proposed addition and remodel is consistent with the land use intensity and density of the neighborhood.

6. The proposed development project is consistent with the Design Standards and Guidelines (sections 13.11.070 through 13.11.076), and any other applicable requirements of this chapter.

This finding can be made, in that the proposed addition and remodel will be of an appropriate scale and type of design that will enhance the aesthetic qualities of the surrounding properties and will not reduce or visually impact available open space in the surrounding area.

Revised Conditions of Approval

Exhibit D: Project plans, prepared by Kerman Morris Architects, dated 4/18/23.

- I. This permit authorizes the construction of a(n) addition and remodelto an existing single family dwelling as indicated on the approved Exhibit "D" for this permit. This approval does not confer legal status on any existing structure(s) or existing use(s) on the subject property that are not specifically authorized by this permit. Prior to exercising any rights granted by this permit including, without limitation, any construction or site disturbance, the applicant/owner shall:
 - A. Sign, date, and return to Santa Cruz County Planning one copy of the approval to indicate acceptance and agreement with the conditions thereof.
 - B. Obtain a Building Permit from the Santa Cruz County Building Official.
 - 1. Any outstanding balance due to Santa Cruz County Planning must be paid prior to making a Building Permit application. Applications for Building Permits will not be accepted or processed while there is an outstanding balance due.
 - C. Obtain an Encroachment Permit from the Department of Public Works for all offsite work performed in the County road right-of-way.
- II. Prior to issuance of a Building Permit the applicant/owner shall:
 - A. Submit final architectural plans for review and approval by Santa Cruz County Planning. The final plans shall be in substantial compliance with the plans marked Exhibit "D" on file with Santa Cruz County Planning. Any changes from the approved Exhibit "D" for this development permit on the plans submitted for the Building Permit must be clearly called out and labeled by standard architectural methods to indicate such changes. Any changes that are not properly called out and labeled will not be authorized by any Building Permit that is issued for the proposed development. The final plans shall include the following additional information:
 - 1. A copy of the text of these conditions of approval incorporated into the full size sheets of the architectural plan set.
 - 2. One elevation shall indicate materials and colors as they were approved by this Discretionary Application. If specific materials and colors have not been approved with this Discretionary Application, in addition to showing the materials and colors on the elevation, the applicant shall supply a color and material sheet in 8 1/2" x 11" format for Santa Cruz County Planning review and approval.
 - 3. Grading, drainage, and erosion control plans.

- 4. Details showing compliance with fire department requirements.
- B. Meet all requirements of the County Department of Public Works, Stormwater Management. Drainage fees will be assessed on the net increase in impervious area.
 - 1. The final building plans shall adhere to the County Design Criteria (CDC). Existing drainage patterns and rates shall be maintained, and safe stormwater overflow shall be incorporated into the project design.
- C. Meet all requirements of the Soquel Creek Water District. Proof of water service availability is required prior to application for a Building Permit.
- D. Meet all requirements of the Santa Cruz County Sanitation District. Proof of sanitary sewer service availability is required prior to application for a Building Permit.
 - 1. Project shall satisfy all Department of Public Works County of Santa Cruz Design Criteria and Santa Cruz County Sanitation District (SCCSD) requirements.
 - 2. Prior to building permit issuance, the following conditions shall be completed to satisfy the Department of Public Works Sanitation requirements: a.
 - Project shall provide a final plumbing/floor plan and design details that are consistent with the current County of Santa Cruz Sanitation District code and County Design Criteria (SCCSD) Part 4, Sanitary Sewer Design. A sewer profile shall be submitted showing the existing lateral layout and any new connections up to the main within the right-of-way for this parcel.
 - b. Project shall comply with Private Sewer Maintenance requirements as defined in Title 7, Chapter 7.04, Section 7.04.325 of the SCCSD code.
 - c. A sewer lateral inspection video, completed by a licensed plumber, shall be submitted prior to OR in concurrence with the building permit application for review by DPW Sanitation staff. If defects or other issues are identified, a no-cost Sanitation permit, will be required to complete the necessary repairs to the private lateral prior to building permit issuance. Work will be inspected by DPW Sanitation staff.
 - d. SCCSD sewer service, connection and fixture fees shall be administered. Reference Title 5, Chapter 5.04, Section 5.04.080 "New Facilities" and Section 5.04.160 "Sewer Service Charges" of the SCCSD code.

- E. Meet all requirements of the Environmental Planning section of Santa Cruz County Planning.
- F. Meet all requirements and pay any applicable plan check fee of the Central Fire Protection District.
- G. Submit three copies of plan review letters prepared and stamped by the project Geotechnical Engineer which references the current architectural plan set dated April 18, 2023 and civil plan set dated 4/14/2023.
- H. Pay the current fees for Parks mitigation. Currently, these fees are \$4.51 per square foot for single family dwellings, excluding ADUs.
- I. Pay the current fees Child Care mitigation. Currently, these fees are \$0.74 per square foot for single family dwellings, excluding ADUs.
- J. Pay the current Affordable Housing Impact Fee. The fees are based on unit size and the current fee for a dwelling up to 2,000 square feet is \$2 per square foot.
- K. Provide required off-street parking for four (4) cars. Parking spaces must be 8.5 feet wide by 18 feet long and must be located entirely outside vehicular rights-of way. Parking must be clearly designated on the plot plan.
- L. Submit a written statement signed by an authorized representative of the school district in which the project is located confirming payment in full of all applicable developer fees and other requirements lawfully imposed by the school district.
- III. All construction shall be performed according to the approved plans for the Building Permit. Prior to final building inspection, the applicant/owner must meet the following conditions:
 - A. All site improvements shown on the final approved Building Permit plans shall be installed.
 - B. All inspections required by the building permit shall be completed to the satisfaction of the County Building Official.
 - C. The project must comply with all recommendations of the approved soils reports.
 - D. Pursuant to Sections 16.40.040 and 16.42.080 of the County Code, if at any time during site preparation, excavation, or other ground disturbance associated with this development, any artifact or other evidence of an historic archaeological resource or a Native American cultural site is discovered, the responsible persons shall immediately cease and desist from all further site excavation and notify the Sheriff-Coroner if the discovery contains human remains, or the Planning Director if the discovery contains no human remains. The procedures established in Sections 16.40.040 and 16.42.080, shall be observed.

IV. Operational Conditions

- A. In the event that future County inspections of the subject property disclose noncompliance with any Conditions of this approval or any violation of the County Code, the owner shall pay to the County the full cost of such County inspections, including any follow-up inspections and/or necessary enforcement actions, up to and including permit revocation.
- V. Indemnification

The applicant/owner shall indemnify, defend with counsel approved by the COUNTY, and hold harmless the COUNTY, its officers, employees, and agents from and against any claim (including reasonable attorney's fees, expert fees, and all other costs and fees of litigation), against the COUNTY, its officers, employees, and agents arising out of or in connection to this development approval or any subsequent amendment of this development approval which is requested by the applicant/owner, regardless of the COUNTY's passive negligence, but excepting such loss or damage which is caused by the sole active negligence or willful misconduct of the COUNTY. Should the COUNTY in its sole discretion find the applicant's/owner's legal counsel unacceptable, then the applicant/owner shall reimburse the COUNTY its costs of defense, including without limitation reasonable attorney's fees, expert fees, and all other costs and fees of litigation. The applicant/owner shall promptly pay any final judgment rendered against the COUNTY (and its officers, employees, and agents) covered by this indemnity obligation. It is expressly understood and agreed that the foregoing provisions are intended to be as broad and inclusive as is permitted by the law of the State of California and will survive termination of this development approval.

- A. The COUNTY shall promptly notify the applicant/owner of any claim, action, or proceeding against which the COUNTY seeks to be defended, indemnified, or held harmless. The COUNTY shall cooperate fully in such defense.
- B. Nothing contained herein shall prohibit the COUNTY from participating in the defense of any claim, action, or proceeding if both of the following occur:
 - 1. COUNTY bears its own attorney's fees and costs; and
 - 2. COUNTY defends the action in good faith.
- C. <u>Settlement</u>. The applicant/owner shall not be required to pay or perform any settlement unless such applicant/owner has approved the settlement. When representing the COUNTY, the applicant/owner shall not enter into any stipulation or settlement modifying or affecting the interpretation or validity of any of the terms or conditions of the development approval without the prior written consent of the COUNTY.
- D. <u>Successors Bound</u>. The "applicant/owner" shall include the applicant and/or the

owner and the successor'(s) in interest, transferee(s), and assign(s) of the applicant and/or the owner.

Minor variations to this permit which do not affect the overall concept or density may be approved by the Planning Director at the request of the applicant or staff in accordance with Chapter 18.10 of the County Code.

Please note: This permit expires three years from the effective date listed below unless a building permit (or permits) is obtained for the primary structure described in the development permit (does not include demolition, temporary power pole or other site preparation permits, or accessory structures unless these are the primary subject of the development permit). Failure to exercise the building permit and to complete all of the construction under the building permit, resulting in the expiration of the building permit, will void the development permit, unless there are special circumstances as determined by the Planning Director.

Approval Date:	
Effective Date:	
Expiration Date:	

Deputy Zoning Administrator

Appeals: Any property owner, or other person aggrieved, or any other person whose interests are adversely affected by any act or determination of the Zoning Administrator, may appeal the act or determination to the Planning Commission in accordance with chapter 18.10 of the Santa Cruz County Code.




sheet number sheet name | scale


2002


PHOTO OF EXISTING HOUSE FROM BEACH 01

9/13/2023 10:56:48 AM

181 SEACLIFF DRIVE

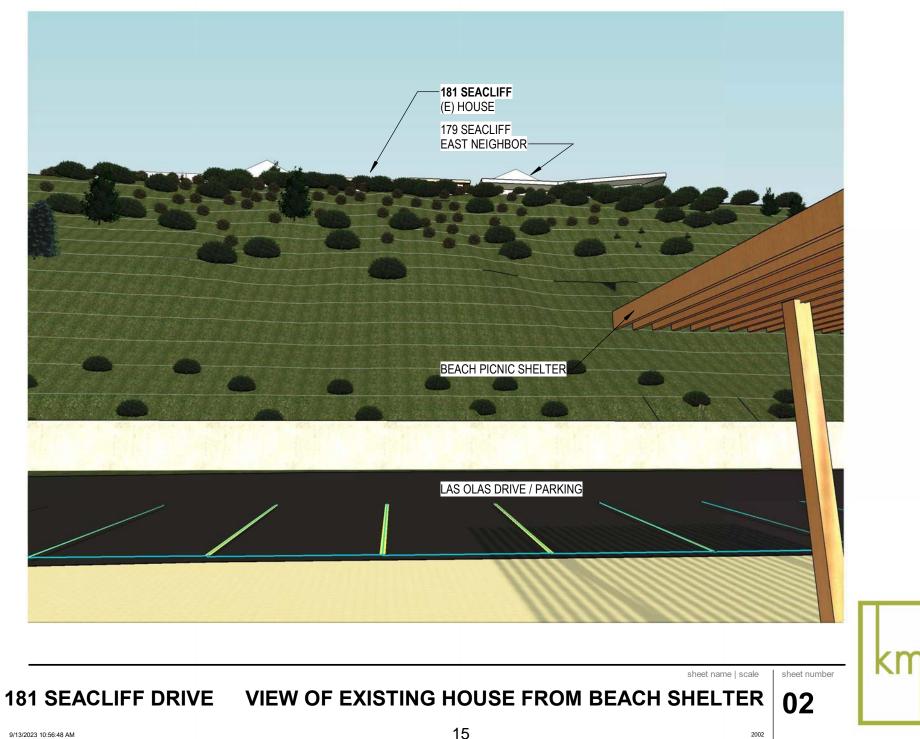

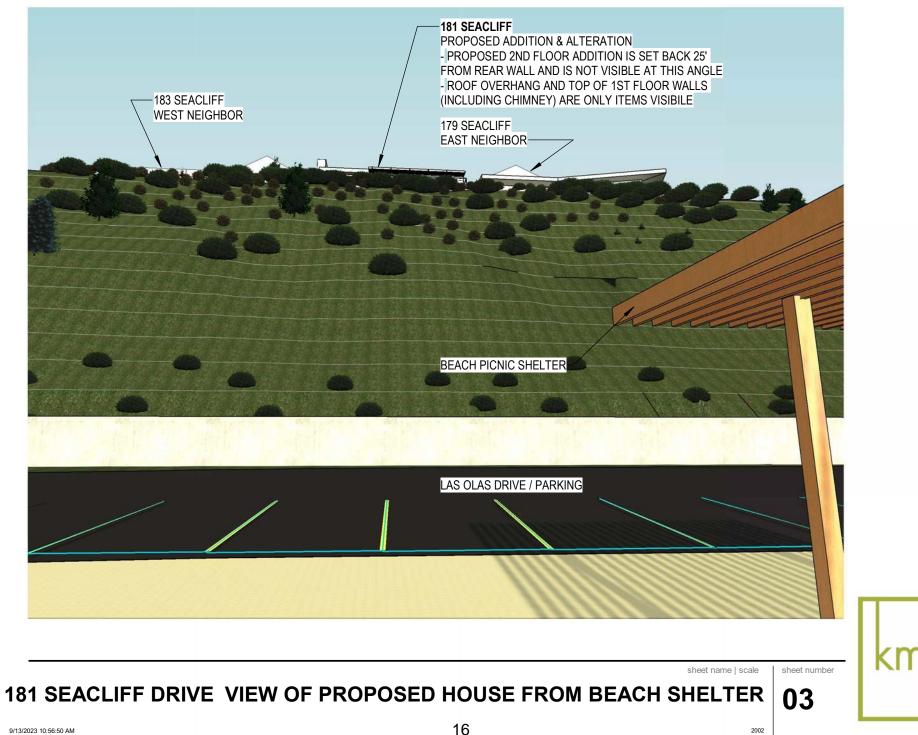

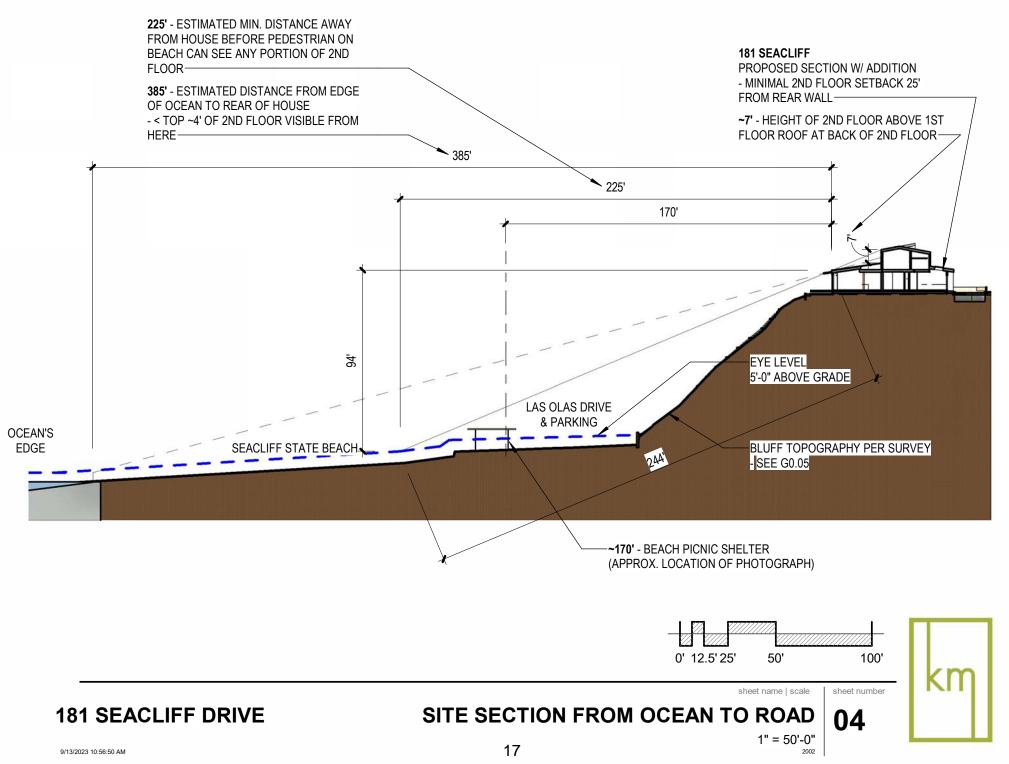

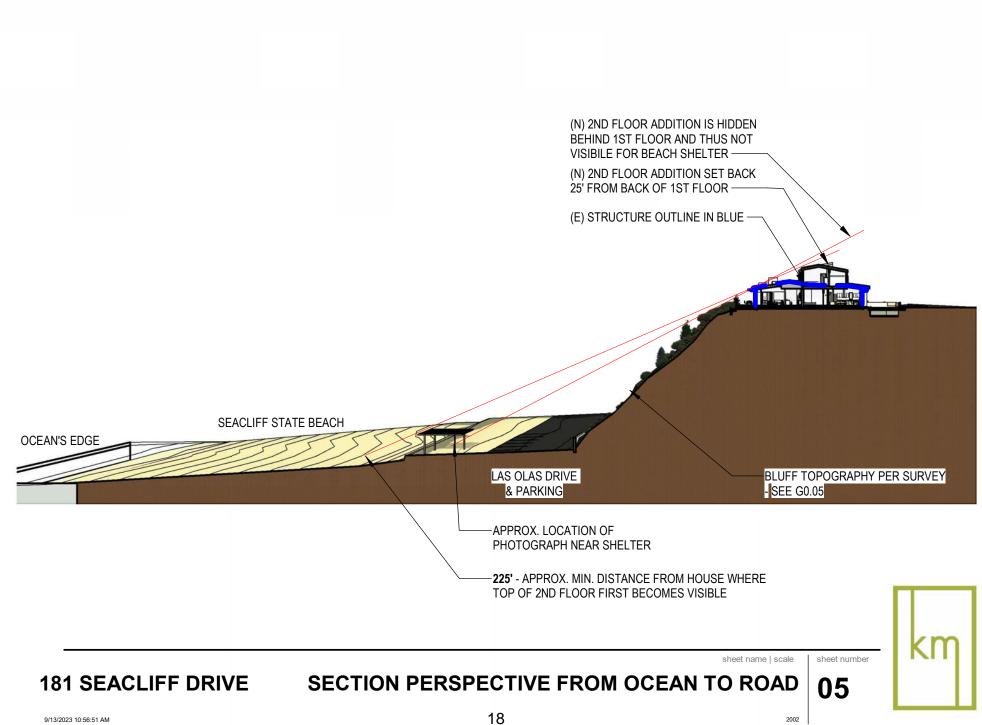


Exhibit 1D



Staff Report to the Zoning Administrator

Applicant: Dennis NortonOwner: Bill KennedyAPN: 042-081-06Site Address: 181 Seacliff Drive, Aptos

Agenda Date: September 1, 2023 Agenda Item #: 2 Time: After 9:00 a.m.

Project Description: Proposal to remodel an existing single-family dwelling and construct an approximately 970 square foot first and second story addition.

Location: Property located at the northwest end of Seacliff Drive approximately 200 feet west of the intersection with San Benito Avenue (181 Seacliff Drive).

Permits Required: Coastal Development Permit

Supervisorial District: Second District (District Supervisor: Zach Friend)

Staff Recommendation:

- Determine that the proposal is exempt from further Environmental Review under the California Environmental Quality Act.
- Approval of Application 211129, based on the attached findings and conditions.

Project Description & Setting

The project is located at the south end of Seacliff State Beach Park, situated between two bluff top parcels, both of which are developed with single family dwellings with attached garages. The topography of the site and surrounding area is relatively flat with the exception of the steep downward slope of the coastal bluff situated at the rear (west side) of the subject parcel.

Existing development on the project site consists of an existing single-story single-family dwelling which is non-conforming to the required 20 foot front yard setback (19'8") and the required five foot side yard (south side) setback (4'6"). Development on the project site complies with all other current zone district site and development standards.

The project proposal entails retention of the existing dwelling to the extent feasible (modifying less than 65% of the major structural components), construction of an approximately 300 square foot first story addition, and remodel of the first floor plan to accommodate a new approximately 550 square foot Accessory Dwelling Unit (ADU). The project also includes construction of an approximately 650 square foot second story addition containing two additional bedrooms.

As proposed and conditioned, the project would fall below the thresholds to be considered "Development" pursuant to SCCC 16.10. The project requires a Coastal Development Permit due to the location of the project site being within the Coastal Appeals Jurisdiction, as mapped, and the proposed scope of work does not qualify for an exemption pursuant to SCCC 13.20. Further, the project site is a mapped scenic resource in the County General Plan/Local Coastal Program (LCP).

A Geotechnical and Geologic report prepared by CMAG Engineering has been submitted for review and accepted by the County Geologist. As indicated in the report and depicted on the project plans (Exhibit D) the 100-year geologic setback has been established to ensure that the proposed additions comply with the Certified LCP and Geologic Hazards ordinance. Modifications to portions of the existing home located within the established geologic setback would not exceed 65% of the major structural components. Further, the proposed additions to the home would not exceed 50% of the square footage of the existing residence.

Zoning & General Plan/Local Coastal Program Consistency

The subject property is approximately 5,500 square foot in size, located in the R-1-4 (Single Family Residential (4,000 square foot minimum parcel)) zone district, a designation which allows residential uses. The proposed continuation of the residential use on site is a principal permitted use within the zone district and the zoning is consistent with the site's R-UM (Urban Medium Residential Desnity) General Plan designation.

The proposed project is in conformance with the County's certified Local Coastal Program, in that the structure is sited and designed to be visually compatible, in scale with, and integrated with the character of the surrounding neighborhood. Developed parcels in the area contain single family dwellings. Size and architectural styles vary in the area, and the design submitted is consistent with the existing range of styles. The project site is located between the shoreline and the first public road and situated at the top of a coastal bluff overlooking Seacliff State Park. The project site is not identified as a priority acquisition site in the County's Local Coastal Program and existing public access Seacliff State Beach is available approximately 500 feet north of the project site.

Design Review

The proposed development is subject to Design Review in that the project site is considered a "sensitive site" as defined in SCCC 13.11.030 (Definitions) as it is located in a mapped scenic area and located on a coastal bluff. As proposed, the project complies with the requirements of the County Design Review Ordinance, in that the proposed project will incorporate site and architectural design features such as variation in roof pitch, increased second story setbacks on the seaward side of the proposed home, use of similar finish colors and materials to homes in the vicinity to reduce the visual impact of the proposed development on surrounding land uses and the natural landscape.

Conclusion

As proposed and conditioned, the project is consistent with all applicable codes and policies of the Zoning Ordinance and General Plan/LCP. Please see Exhibit "B" ("Findings") for a complete

listing of findings and evidence related to the above discussion.

Staff Recommendation

- Determine that the proposal is exempt from further Environmental Review under the California Environmental Quality Act.
- **APPROVAL** of Application Number **211129**, based on the attached findings and conditions.

Supplementary reports and information referred to in this report are on file and available for viewing at the Santa Cruz County Planning Division, and are hereby made a part of the administrative record for the proposed project.

The County Code and General Plan, as well as hearing agendas and additional information are available online at: www.sccoplanning.com

Report Prepared By: Nathan MacBeth Santa Cruz County Planning 701 Ocean Street, 4th Floor Santa Cruz CA 95060 Phone Number: (831) 454-3118 E-mail: nathan.macbeth@santacruzcounty.us

Exhibits

- A. Categorical Exemption (CEQA determination)
- B. Findings
- C. Conditions
- D. Project plans
- E. Assessor's, Location, Zoning and General Plan Maps
- F. Parcel information
- G. Report review letters
- H. Comments & Correspondence

CALIFORNIA ENVIRONMENTAL QUALITY ACT NOTICE OF EXEMPTION

The Santa Cruz County Planning Division has reviewed the project described below and has determined that it is exempt from the provisions of CEQA as specified in Sections 15061 - 15332 of CEQA for the reason(s) which have been specified in this document.

Application Number: 211129 Assessor Parcel Number: 042-081-06 Project Location: 181 Seacliff Drive, Aptos

Project Description: Construction of a first and second story addition and remodel of an existing single family residence.

Person or Agency Proposing Project: Dennis Norton

Contact Phone Number: (831) 818-0335

- A. ____ The proposed activity is not a project under CEQA Guidelines Section 15378.
- **B.** _____ The proposed activity is not subject to CEQA as specified under CEQA Guidelines Section 15060 (c).
- C. <u>Ministerial Project</u> involving only the use of fixed standards or objective measurements without personal judgment.
- **D.** <u>Statutory Exemption</u> other than a Ministerial Project (CEQA Guidelines Section 15260 to 15285).

E. X Categorical Exemption

Specify type: Class 1 – Existing facilities (Section 15301); Class 3 - New Construction or Conversion of Small Structures (Section 15303)

F. Reasons why the project is exempt:

Construction of an addition and remodel of an existing single family dwelling and accessory dwelling unit in an area designated for residential uses.

In addition, none of the conditions described in Section 15300.2 apply to this project.

Nathan MacBeth, Project Planner

Date:_____

Coastal Development Permit Findings

1. That the project is a use allowed in one of the basic zone districts that are listed in LCP Section 13.10.170(D) as consistent with the LCP Land Use Plan designation of the site.

This finding can be made, in that the property is zoned R-1-4 (Single Family Residential (4,000 square foot minimum parcel)), a designation which allows residential uses. The proposed modifications and resulting single family dwelling is a principal permitted use within the zone district, and the zoning is consistent with the site's R-UM (Urban Medium Residential Desnity) General Plan designation.

2. That the project does not conflict with any existing easement or development restrictions such as public access, utility, or open space easements.

This finding can be made, in that no such easements or restrictions are known to encumber the project site.

3. That the project is consistent with the design criteria and special use standards and conditions of this chapter pursuant to SCCC 13.20.130 and 13.20.140 et seq.

This finding can be made, in that the development is consistent with the surrounding neighborhood in terms of architectural style; the site is surrounded by lots developed to an urban density; the colors will be natural in appearance and complementary to the site; and the development site is on a prominent ridge, beach, or bluff top.

4. That the project conforms with the public access, recreation, and visitor-serving policies, standards and maps of the LCP Land Use Plan, including Chapter 2: Section 2.5 and Chapter 7.

This finding can be made, in that the project site is not identified as a priority acquisition site in the County Local Coastal Program and public beach access is available at Seacliff State Beach located approximately 500 feet north of the project site.

5. That the project conforms to all other applicable standards of the certified LCP.

This finding can be made, in that the structure is sited and designed to be visually compatible and integrated with the character of the surrounding neighborhood. Additionally, residential uses are allowed uses in the R-1-4 (Single Family Residential (4,000 square foot minimum parcel)) zone district, as well as the General Plan and Local Coastal Program land use designation. Developed parcels in the area contain single family dwellings. Size and architectural styles vary in the area, and the design submitted is consistent with the pattern of development within the surrounding neighborhood.

6. If the project is located between the nearest through public road and the sea or the shoreline of any body of water located within the Coastal Zone, that the project conforms to the public access and public recreation policies of Chapter 3 of the Coastal Act.

This finding can be made, in that the project site is located between the shoreline and the first

public road. Consequently, the addition and remodel will not interfere with public access to the beach, ocean, or any nearby body of water. Further, the project site is not identified as a priority acquisition site in the County Local Coastal Program.

Development Permit Findings

1. That the proposed location of the project and the conditions under which it would be operated or maintained will not be detrimental to the health, safety, or welfare of persons residing or working in the neighborhood or the general public, and will not result in inefficient or wasteful use of energy, and will not be materially injurious to properties or improvements in the vicinity.

This finding can be made, in that the project is located in an area designated for residential uses. Construction will comply with prevailing building technology, the California Building Code, and the County Building ordinance to ensure the optimum in safety and the conservation of energy and resources. A Geotechnical and Geologic Report prepared by CMAG Engineering dated April 8, 2019, amended January 5, 2021 was reviewed and accepted by county staff under application REV191149. Upon completion of the project, final letters from the project geotechnical engineer and engineering geologist are required to ensure the project has been constructed in compliance with all recommendations provided in the geotechnical and geologic reports.

2. That the proposed location of the project and the conditions under which it would be operated or maintained will be consistent with all pertinent County ordinances and the purpose of the zone district in which the site is located.

This finding can be made, in that the proposed location of the addition and remodel and the conditions under which it would be operated or maintained will be consistent with all pertinent County ordinances and the purpose of the R-1-4 (Single Family Residential (4,000 square foot minimum parcel)) zone district as the primary use of the property will be one single family dwelling that meets all current site standards for the zone district with exception of the front and side yard setbacks which will remain non-conforming.

3. That the proposed use is consistent with all elements of the County General Plan and with any specific plan which has been adopted for the area.

This finding can be made, in that the proposed residential use is consistent with the use and density requirements specified for the R-UM (Urban Medium Residential Desnity) land use designation in the County General Plan.

The proposed addition and remodel will not adversely impact the light, solar opportunities, air, and/or open space available to other structures or properties, and meets all current site and development standards for the zone district as specified in Policy 8.1.3 (Residential Site and Development Standards Ordinance), in that the addition and remodel will not adversely shade adjacent properties, and will meet current setbacks for the zone district.

The proposed addition and remodel will be properly proportioned to the parcel size and the character of the neighborhood as specified in General Plan Policy 8.6.1 (Maintaining a Relationship Between Structure and Parcel Sizes), in that the proposed addition and remodel will comply with the site standards for the R-1-4 zone district (including setbacks, lot coverage, floor area ratio, height, and number of stories) and will result in a structure consistent with a design that could be approved on any similarly sized lot in the vicinity.

A specific plan has not been adopted for this portion of the County.

4. That the proposed use will not overload utilities, and will not generate more than the acceptable level of traffic on the streets in the vicinity.

This finding can be made, in that the proposed project, the construction of first and second story additions and the remodel of an existing single family dwelling, would be constructed on an existing developed lot. The project is not anticipated to result in an increase in level of traffic and the site is currently served by utilities. Consequently, the project will not result in adverse impacts existing roads or intersections in the surrounding area or overload utilities.

5. That the proposed project will complement and harmonize with the existing and proposed land uses in the vicinity and will be compatible with the physical design aspects, land use intensities, and dwelling unit densities of the neighborhood.

This finding can be made, in that the proposed structure is located in a mixed neighborhood containing a variety of architectural styles, and the proposed addition and remodel is consistent with the land use intensity and density of the neighborhood.

6. The proposed development project is consistent with the Design Standards and Guidelines (sections 13.11.070 through 13.11.076), and any other applicable requirements of this chapter.

This finding can be made, in that the proposed addition and remodel will be of an appropriate scale and type of design that will enhance the aesthetic qualities of the surrounding properties and will not reduce or visually impact available open space in the surrounding area.

Conditions of Approval

Exhibit D: Project plans, prepared by Kerman Morris Architects, dated 4/18/23.

- I. This permit authorizes the construction of a(n) addition and remodelto an existing single family dwelling as indicated on the approved Exhibit "D" for this permit. This approval does not confer legal status on any existing structure(s) or existing use(s) on the subject property that are not specifically authorized by this permit. Prior to exercising any rights granted by this permit including, without limitation, any construction or site disturbance, the applicant/owner shall:
 - A. Sign, date, and return to Santa Cruz County Planning one copy of the approval to indicate acceptance and agreement with the conditions thereof.
 - B. Obtain a Building Permit from the Santa Cruz County Building Official.
 - 1. Any outstanding balance due to Santa Cruz County Planning must be paid prior to making a Building Permit application. Applications for Building Permits will not be accepted or processed while there is an outstanding balance due.
 - C. Obtain an Encroachment Permit from the Department of Public Works for all offsite work performed in the County road right-of-way.
- II. Prior to issuance of a Building Permit the applicant/owner shall:
 - A. Submit final architectural plans for review and approval by Santa Cruz County Planning. The final plans shall be in substantial compliance with the plans marked Exhibit "D" on file with Santa Cruz County Planning. Any changes from the approved Exhibit "D" for this development permit on the plans submitted for the Building Permit must be clearly called out and labeled by standard architectural methods to indicate such changes. Any changes that are not properly called out and labeled will not be authorized by any Building Permit that is issued for the proposed development. The final plans shall include the following additional information:
 - 1. A copy of the text of these conditions of approval incorporated into the full size sheets of the architectural plan set.
 - 2. One elevation shall indicate materials and colors as they were approved by this Discretionary Application. If specific materials and colors have not been approved with this Discretionary Application, in addition to showing the materials and colors on the elevation, the applicant shall supply a color and material sheet in 8 1/2" x 11" format for Santa Cruz County Planning review and approval.
 - 3. Grading, drainage, and erosion control plans.

- 4. Details showing compliance with fire department requirements.
- B. Meet all requirements of the County Department of Public Works, Stormwater Management. Drainage fees will be assessed on the net increase in impervious area.
 - 1. The final building plans shall adhere to the County Design Criteria (CDC). Existing drainage patterns and rates shall be maintained, and safe stormwater overflow shall be incorporated into the project design.
- C. Meet all requirements of the Soquel Creek Water District. Proof of water service availability is required prior to application for a Building Permit.
- D. Meet all requirements of the Santa Cruz County Sanitation District. Proof of sanitary sewer service availability is required prior to application for a Building Permit.
 - 1. Project shall satisfy all Department of Public Works County of Santa Cruz Design Criteria and Santa Cruz County Sanitation District (SCCSD) requirements.
 - 2. Prior to building permit issuance, the following conditions shall be completed to satisfy the Department of Public Works Sanitation requirements: a.
 - Project shall provide a final plumbing/floor plan and design details that are consistent with the current County of Santa Cruz Sanitation District code and County Design Criteria (SCCSD) Part 4, Sanitary Sewer Design. A sewer profile shall be submitted showing the existing lateral layout and any new connections up to the main within the right-of-way for this parcel.
 - b. Project shall comply with Private Sewer Maintenance requirements as defined in Title 7, Chapter 7.04, Section 7.04.325 of the SCCSD code.
 - c. A sewer lateral inspection video, completed by a licensed plumber, shall be submitted prior to OR in concurrence with the building permit application for review by DPW Sanitation staff. If defects or other issues are identified, a no-cost Sanitation permit, will be required to complete the necessary repairs to the private lateral prior to building permit issuance. Work will be inspected by DPW Sanitation staff.
 - d. SCCSD sewer service, connection and fixture fees shall be administered. Reference Title 5, Chapter 5.04, Section 5.04.080 "New Facilities" and Section 5.04.160 "Sewer Service Charges" of the SCCSD code.

- E. Meet all requirements of the Environmental Planning section of Santa Cruz County Planning.
- F. Meet all requirements and pay any applicable plan check fee of the Central Fire Protection District.
- G. Submit three copies of plan review letters prepared and stamped by the project Geotechnical Engineer which references the current architectural plan set dated April 18, 2023 and civil plan set dated 4/14/2023.
- H. Pay the current fees for Parks mitigation. Currently, these fees are \$4.51 per square foot for single family dwellings, excluding ADUs. Revised by ZA 09/01/23
- I. Pay the current fees Child Care mitigation. Currently, these fees are \$0.74 per square foot for single family dwellings, excluding ADUs. *Revised by ZA* 09/01/23.

J. <u>Pay the current fees for Roadside and Transportation improvements for</u> <u>three additional bedrooms. Please contact the Department of Public Works</u> <u>for a current list of applicable fees.</u> *Omitted by ZA 09/01/23*

K. Pay the current Affordable Housing Impact Fee. The fees are based on unit size and the current fee for a dwelling up to 2,000 square feet is \$2 per square foot.

L. Pay the current Affordable Housing Impact Fee. The fees are based on unit size and the current fee for an accessory dwelling unit is \$2 per square foot. Omitted by ZA 09/01/23

- M. Provide required off-street parking for four (4) cars. Parking spaces must be 8.5 feet wide by 18 feet long and must be located entirely outside vehicular rights-of way. Parking must be clearly designated on the plot plan.
- N. Submit a written statement signed by an authorized representative of the school district in which the project is located confirming payment in full of all applicable developer fees and other requirements lawfully imposed by the school district.
- III. All construction shall be performed according to the approved plans for the Building Permit. Prior to final building inspection, the applicant/owner must meet the following conditions:
 - A. All site improvements shown on the final approved Building Permit plans shall be installed.
 - B. All inspections required by the building permit shall be completed to the satisfaction of the County Building Official.
 - C. The project must comply with all recommendations of the approved soils reports.

- D. Pursuant to Sections 16.40.040 and 16.42.080 of the County Code, if at any time during site preparation, excavation, or other ground disturbance associated with this development, any artifact or other evidence of an historic archaeological resource or a Native American cultural site is discovered, the responsible persons shall immediately cease and desist from all further site excavation and notify the Sheriff-Coroner if the discovery contains human remains, or the Planning Director if the discovery contains no human remains. The procedures established in Sections 16.40.040 and 16.42.080, shall be observed.
- IV. Operational Conditions
 - A. In the event that future County inspections of the subject property disclose noncompliance with any Conditions of this approval or any violation of the County Code, the owner shall pay to the County the full cost of such County inspections, including any follow-up inspections and/or necessary enforcement actions, up to and including permit revocation.
- V. Indemnification

The applicant/owner shall indemnify, defend with counsel approved by the COUNTY, and hold harmless the COUNTY, its officers, employees, and agents from and against any claim (including reasonable attorney's fees, expert fees, and all other costs and fees of litigation), against the COUNTY, its officers, employees, and agents arising out of or in connection to this development approval or any subsequent amendment of this development approval which is requested by the applicant/owner, regardless of the COUNTY's passive negligence, but excepting such loss or damage which is caused by the sole active negligence or willful misconduct of the COUNTY. Should the COUNTY in its sole discretion find the applicant's/owner's legal counsel unacceptable, then the applicant/owner shall reimburse the COUNTY its costs of defense, including without limitation reasonable attorney's fees, expert fees, and all other costs and fees of litigation. The applicant/owner shall promptly pay any final judgment rendered against the COUNTY (and its officers, employees, and agents) covered by this indemnity obligation. It is expressly understood and agreed that the foregoing provisions are intended to be as broad and inclusive as is permitted by the law of the State of California and will survive termination of this development approval.

- A. The COUNTY shall promptly notify the applicant/owner of any claim, action, or proceeding against which the COUNTY seeks to be defended, indemnified, or held harmless. The COUNTY shall cooperate fully in such defense.
- B. Nothing contained herein shall prohibit the COUNTY from participating in the defense of any claim, action, or proceeding if both of the following occur:
 - 1. COUNTY bears its own attorney's fees and costs; and

- 2. COUNTY defends the action in good faith.
- C. <u>Settlement</u>. The applicant/owner shall not be required to pay or perform any settlement unless such applicant/owner has approved the settlement. When representing the COUNTY, the applicant/owner shall not enter into any stipulation or settlement modifying or affecting the interpretation or validity of any of the terms or conditions of the development approval without the prior written consent of the COUNTY.
- D. <u>Successors Bound</u>. The "applicant/owner" shall include the applicant and/or the owner and the successor'(s) in interest, transferee(s), and assign(s) of the applicant and/or the owner.

Minor variations to this permit which do not affect the overall concept or density may be approved by the Planning Director at the request of the applicant or staff in accordance with Chapter 18.10 of the County Code.

Please note: This permit expires three years from the effective date listed below unless a building permit (or permits) is obtained for the primary structure described in the development permit (does not include demolition, temporary power pole or other site preparation permits, or accessory structures unless these are the primary subject of the development permit). Failure to exercise the building permit and to complete all of the construction under the building permit, resulting in the expiration of the building permit, will void the development permit, unless there are special circumstances as determined by the Planning Director.

Approval Date:

Effective Date:

Expiration Date:

Deputy Zoning Administrator

Appeals: Any property owner, or other person aggrieved, or any other person whose interests are adversely affected by any act or determination of the Zoning Administrator, may appeal the act or determination to the Planning Commission in accordance with chapter 18.10 of the Santa Cruz County Code.

181 SEACLIFF DRIVE

ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)



PROJECT CONSULTANTS:

DESIGN AND PROCESSING: DENNIS NORTON DESIGN 712#C CAPITOLA AVE, CAPITOLA, CA 95010 831-818-0335 DENNIS@DENNISNORTONDESIGN.COM

ARCHITECT:

KERMAN MORRIS ARCHITECTS 139 NOE ST, SAN FRANCISCO, CA 94114 415-749-0302 EDWARD TOBY MORRIS: TOBY@KERMANMORRIS.COM

CIVIL ENGINEER:

C2G/CIVIL CONSULTANTS 4444 SCOTTS VALLEY DR, SUITE 6, SCOTTS VALLEY, CA 95066 831-438-4420 JAMIE BUSHONG: JAMIE@C2GENGRS.COM

GEOTECHNICAL ENGINEER:

CMAG Engineering PO Box 640, Aptos, CA 95001 831-475-1411 ADRIAN L. GARNER: ADRIAN@CMAGENGINEERING.COM

LANDSCAPE ARCHITECT:

SSA LANDSCAPE ARCHITECTS LANDSCAPE ARCHITECTURE 303 POTRERO ST, SUITE 40-C, SANTA CRUZ, CA 95060 831-459-0455 ALISON HOBBS: FELIX_AL@HOTMAIL.COM

GROSS BUILDING AREA BREAKDOWN

BY FLOOR (ENCLOSED AREA)*				
LEVEL EXISTING ADDITIONAL TOTAL				
FIRST FLOOR	2393 SF	306 SF	2699 SF	
SECOND FLOOR	0 SF	653 SF	653 SF	
	2393 SF	959 SF	3352 SF	

* INCLUDES GARAGE & EVERYTHING WITHIN BUILDING FOOTPRINT, REFER TO CHART BELOW FOR FLOOR AREA RATIO, LOT COVERAGE, AND HABITABLE SPACE AREA BREAKDOWN


			FLOOR AREA RATIO (FAR)		LOT COVERAGE (LC)			HABITABLE SPACE AREA (HSA)		
Name	Area**	Area Type	Counts in FAR	FAR Allowed Deduction	FAR Qualifying Area	Counts in Lot Coverage	LC Allowed Deduction	LC Qualifying Area	Counts in HSA	HSA Qualifying Area
FIRST FLOOR										
1ST FLOOR - MAIN HOUSE	1691 SF	Gross Building Area	Yes	0 SF	1691 SF	Yes	0 SF	1691 SF	Yes	1691 SF
ADU	546 SF	Gross Building Area	Yes	800 SF	0 SF	Yes	800 SF	0 SF	Yes	546 SF
CHIMNEY	14 SF	Gross Building Area	No	0 SF	0 SF	Yes	0 SF	14 SF	No	0 SF
GARAGE / UNCONDITIONED AREA	481 SF	Gross Building Area	Yes	225 SF	247 SF	Yes	0 SF	481 SF	No	0 SF
ADU UNCOVERED PATIO	237 SF	Exterior Area	No	0 SF	0 SF	No	0 SF	0 SF	No	0 SF
COVERED EAVE	56 SF	Exterior Area	Yes	140 SF	0 SF	No	0 SF	0 SF	No	0 SF
DECK (UNCOVERED) > 18" ABOVE GRADE	195 SF	Exterior Area	No	0 SF	0 SF	Yes	0 SF	195 SF	No	0 SF
3	3219 SF				1938 SF			2380 SF		2237 SF
SECOND FLOOR										
2ND FLOOR AREA	653 SF	Gross Building Area	Yes	0 SF	653 SF	No	0 SF	0 SF	Yes	653 SF
DOUBLE-HEIGHT >/=16'	70 SF	Gross Building Area	Yes	0 SF	70 SF	No	0 SF	0 SF	No	0 SF
2ND FLOOR UNCOVERED DECK	372 SF	Exterior Area	No	0 SF	0 SF	No	0 SF	0 SF	No	0 SF
i	1095 SF				723 SF			0 SF		653 SF
GRAND TOTAL: 13	4314 SF	FLOO		ATIO MAX ARE/ 2,955.7 SF MAX		[42% OI	LOT COVERAG R 2,387.3 SF MAX		HABITABLE SPACE / [50% INCREA: 2,896.5 SF	SE OR

PREVAILING CODES & REGULATIONS

2019 CALIFORNIA BUILDING CODE 2019 CALIFORNIA ELECTRICAL CODE 2019 CALIFORNIA MECHANICAL CODE 2019 CALIFORNIA PLUMBING CODE 2019 CALIFORNIA ENERGY CODE 2019 GREEN BUILDING CODE

PROJECT INFORMATION

		BILL AND ALYCIA KENNEDY 162 SEACLIFF DRIVE APTOS, CA 95003 T: (831) 661-0564
PROJECT ADDRESS:		181 SEACLIFF DRIVE APTOS, CA 95003
	PARCEL:	01/ 04
	SFDBI BPA #:	211129
	ZONING DISTRICT:	R-1-4
OCCUPANCY GROUP:		R-3
CONSTRUCTION TYPE:		V-B / NO SPRINKLERS PROPOSED
	ARCHITECT:	KERMAN MORRIS ARCHITECTS 139 NOE STREET SAN FRANCISCO, CA 94114 T: (415) 749-0302
LOT	SIZE	
Area	Area (Acres)	
5,684 SF	0.130 acres	

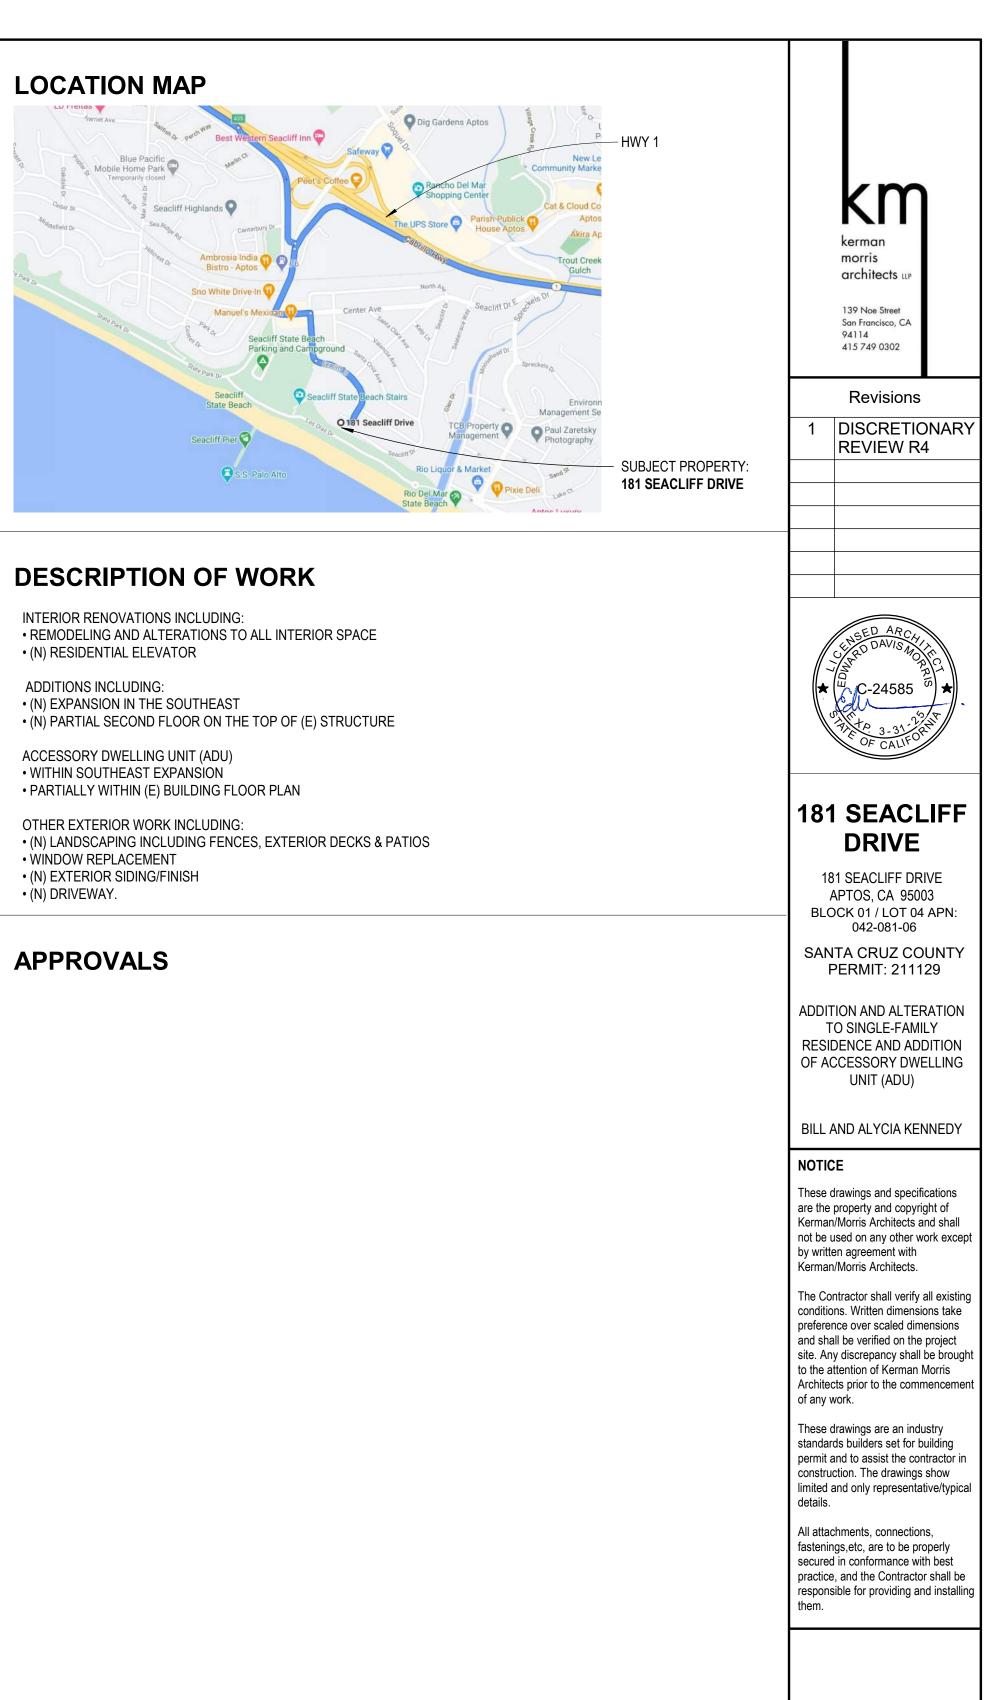

DISCRETIONARY REVIEW SET R5

04/18/2023

SFDBI BPA#: 211129

G0.01

COVER SHEET

04/18/2023

1 : 12000

2002

DATE

SCALE

DRAWN BY

CHECKED BY

JOB NO.

GENERAL NOTES

A. GENERAL NOTES:

- 1. THE CONTRACTOR SHALL PROVIDE COMPLETE PROJECT SYSTEMS AND COMPONENTS AND COMPLY WITH ALL REQUIREMENTS INDICATED ON THE PROJECT DOCUMENTS.
- 2. WORK WITHIN THE AREA BOUNDARIES INDICATED IN THE PROJECT DOCUMENTS AND COMPLY WITH ALL APPLICABLE BUILDING CODE, REGULATION, & ORDINANCE REQUIREMENTS. OCCUPANTS ADJACENT TO THE PROJECT AREA BOUNDARIES SHALL CONTINUE UNINTERRUPTED OCCUPANCY DURING CONSTRUCTION OF THE PROJECT.
- 3. VERIFY FIELD CONDITIONS AND COORDINATION WITH THE PROJECT DOCUMENTS PRIOR TO PROCEEDING WITH THE WORK.
- 4. COORDINATE THE WORK WITH ALL REQUIREMENTS INDICATED IN THE PROJECT DOCUMENTS.
- 5. PERFORM THE WORK AT THE PROJECT SITE DURING NORMAL BUSINESS HOURS, UNLESS OTHERWISE NOTED.
- 6. COORDINATE THE WORK WITH EQUIPMENT, FURNISHINGS AND SYSTEMS PROVIDED BY THE OWNER.

B. DEFINITIONS:

- 1. "TYPICAL" OR "TYP" INDICATES IDENTICAL COMPLETE SYSTEM SHALL BE PROVIDED FOR EACH OCCURRENCE OF THE CONDITION NOTED.
- 2. "SIMILAR" INDICATES COMPLETE SYSTEM AND COMPONENTS SHALL BE PROVIDED COMPARABLE TO THE
- CHARACTERISTICS FOR THE CONDITION NOTED. 3. "AS REQUIRED" INDICATES COMPONENTS REQUIRED TO COMPLETE THE NOTED, SYSTEM AS INDICATED IN THE
- PROJECT DOCUMENTS, SHALL BE PROVIDED 4. "ALIGN" INDICATES ACCURATELY PROVIDE FINISH FACES OF MATERIALS IN STRAIGHT, TRUE AND PLUMB RELATION TO ADJACENT MATERIALS.

C. DIMENSIONS:

- 1. DIMENSIONS ARE INDICATED TO THE CENTERLINE OF THE STRUCTURAL GRID, FACE OF CONCRETE WALL, NOMINAL FACE OF CMU WALL, FACE OF PARTITION AS SCHEDULED, UNLESS OTHERWISE NOTED.
- 2. ALIGNMENT OF PARTITIONS AND FINISHES AS SCHEDULED SHALL BE STRAIGHT, TRUE & PLUMB. THE PRIORITY FOR PROJECT DIMENSIONS SHALL BE IN THE FOLLOWING ORDER:
- A. STRUCTURAL DRAWINGS
- B. LARGE SCALE DETAILS C. SMALL SCALE DETAILS
- D. ENLARGED VIEWS
- E. FLOOR PLANS AND ELEVATIONS
- 3. MINIMUM DIMENSIONS FOR ACCESSIBILITY CLEARANCES AND BUILDING CODE REQUIREMENTS SHALL BE MAINTAINED.
- 4. FLOOR ELEVATIONS ARE INDICATED TO THE FACE OF THE STRUCTURAL SLAB, UNLESS OTHERWISE NOTED.
- 5. VERTICAL DIMENSIONS ARE INDICATED FROM THE FLOOR ELEVATION TO FACE OF FINISHED MATERIAL, UNLESS NOTED ABOVE FINISH FLOOR -"AFF".
- 6. CEILING HEIGHTS ARE INDICATED FROM THE FLOOR ELEVATION TO THE FACE OF SUSPENDED ACOUSTIC PANEL CEILING GRID OR FACE OF FINISH MATERIAL FOR OTHER CEILING TYPES, UON.
- 7. DIMENSIONS SHOWN ON THE DRAWINGS SHALL INDICATE THE REQUIRED SIZE, CLEARANCE AND DIMENSIONAL RELATIONSHIP BETWEEN PROJECT SYSTEMS AND COMPONENTS. DIMENSIONS SHALL NOT BE DETERMINED BY SCALING THE DRAWINGS.
- D. DRAWING SET ORGANIZATION:
- 1. EACH DRAWING SET SHEET IS IDENTIFIED BY THE SHEET NUMBER IN THE LOWER RIGHT HAND CORNER OF THE DRAWING TITLE BLOCK. THE SHEET TITLE PROVIDES A GENERAL DESCRIPTION OF THE CONTENTS OF THE SHEFT.
- SHEET NUMBER EXAMPLE: A201 "A" INDICATES THE DISCIPLINE THAT CREATED THE DRAWING
- "2" INDICATES THE DRAWING CATEGORY CONTAINED ON THE SHEET "01" INDICATES THE SHEET NUMBER
- 2. SHEET NUMBERS MAY INCLUDE SUPPLEMENTAL CHARACTERS TO PROVIDE ADDITIONAL INFORMATION, SUCH AS DRAWING CONTENT, PROJECT SECTOR OR PHASE. REFER TO THE DRAWING INDEX FOR A COMPLETE LIST
- OF SHEETS INCLUDED IN THE DOCUMENT SET.
- EXAMPLE: EL201A "EL" INDICATES THE DISCIPLINE THAT CREATED THE DRAWING AND THE DRAWING CONTENT =
- ELECTRICAL LIGHTING "A" INDICATES SECTOR "A" OF PLAN SHEET "201". REFER TO THE PROJECT KEY PLAN OR COMPOSITE PLAN INDICATING THE RELATIONSHIP OF THE SECTORS.
- 3. DRAWING SET INDEX INDICATES THE COMPLETE LIST OF SHEETS CONTAINED IN THE DRAWING SET, INDEXED BY DISCIPLINE, SHEET NUMBER AND SHEET TITLE, IN SEQUENTIAL ORDER. NOTE THAT ALL SEQUENTIAL SHEET NUMBERS MAY BE NOT USED IN THE DRAWING SET.
- 4. DISCIPLINE IDENTIFICATION, IN ORDER BOUND IN THE DRAWING SET. REFER TO THE DRAWING SET INDEX FOR DISCIPLINE CONTAINED IN THIS DRAWING SET:

GENERAL INFORMATION	Q EQUIPMENT
CIVIL	F FIRE PROTECTION
LANDSCAPE	P PLUMBING
STRUCTURAL	M MECHANICAL
ARCHITECTURAL	E ELECTRICAL
INTERIORS	T TELECOMMUNICATIONS

5. DRAWING CATEGORY IDENTIFICATION. REFER TO THE DRAWING SET INDEX FOR DISCIPLINES, CATEGORIES AND SHEET NUMBERS CONTAINED IN THIS DRAWING SET:

SIGNED PREPARER STATEMENT

THE PREPARER IS LICENSED UNDER CHAPTER 3 OF DIVISION 3 OF THE CALIFORNIA BUSINESS AND PROFESSIONS CODE (OR OTHERWISE LICENSED IN THIS STATE) TO PREPARE SUCH PLANS AND SPECIFICATIONS, TOGETHER WITH PROOF THEREOF SATISFACTORY TO THE COUNTY.

PREPARER SIGNATURE: PREPARER NAME: EDWARD "TOBY" MORRIS LICENSE: LICENSED ARCHITECT IN THE STATE OF CALIFORNIA LICENSE #: C-24585 EXP.: 3/31/2023

DATE: 9/30/2022

& @ o (E) (N) ' " % ± #	AND AT DEGREES DIAMETER OR ROUND EXISTING NEW FOOT / FEET INCH / INCHES PERCENT PLUS / MINUS POUND OR NUMBER
add'l adj aff alt alum approx	ANCHOR BOLT ADDITIONAL ADJACENT ABOVE FINISH FLOOR ALTERNATE ALUMINUM APPROXIMATE ARCHITECTURAL
B.O. BD BLDG	Bottom of Board Building
CAB CBC CEC CEM CER CF CFC CFCI CFCI	CALIFORNIA ENERGY CODE CEMENT CERAMIC CUBIC FEET CALIFORNIA FIRE CODE CONTRACTOR FURNISHED, CONTRACTOR INSTALLED CONTRACTOR FURNISHED,
CJ CL CLG	OWNER INSTALLED CONTROL JOINT CENTER LINE CEILING

ABBREVIATIONS

& @ 0 (E) (N) ' " % ± # AB	AND AT DEGREES DIAMETER OR ROUND EXISTING NEW FOOT / FEET INCH / INCHES PERCENT PLUS / MINUS POUND OR NUMBER ANCHOR BOLT	d DBL DEPT DF DH DIA DIM DN DN DP DR DR DS DTL DWG	PENNY DOUBLE DEPARTMENT DOUGLAS FIR DOUBLE HUNG DIAMETER DIMENSION DOWN DRAIN PIPE DOOR DOWNSPOUT DETAIL DRAWING
ADD'L		DWO	
ADJ AFF ALT ALUM	ADJACENT ABOVE FINISH FLOOR ALTERNATE	E EA EERO EL ELEC ELEV	
	POTTOM OF	ELEV EQ	EQUAL
B.O.	BOTTOM OF	EQUIP	
BD BLDG	BOARD BUILDING	EXT	EXTERIOR
BLDG	BOILDING	EXT	
CAB CBC	CABINET CALIFORNIA BUILDING CODE	FA FC	FIRE ALARM FOOT-CANDLE
CEC	CALIFORNIA ENERGY CODE	FD FDC	FLOOR DRAIN FIRE DEPARTMENT
CEM	CEMENT	FDC	CONNECTION
CER		FDN	FOUNDATION
CF CFC	CUBIC FEET CALIFORNIA FIRE CODE	FE	FIRE EXTINGUISHER
CFCI	CONTRACTOR FURNISHED, CONTRACTOR INSTALLED	FEC	FIRE EXTINGUISHER W/ CABINET
CFOI	CONTRACTOR FURNISHED, OWNER INSTALLED	FF FIN	FINISH FLOOR FINISH
CJ	CONTROL JOINT	FLR	FLOOR / FLOORING
CL	CENTER LINE	FLUOR	FLUORESCENT
CLG	CEILING	FO	FACE OF
CLR	CLEAR	FOC	FACE OF CONCRETE / CURB
CMU	CONCRETE MASONRY UNIT	FOF	FACE OF FINISH
COL	COLUMN	FOS	FACE OF STUD
CONC	CONCRETE	FT	FOOT OR FEET
CONST	CONSTRUCTION	FTG	FOOTING
CONT	CONTINUOUS	FTS	FABRIC COVERED TACK SURFACE
CPC	CALIFORNIA PLUMBING CODE	FURG	FURRING
CPT	CARPET		
CTR	CENTER		

GA GAUGE NORTH Ν NOT APPLIC GALV GALVANIZED N/A GC GENERAL CONTRACTOR NIC NOT IN CON GEN GENERAL NO NUMBER GROUND FAULT INTERRUPT GFIC NRC NOISE RED CIRCUIT COEFFICIEN NTS NOT TO SC GND GROUND GYPSUM WALL BOARD GWB GYP GYPSUM OC ON CENTER OFCI OWNER FU CONTRAC HOSE BIB HB OWNER F OFOI HEAVY DUTY HD INSTALLED HOLLOW METAL HM OPPOSITE OH HORZ HORIZONTAL OPNG OPENING HR HOUR HSS HOLLOW STEEL SECTION PL PROPERTY ΗT HEIGHT PLAM PLASTIC LA HVAC HEATING, VENTILATING, AND PLUMB PLUMBING AIR CONDITIONING PLY/PLY PLYWOOD HOT WATER HEATER HWH WD POC POINT OF C INCH OR INCHES IN PSF POUNDS PE INSULATE / INSULATION / INS PSI POUNDS PE INSULATING PTDF PRESSURE INTERIOR INT DOUGLAS PARTITION PTN J BOX JUNCTION BOX ΡV PHOTOVOL JOINT RADIUS (IN R ANGLE / LONG / LENGTH RISER LAV LAVATORY RAD RADIUS POUND / POUNDS LBS RCP REFLECTED LINEAR FEET LF RD ROOF DRAI LEVEL LVL REF REFERENCI LWC LIGHT WEIGHT CONCRETE REFR REFRIGERA REG REGISTER MAX MAXIMUM REINF REINFORCE MECH MECHANICAL REQ REQUIRED MFR MANUFACTURER RM ROOM MH MANHOLE RO ROUGH OPI MINIMUM MIN REDWOOD RWD MISC MISCELLANEOUS RWL RAIN WATE MTD MOUNTED MTG MOUNTING MTL METAL

GENERAL LEGEND

1 A101	BUILDING / WALL SECTION
1 A101 REF	EXTERIOR ELEVATION
x	COLUMN LINE
\$	ELEVATION MARKER
	CENTER LINE
<u> </u>	PROPERTY LINE
A3	WALL TYPE PARTITION
XXX	KEYNOTE
	SHEET NOTE
101	DOOR TAG

SHEET INDEX

01 GENE	RAL	04 ARCHI	ITECTURAL EXISTING
G0.01	COVER SHEET	AE1.01	EXISTING SITE PLAN
G0.02	SHEET INDEX, ABBREV., SYMBOLS & GENERAL NOTES	AE2.01	EXISTING FLOOR PLANS
G0.03	SITE PHOTOS	AE2.02	EXISTING ROOF PLAN
G0.04	SITE PHOTOS	AE5.01	EXISTING EXTERIOR ELEVATIONS
G0.05	SITE SURVEY	AE5.02	EXISTING EXTERIOR ELEVATIONS
G0.11	PROPOSED EXTERIOR MATERIALS	5	
G0.21	3D VIEWS - EXTERIOR		
G0.22	3D VIEWS - INTERIOR	05 ARCHI	ITECTURAL DEMO
G1.01	PLANNING ANALYSIS, AREA PLANS & SCHEDULES	D2.01	DEMO FLOOR PLANS
G1.11	MODIFICATION PLAN	D2.02	DEMO ROOF PLANS
G1.12	MODIFICATION WORKSHEET	D5.01	DEMO EXTERIOR ELEVATIONS
G1.13	MODIFICATION AXONS	3	
G2.01	BUILDING DEPARTMENT NOTES & SCHEDULES		
13		06 ARCHI	TECTURE
		A0.01	GENERAL NOTES
02 CIVIL		A1.01	SITE PLAN
C0.1	CIVIL COVER SHEET	A2.01	FLOOR PLANS - FIRST FLOOR
C1.1	EXISTING SITE & DEMOLITON	A2.02	FLOOR PLANS - SECOND FLOOR
C1.2	EXISTING TRIBUTARY AREAS	A2.03	FLOOR PLAN - ROOF
C1.3	GRADING AND DRAINAGE TRIBUTARY AREAS	A5.01	EXTERIOR ELEVATIONS
C1.4	OVERALL DRAINAGE AREA MAP	A5.02	EXTERIOR ELEVATIONS
C2.1	GRADING AND DRAINAGE PLAN	A7.01	BUILDING SECTIONS
C3.1	EROSION CONTROL PLAN	8	
C4.1	CONSTRUCTION DETAILS	40	
8			
03 LAND	SCAPE		
L1.0	SITE PLAN		
L1.1	MATERIALS LEGEND		
L2.0	PLANTING PLAN		
3			

	S	SOUTH
ICABLE	SCD	
NTRACT		SCHEDULE / SCHEDULING
	SD	STORM DRAIN
DUCTION	SECT	SECTION
ENT	SED	SEE ELECTRICAL DRAWINGS
CALE	SF	SQUARE FEET
	SFD	SEE FIRE PROTECTION
R		DRAWINGS
URNISHED,	SHT	SHEET
TOR INSTALLED	SIM	SIMILAR
URNISHED, OWNER	SLD	
	SMD	SEE MECHANICAL DRAWINGS
HAND	SOG	SLAB ON GRADE
	SPD	SEE PLUMBING DRAWINGS
	SPEC	SPECIFICATIONS
Y LINE	SQ	SQUARE
AMINATE	SS/SST	STAINLESS STEEL
	SSD	SEE STRUCTURAL DRAWINGS
)	STC	SOUND TRANSMISSION CLASS
	STD	STANDARD
	STL	STEEL
PER SQUARE FOOT	STRL	STRUCTURAL
PER SQUARE INCH	SUSP	SUSPENDED
E TREATED FIR	SYM	SYMETRICAL
N	SYST	SYSTEM
	T&B	TOP AND BOTTOM
N DIMENSION) /	T&G	TONGUE AND GROOVE
	T.O.	TOP OF
	T/TRD	TREAD
ED CEILING PLAN	ТВ	TOWEL BAR
AIN	TEMP	TEMPORARY
CE	THK	THICK
RATOR	TOB	TOP OF BEAM
{	TOC	TOP OF CONCRETE
)ED	TOS	TOP OF SLAB
)	TP	TOILET PAPER
	TYP	TYPICAL
PENING		
)	UON	UNLESS OTHERWISE NOTED
ER LEADER		
	V	VOLTAGE / VOLT
	VERT	VERTICAL
	VIF	VERIFY IN FIELD
	VPFAM	VAPOR PERMEABLE FLUID
		APPLIED MEMBRANE

SHEET INDEX

WEST / WIDTH / WIDE WITH WITHOUT WATER CLOSET WOOD WDW WINDOW WATER HEATER WATERPROOF(ING) WORKING POINT WEATHER RESISTIVE BARRIER WEIGHT BY

W

W/

W/O

WC

WD

WH

WP


WPT

WRB

WT

Х





181 SEACLIFF DRIVE

181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06

SANTA CRUZ COUNTY PERMIT: 211129

ADDITION AND ALTERATION TO SINGLE-FAMILY **RESIDENCE AND ADDITION** OF ACCESSORY DWELLING UNIT (ADU)

BILL AND ALYCIA KENNEDY


NOTICE

These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.

The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brough to the attention of Kerman Morris Architects prior to the commencemen of any work.


These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.

All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them



DATE	04/10/2020
SCALE	As indicated
DRAWN BY	DRN
CHECKED BY	СНК
JOB NO.	2002

G0.02

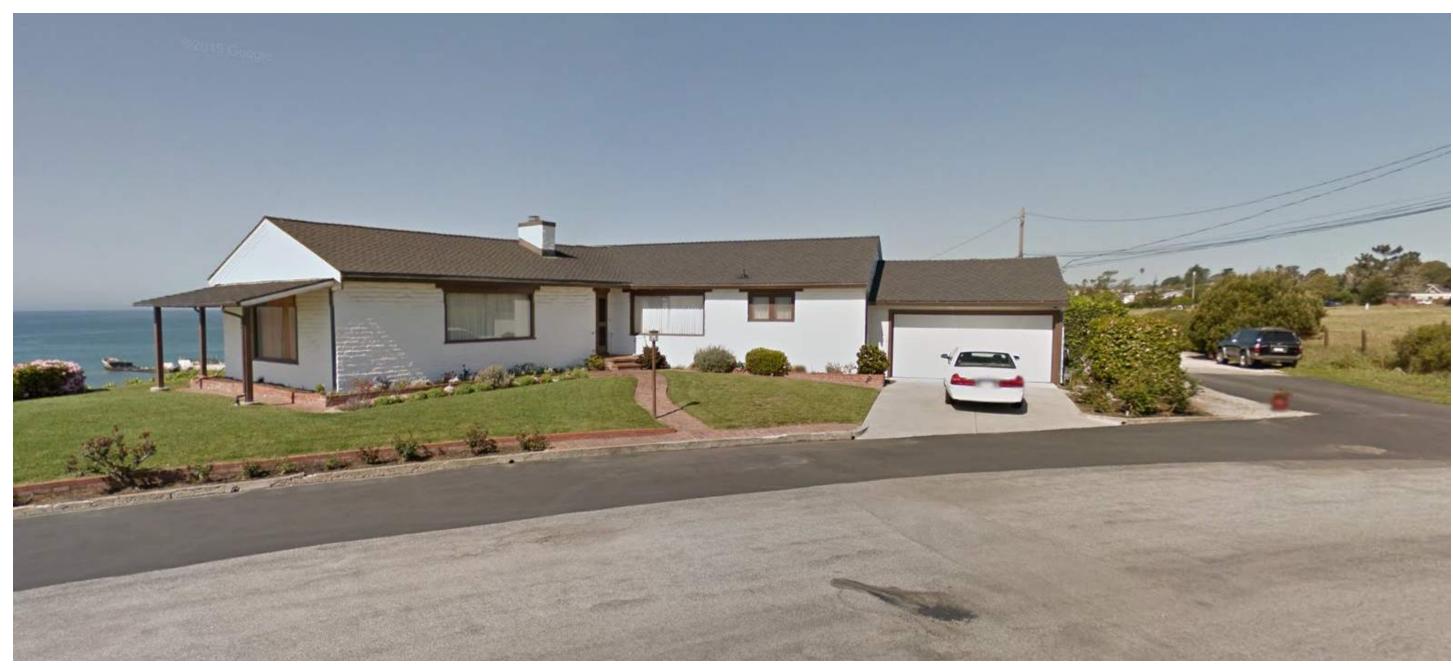


(E) FRONT ELEVATION OF 179 SEACLIFF (EAST NEIGHBOR)



(E) FRONT ELEVATION OF SUBJECT PROJECT & 183 SEACLIFF



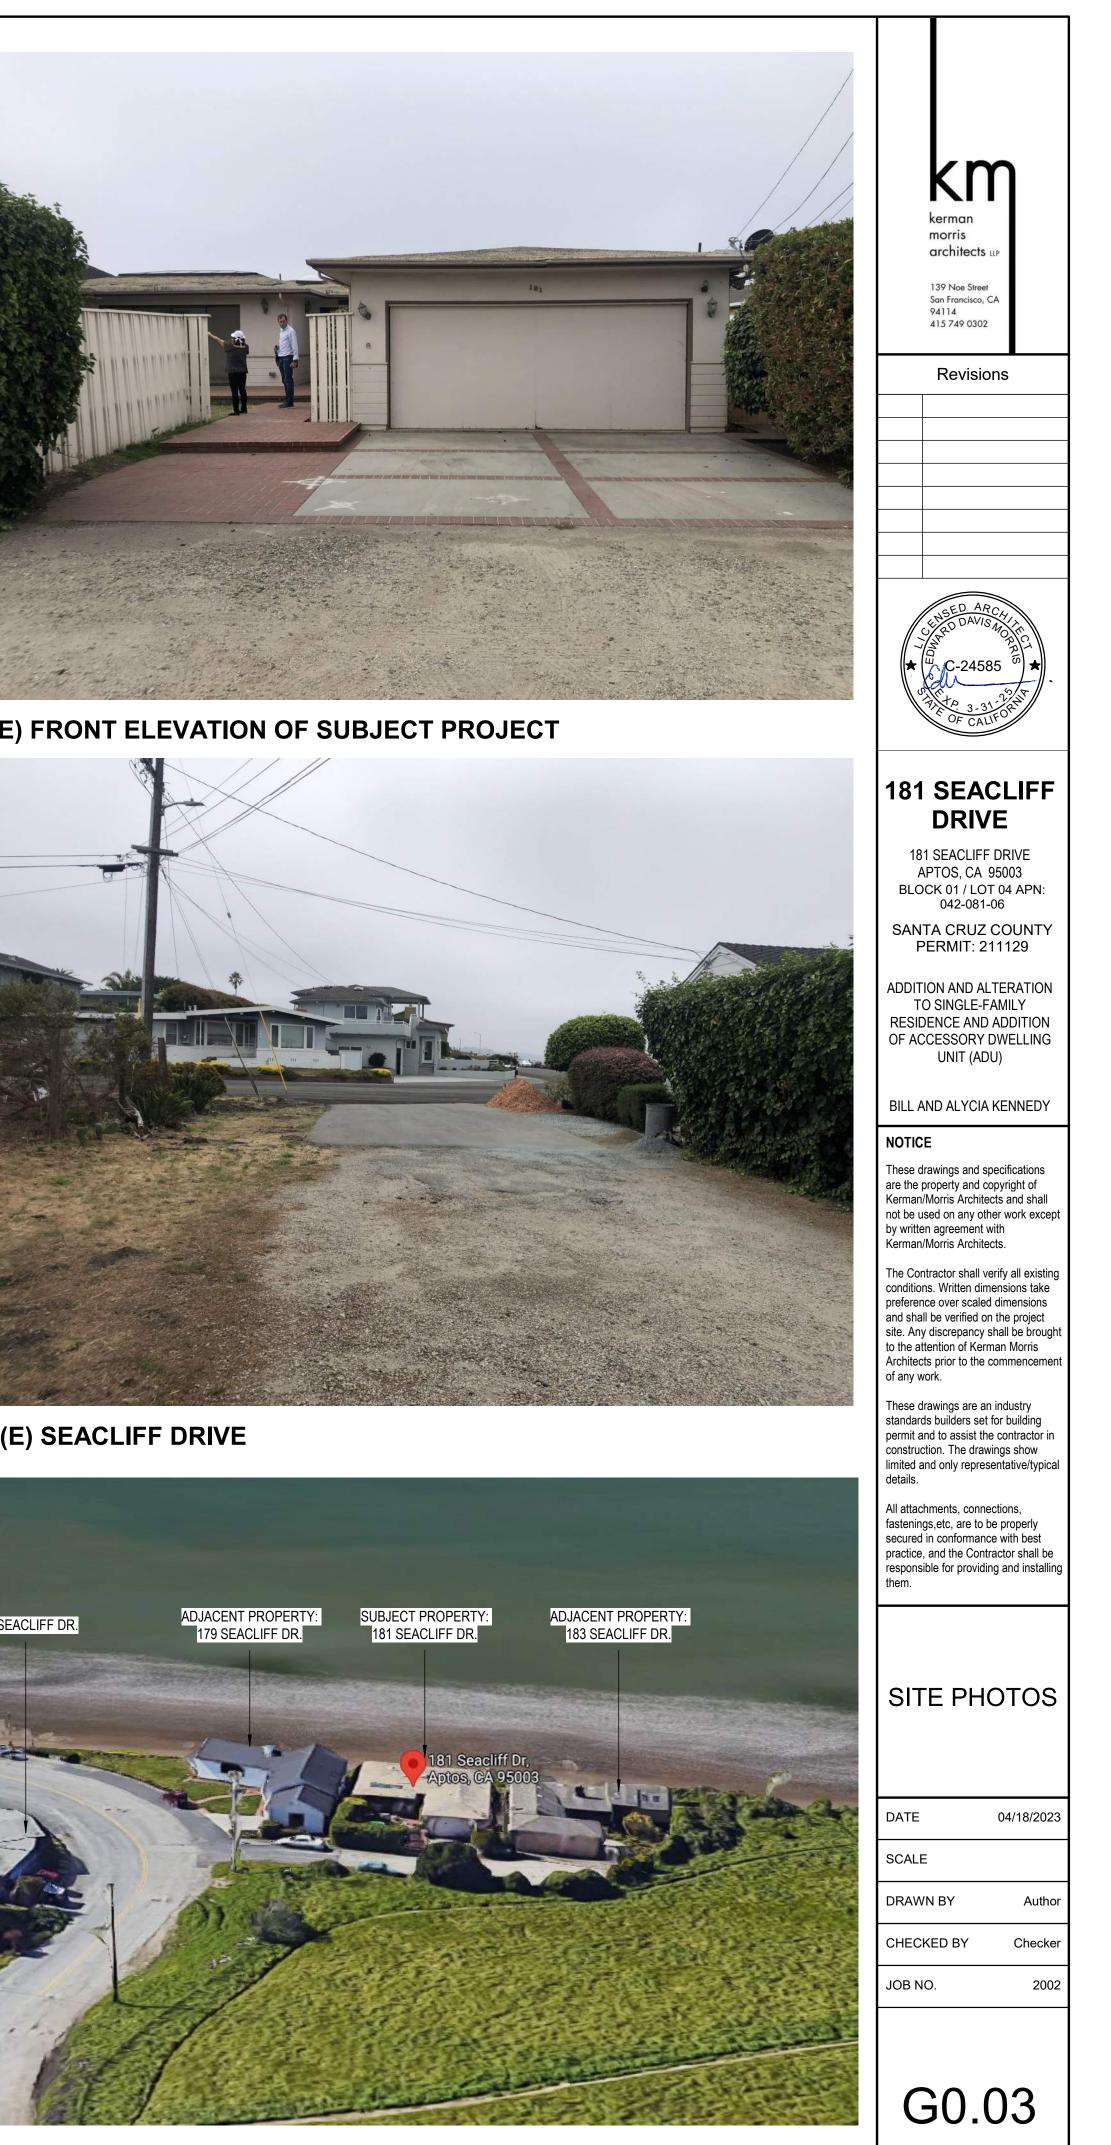



(E) FRONT ELEVATION OF 183 SEACLIFF (WEST NEIGHBOR)



AERIAL VIEW FROM NORTH







ADJACENT PROPERTY: 179 SEACLIFF DR



ADJACENT PROPERTY: 183 SEACLIFF DR & BEACH VIEW






ADJACENT PROPERTY: 183 SEACLIFF DR



kerman morris architects LLP

San Francisco, CA 94114 415 749 0302





181 SEACLIFF DRIVE

181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06

SANTA CRUZ COUNTY PERMIT: 211129

ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)

BILL AND ALYCIA KENNEDY

NOTICE

These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.

The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.

These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.

All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.


SITE PHOTOS


DATE 04/18/2023 SCALE CAUPY Author

CHECKED BY Checker

G0.04



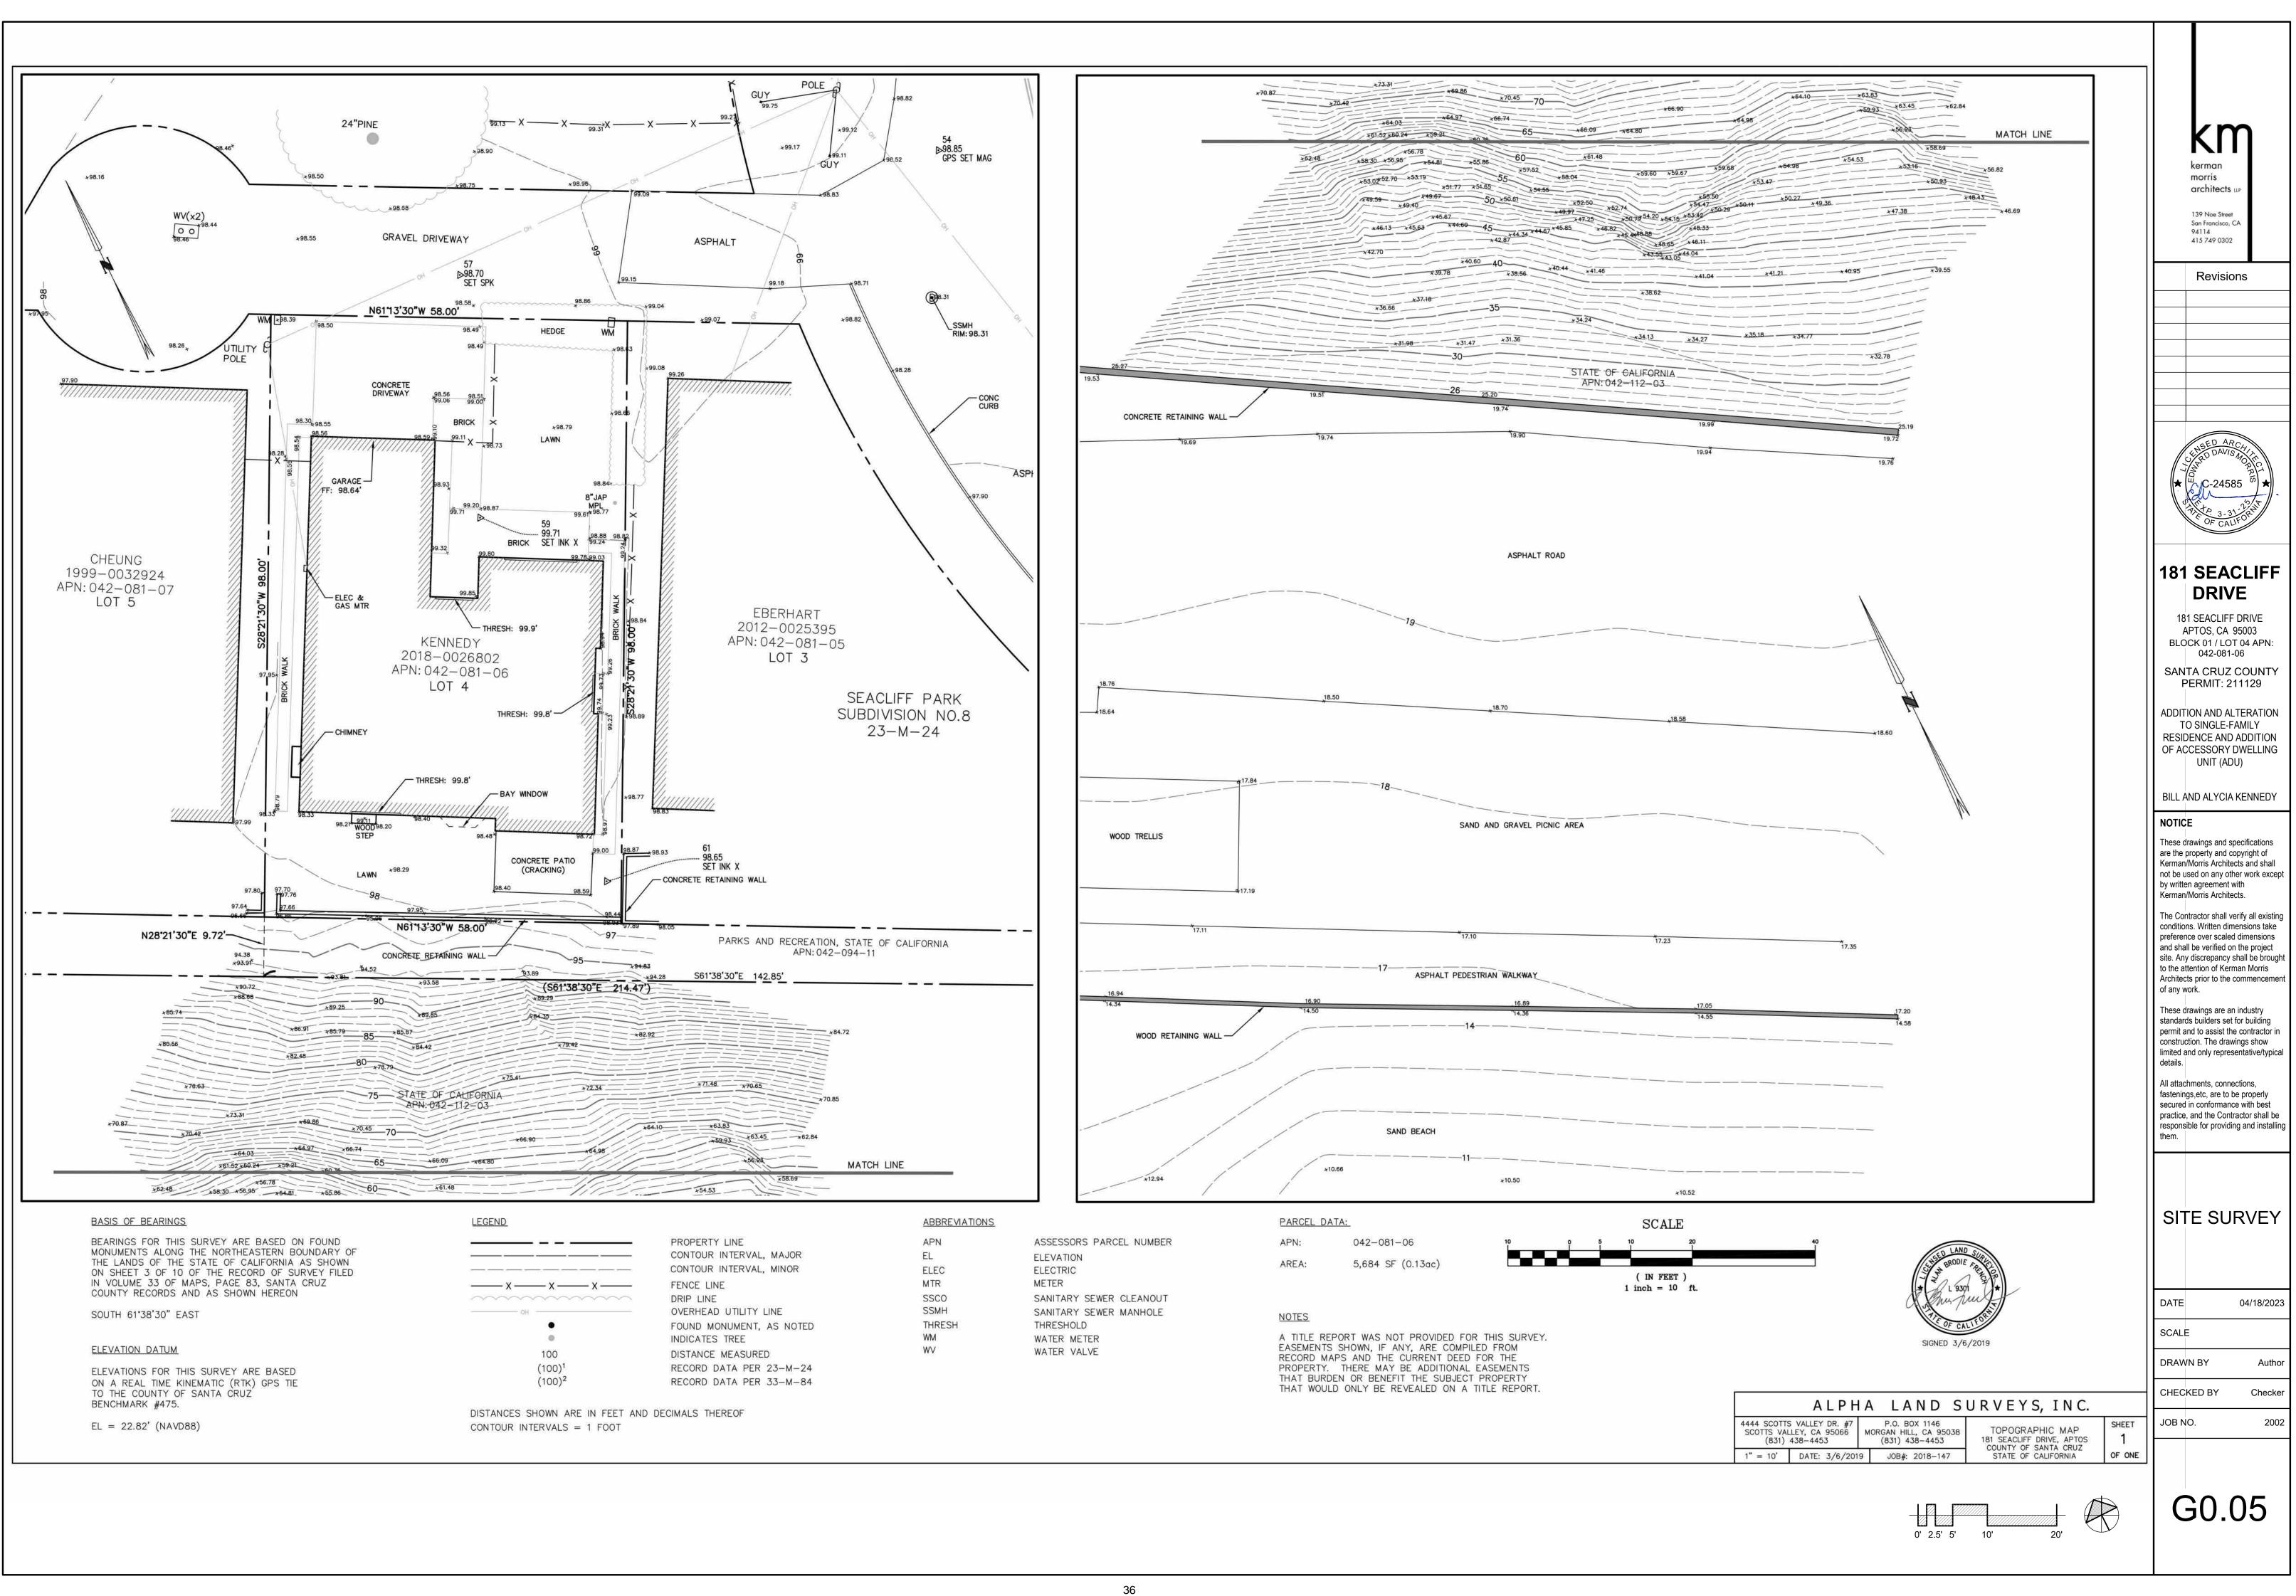

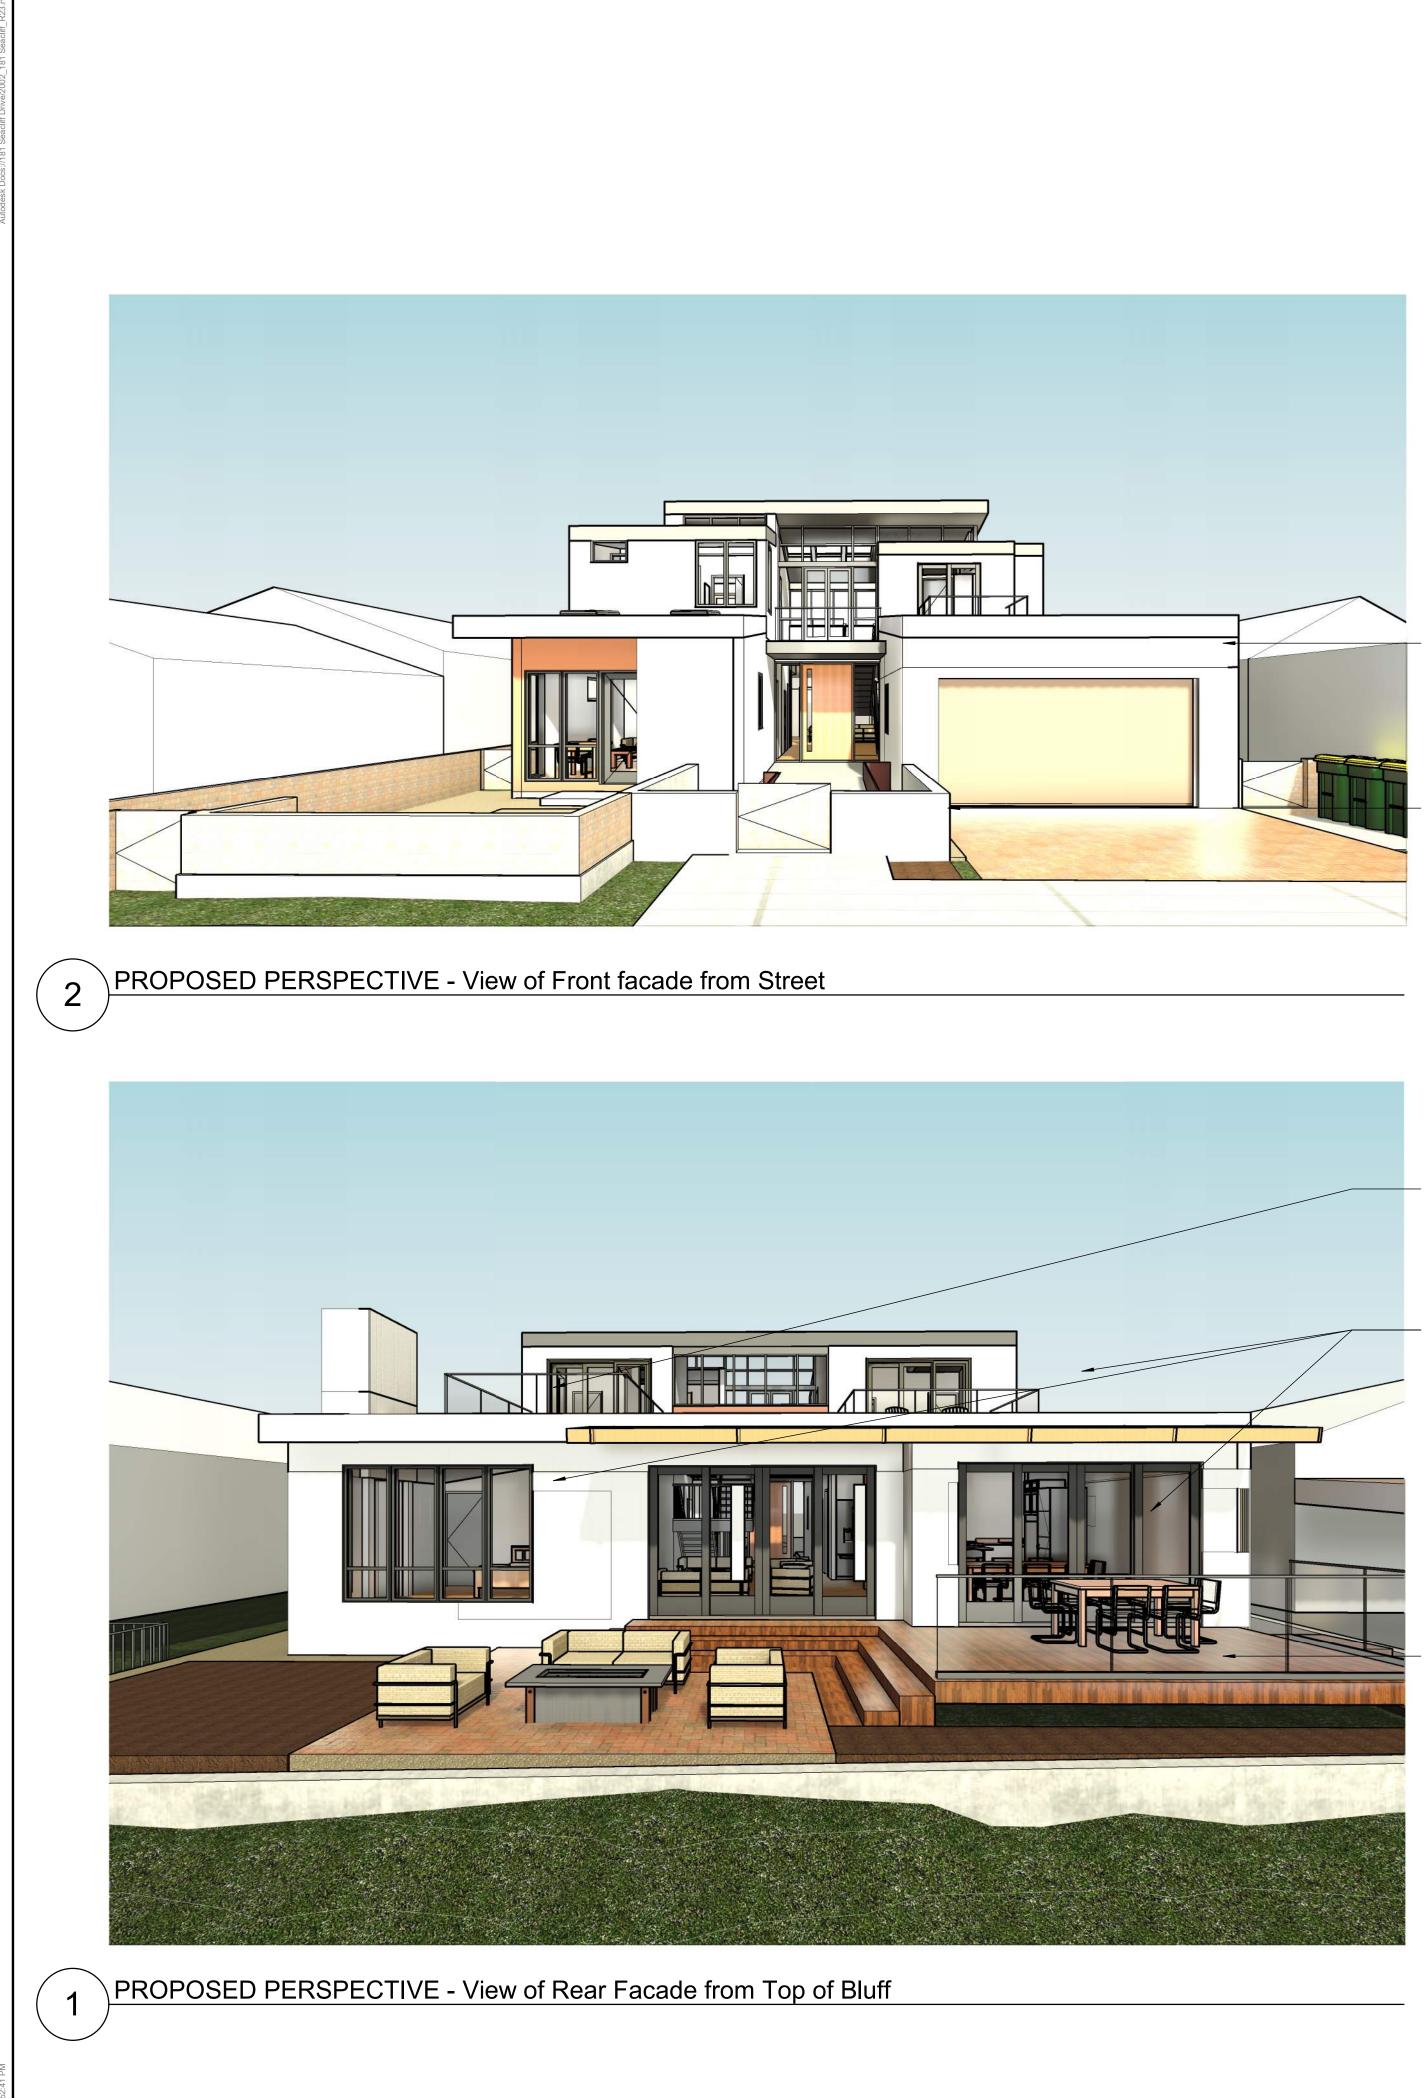

1. WALL CLADDING

CLADDING TYPE 1: VERTICAL 'V' GROOVE SIDING CEDAR WOOD SIDING, STAINED WHITE -OR-• FIBER CEMENT SIDING, PAINTED WHITE



2. (N) DECK

• 7/8" x 5 5/8" Kebony Clear* RAP decking: kebony.com

* Durable, low-maintenance wood material that can be used in marine environment. Produced from FSC certified Monterey Pine, "which has been treated with a bio-based liquid" that "alters the wood cell structure to give a unique wood product with outstanding durability and no maintenance needs beyond normal cleaning." (Product datasheet) "The Kebony technology gives the wood a deep rich brown color. After exposure to sun and rain the wood will

develop a natural silver gray patina." (Product datasheet)







- 1. OPTION A: VERTICAL SIDING
- PAINTED WHITE CEDAR WOOD SIDING OR FIBER CEMENT

OPTION B: STUCCO PAINTED WHITE (ACCENT COLOR MAY BE USED IN SOME LOCATIONS)

5. (N) 3'-0" HIGH WOOD FENCE

- 3. (N) 42" HIGH GLASS RAILINGS

4. (N) ALUMINUM THERMALLY-BROKEN WINDOWS AND SLIDING DOORS

- Windows to be horizontal sliding or fixed type to match existing
- •
- Narrow sightlines (2" wide frames or less) Thermally-broken frames w/ high-performing insulated glass (Cardinal 366 or equal with Argon)

2. (N) DECK

7/8" x 5 5/8" Kebony Clear* RAP decking: kebony.com


CLADDING TYPE 2: STUCCO PAINTED WHITE

(ACCENT COLOR, T.B.D, IN LOCATIONS AS SHOWN IN 3D VIEWS)



- 3. (N) 42" HIGH GLASS RAILINGS
- AGS STAINLESS, INC, GLACIER PANEL RAILING SYSTEMS OR APPROVED EQUAL: https://agsstainless.com/glacier-glass-panel-railing/



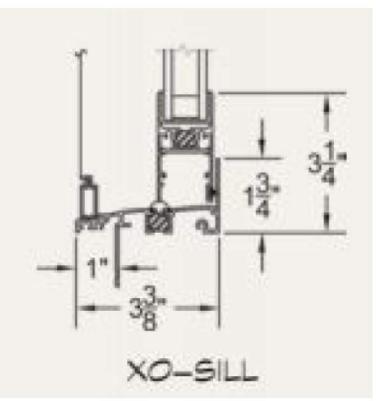


4. (N) ALUMINUM THERMALLY-BROKEN WINDOWS AND SLIDING DOORS

- Windows to be horizontal sliding or fixed type to match existing
- Narrow sightlines (2" wide frames or less)
 Thermally-broken frames w/ high-performing
- insulated glass (Cardinal 366 or equal with Argon)



139 Noe Street San Francisco, CA 94114 415 749 0302

Revisions

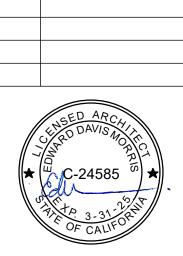

181 SEACLIFF DRIVE

181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06

SANTA CRUZ COUNTY PERMIT: 211129

ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)

BILL AND ALYCIA KENNEDY

NOTICE

These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.

The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.

These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.

All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.


PROPOSED EXTERIOR MATERIALS


DATE	04/18/2023
SCALE	
DRAWN BY	Author
CHECKED BY	Checker
JOB NO.	2002

G0.11





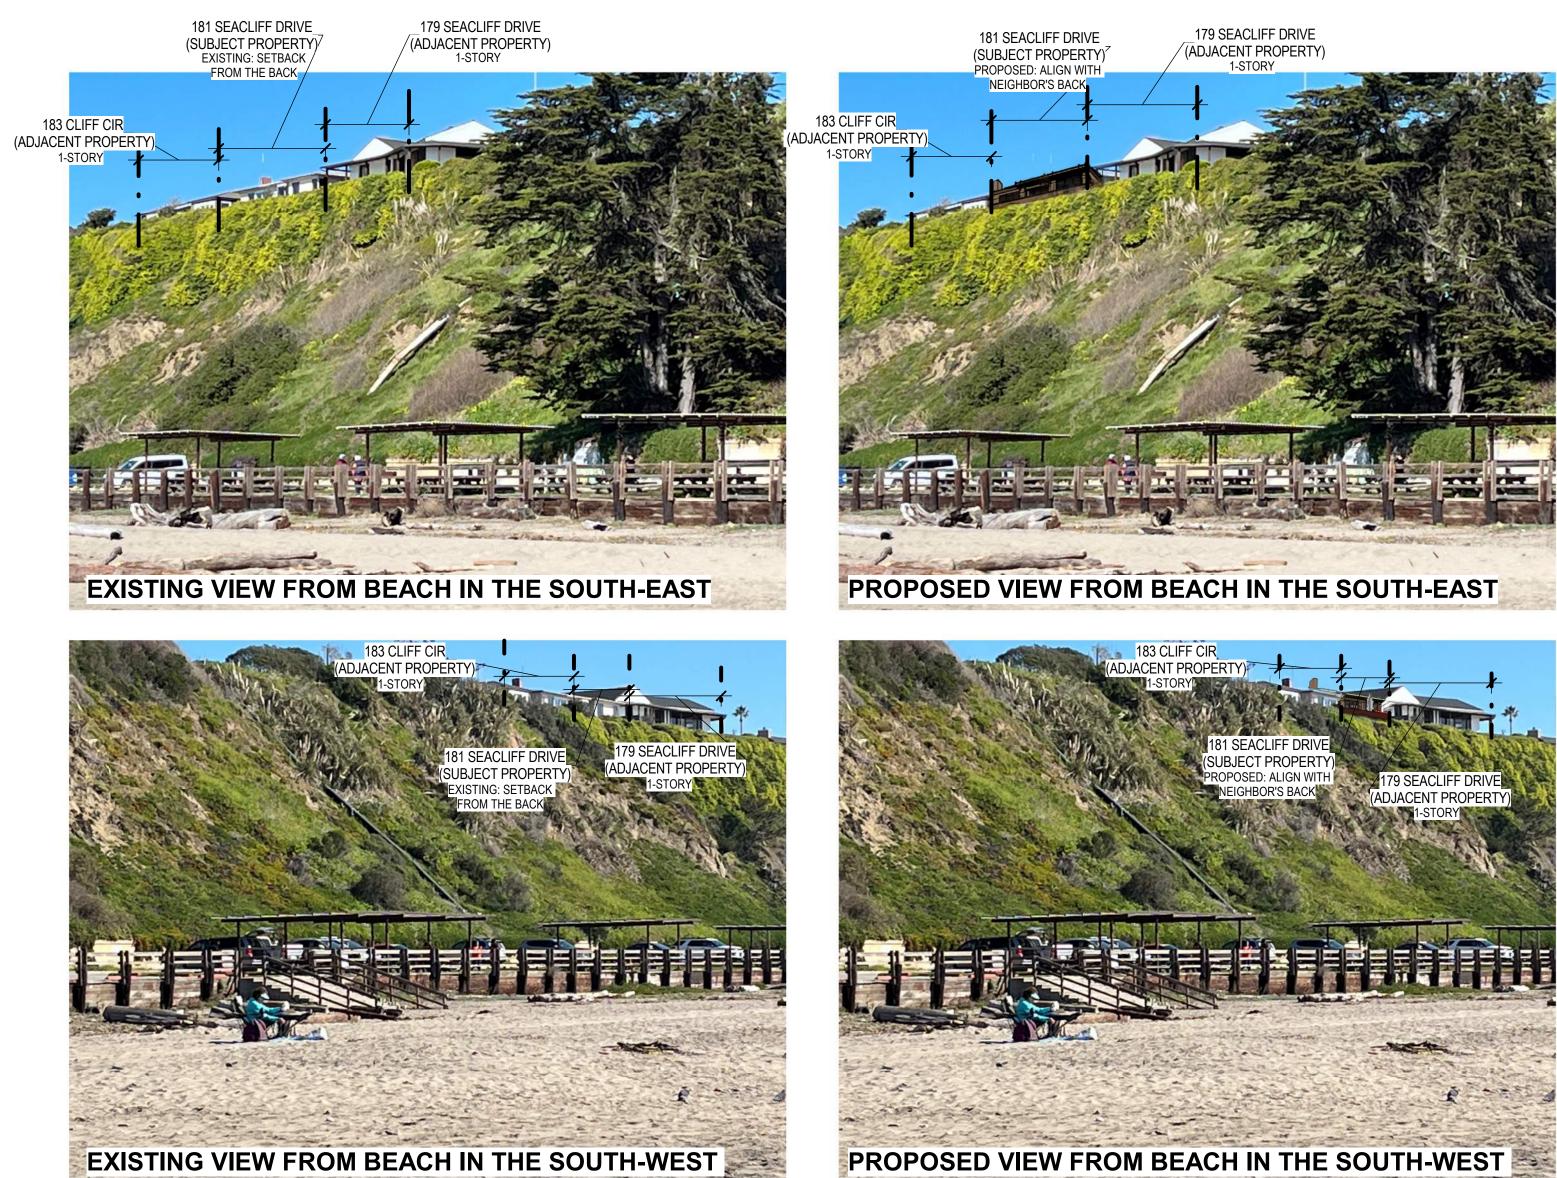

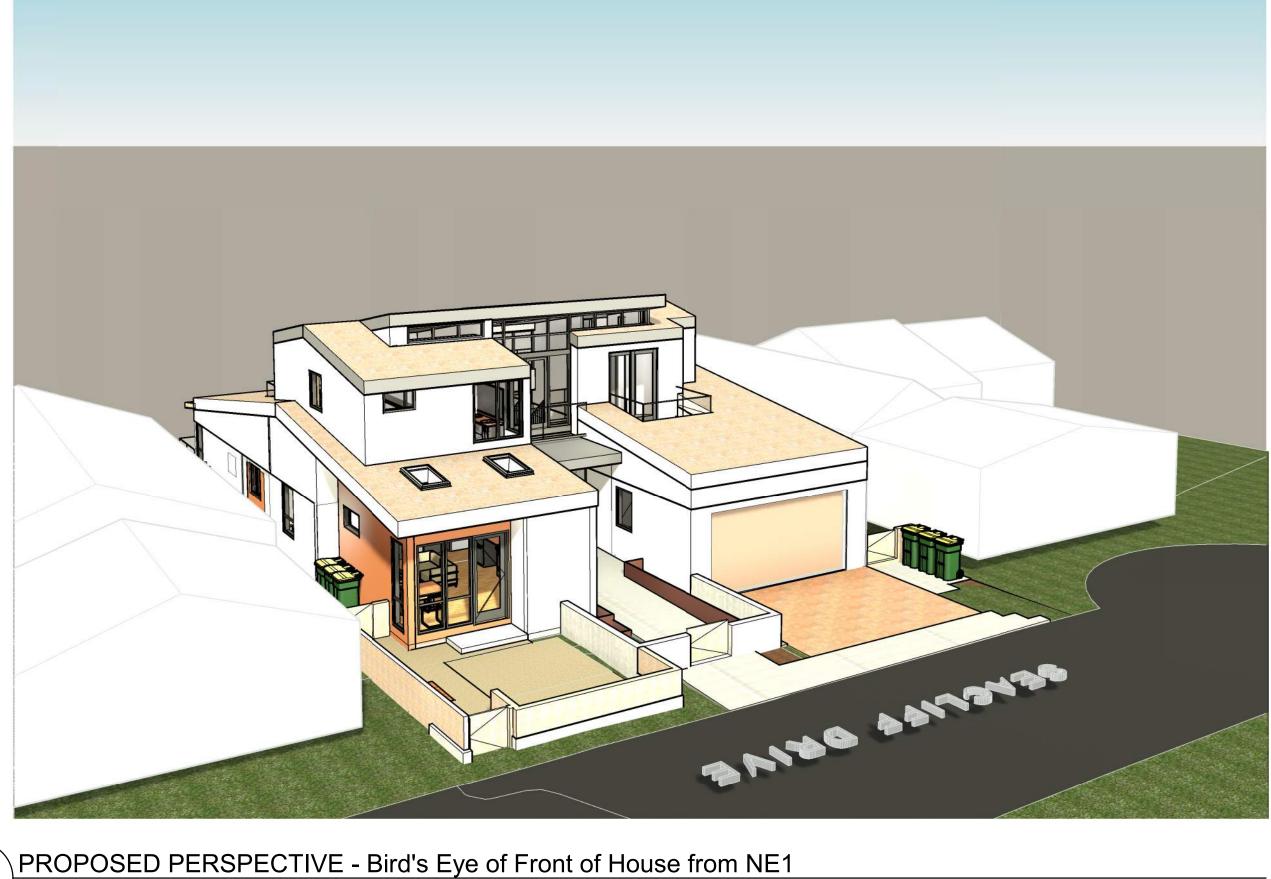



PROPOSED PERSPECTIVE - Birds Eye of Back of House from SE1

2

kerman morris architects LLP 139 Noe Street San Francisco, CA 94114 415 749 0302
Revisions

181 SEACLIFF DRIVE

181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06

SANTA CRUZ COUNTY PERMIT: 211129

ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)

BILL AND ALYCIA KENNEDY

NOTICE

These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.

The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commenceme of any work.

These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.


All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing

3D VIEWS -EXTERIOR

DATE	04/18/2023
SCALE	
DRAWN BY	Author
CHECKED BY	Checker
JOB NO.	2002

G0.21



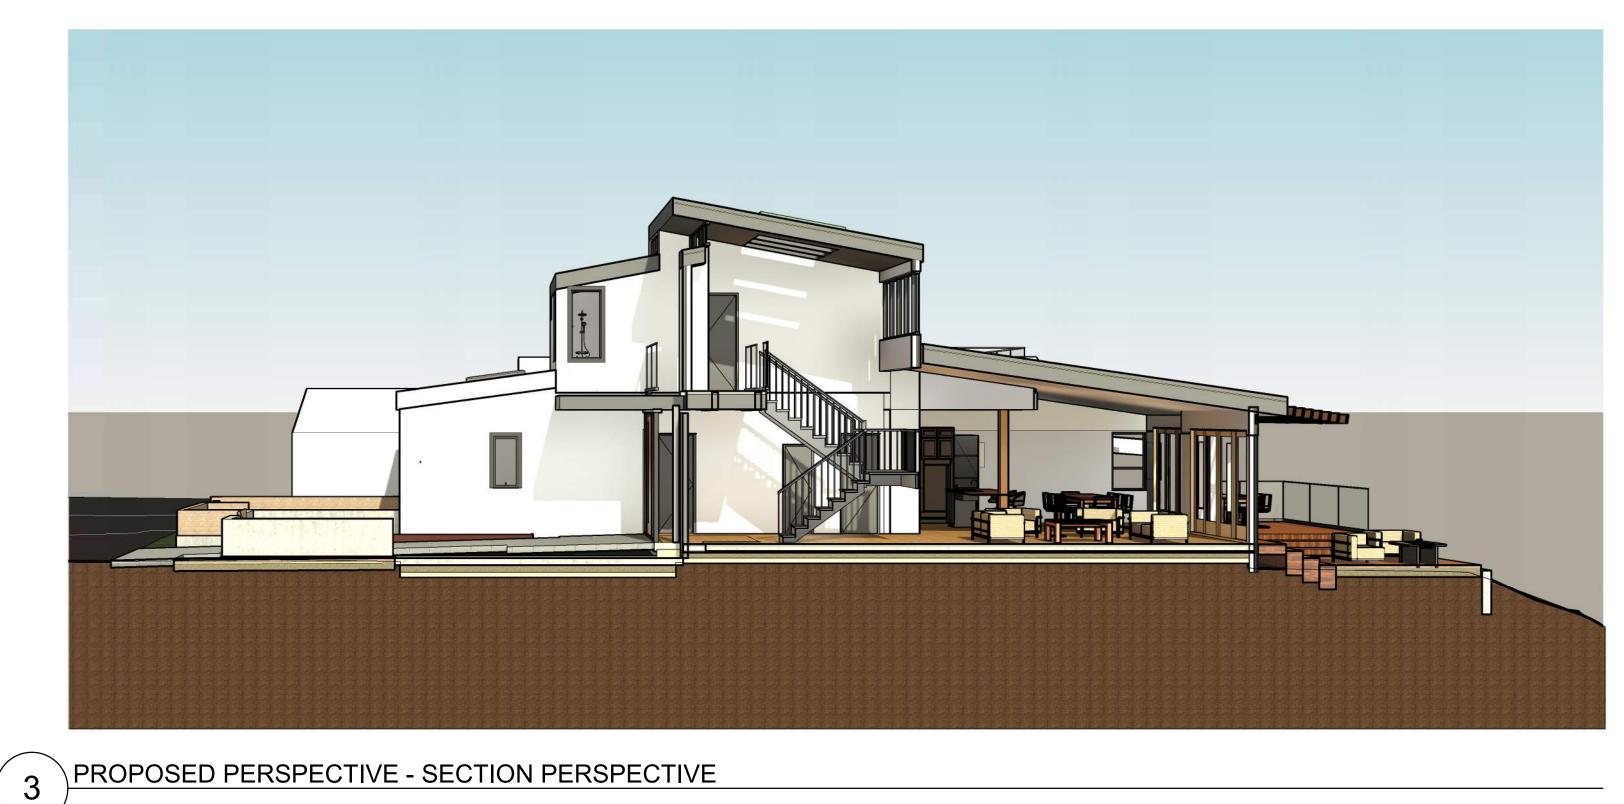



	1
kerman morris architects LLP 139 Noe Street San Francisco, CA 94114 415 749 0302	
Revisions	
C-24585 CLUSED ARCH CLUSED DAVIS MO RDC1 ★ C-24585 C-2458	
181 SEACLIFF	
DRIVE 181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06 SANTA CRUZ COUNTY	
PERMIT: 211129	
ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)	
BILL AND ALYCIA KENNEDY	
NOTICE These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects. The Contractor shall verify all existing	
conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work. These drawings are an industry	
standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.	
All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.	
3D VIEWS - INTERIOR	
DATE 04/18/2023	
SCALE	
DRAWN BY Author	
CHECKED BY Checker	
JOB NO. 2002	
2002	
G0.22	
	i i

					l	
					_	40'-0"
					י 	(100 YEAR GEOLOGICAL SETBACK)
					l	
Area S	Scheo	dule (Gros	s Build	ling - Exis	ting)	
		Counts in FAR	Allowed		Qualifying	
Category	Area	and Lot Coverage	Deduction	Area Type	Area	
FIRST FLOOR						
	462 SF	Yes	225 SF	Gross Building Area	237 SF	
INTERIOR AREA	1931 SF 2393 SF	Yes	0 SF	Gross Building Area	1931 SF 2168 SF	
						(E) BU
						$($ \mathbf{a} $AREA PLAN - EXISTIN$
						(3) AREA FLAN - EXISTIN
HABITAE	BLE S	PACE ARI	EA BRE		N	Area Schedule (Gr
		D AREA, EXCLUDING				FLOOR
= : : = : = : = : = : = : = : = : = : =	,	-,	,	-, = - - -,		

HABITABLE SPACE AREA BREAKDOWN						
BY FLOOR (ENCLOSED AREA, EXCLUDING GARAGES, SHAFTS, ETC.)						
LEVEL EXISTING ADDITIONAL TOTAL						
FIRST FLOOR	1931 SF	306 SF	2237 SF			
SECOND FLOOR	0 SF	653 SF	653 SF			
	1931 SF	959 SF	2890 SF			

959 SF / 1,931 SF = 49.66%

	HA	CHIMNEY		
		GARAGE / UNCONDITIONED AREA		
				ADU UNCOVERED PATIO
				COVERED EAVE
CDUGG			REAKDOWN	DECK (UNCOVERED) > 18" ABOVE GRADE
GRUSS	DUILDIIN	8		
	BY FLOOR	(ENCLOSED AREA)	*	
LEVEL	EXISTING	ADDITIONAL	TOTAL	SECOND FLOOR
	2,401110	7.88811101012	101742	2ND FLOOR AREA
				DOUBLE-HEIGHT >/=16'
FIRST FLOOR	2393 SF	306 SF	2699 SF	2ND FLOOR UNCOVERED DECK
	0.00	652 05	652 05	5

LEVEL	EXISTING	ADDITIONAL	TOTAL	
FIRST FLOOR	2393 SF	306 SF	2699 SF	
SECOND FLOOR	0 SF	653 SF	653 SF	
	2393 SF	959 SF	3352 SF	
			40.000/	


959 SF / 2,393 SF = 40.08% GROSS AREA INCREASE

PLANNING CODE ANALYSIS

ADDRESS : 181 SEACLIFF DRIVE, A	APTOS, CA 95003		ORIGINAL FILING :	
APN : 04208106	·		HISTORIC STANDING : "B" – Unknown / /	Age Eligible
Торіс	Code Section	Required / Allowed	Existing	
ZONE/MAP	MAP 042	SU (SPECIAL USE)		
ZONING / GENERAL PLAN DESIGNATION	MAP 042	R-UL (URBAN LOW-DENSITY RESIDENTIAL)	RESIDENTIAL	RESIDENTI
ASSESSOR'S USE / CLASS		020-SINGLE RESIDENCE AND ADU ALLOWED	SINGLE-FAMILY RESIDENCE	SINGLE-FAI
COASTAL ZONE	MAP 042	YES		
FLOOD ZONE	N/A	N/A		
IMPROVEMENTS TO EXISTING SINGLE-FAMILY RESIDENCES EXEMPTION	SCCO 13.20.061	REMODELS, ALTERATIONS, AND ADDITIONS		ADDITION A ACCESSOR
WILDLAND URBAN FIRE HAZARD AREA	MAP 042	N/A - NOT IN WILDLAND URBAN INTERFACE AREA	N/A	N/A
F.A.R	Table SCCO 13.10.323(B)	52% MAX (50% PER SCCO 13.10.323 PLUS 2% ADU BONUS)	2,168 GSF / 5,684 SF LOT SIZE = 38.1% OR 0.386 F.A.R.	2,660 GSF /
PARCEL COVERAGE	Table SCCO 13.10.323(B)	42% MAX (40% PER SCCO 13.10.323 PLUS 2% ADU BONUS)	2,393 GSF / 5,684 SF LOT SIZE = 42.1% LOT COVERAGE (EXISTING, NON-CONFORMING)	2,380 SF 1S
HEIGHT / STORIES	Table SCCO 13.10.323(B)	R-1: 28; MAXIMUM HEIGHT / MAX 2-STORIES	14'-11", 1-STORY	24'-10", 2-ST
SETBACK - FRONT	Table SCCO 13.10.323(B)	20' MIN.	19'-4" AT (E) NON-COMFORMING SETBACK AT GARAGE	19'-4" AT EX
SETBACK - SIDE 1	Table SCCO 13.10.323(B)	8' MIN.	5'-1" AT (E) NON-CONFORMING SETBACK AT WEST SIDE YARD	5'-1" AT WES AT NEW 2NI
SETBACK - SIDE 2	Table SCCO 13.10.323(B)	5' MIN.(4' MIN. OKAY AT ADU PORTION)	4'-9 3/4" (E) NON-CONFORMING SETBACK AT EAST SIDE YARD	4'-9 3/4" AT (MAIN HOUS 2ND FLOOR
SETBACK - REAR	Table SCCO 13.10.323(B)	15' MIN.	14'-3" (E) NON-CONFORMING SETBACK AT REAR/SOUTH FACADE	14'-3" AT (E) AT NEW 2N YARD PER
SETBACK - REAR (PER GEO-TECH/-LOGICAL REPORT)	GEOTECH / GEOLOGICAL REPORT BY CMAG DATED 1/5/2021	40' MIN. (100 YEAR SETBACK) REQUIRED AT NEW CONSTRUCTION	14'-3" (E) NON-CONFORMING SETBACK AT REAR/SOUTH FACADE	14'-3" AT (E) AT NEW 2NI
SETBACK - ALLOWED OBSTRUCTIONS	SCCO 13.10.323(E)	EAVES, CHIMNEYS, UNCOVERED, UNENCLOSED DECKS/PORCHES = 6' MIN AT REAR, 3' AT SIDE.; DECKS <18" + TO PROPERTY LINE; ADU ENCROACHMENTS = 2' MIN.	(E) CHIMNEY AT WEST SIDE YARD	(E) CHIMNE EAVES <2'; YARD
INCREASE IN HABITABLE SPACE LIMITATION	SCCO 16.10.040(19)	50% MAX. INCREASE IN HABITABLE SPACE TO NOT BE CONSIDERED A "DEVELOPMENT"	1,931 SF (E) HABITABLE SPACE	2,890 SF HA SF MAX. ALI

Alea Ochedule (
			FLC			
Name	Area**	Area Type	Counts in FAR			
FIRST FLOOR						
1ST FLOOR - MAIN HOUSE	1691 SF	Gross Building Area	Yes			
ADU	546 SF	Gross Building Area	Yes			
CHIMNEY	14 SF	Gross Building Area	No			
GARAGE / UNCONDITIONED AREA	481 SF	Gross Building Area	Yes			
ADU UNCOVERED PATIO	237 SF	Exterior Area	No			
COVERED EAVE	56 SF	Exterior Area	Yes			
DECK (UNCOVERED) > 18" ABOVE GRADE	195 SF	Exterior Area	No			
8	3219 SF					


SECOND FLOOR			
2ND FLOOR AREA	653 SF	Gross Building Area	Yes
DOUBLE-HEIGHT >/=16'	70 SF	Gross Building Area	Yes
2ND FLOOR UNCOVERED DECK	372 SF	Exterior Area	No
5	1095 SF		
GRAND TOTAL: 13	4314 SF	FLOO	R AREA R [52% OF

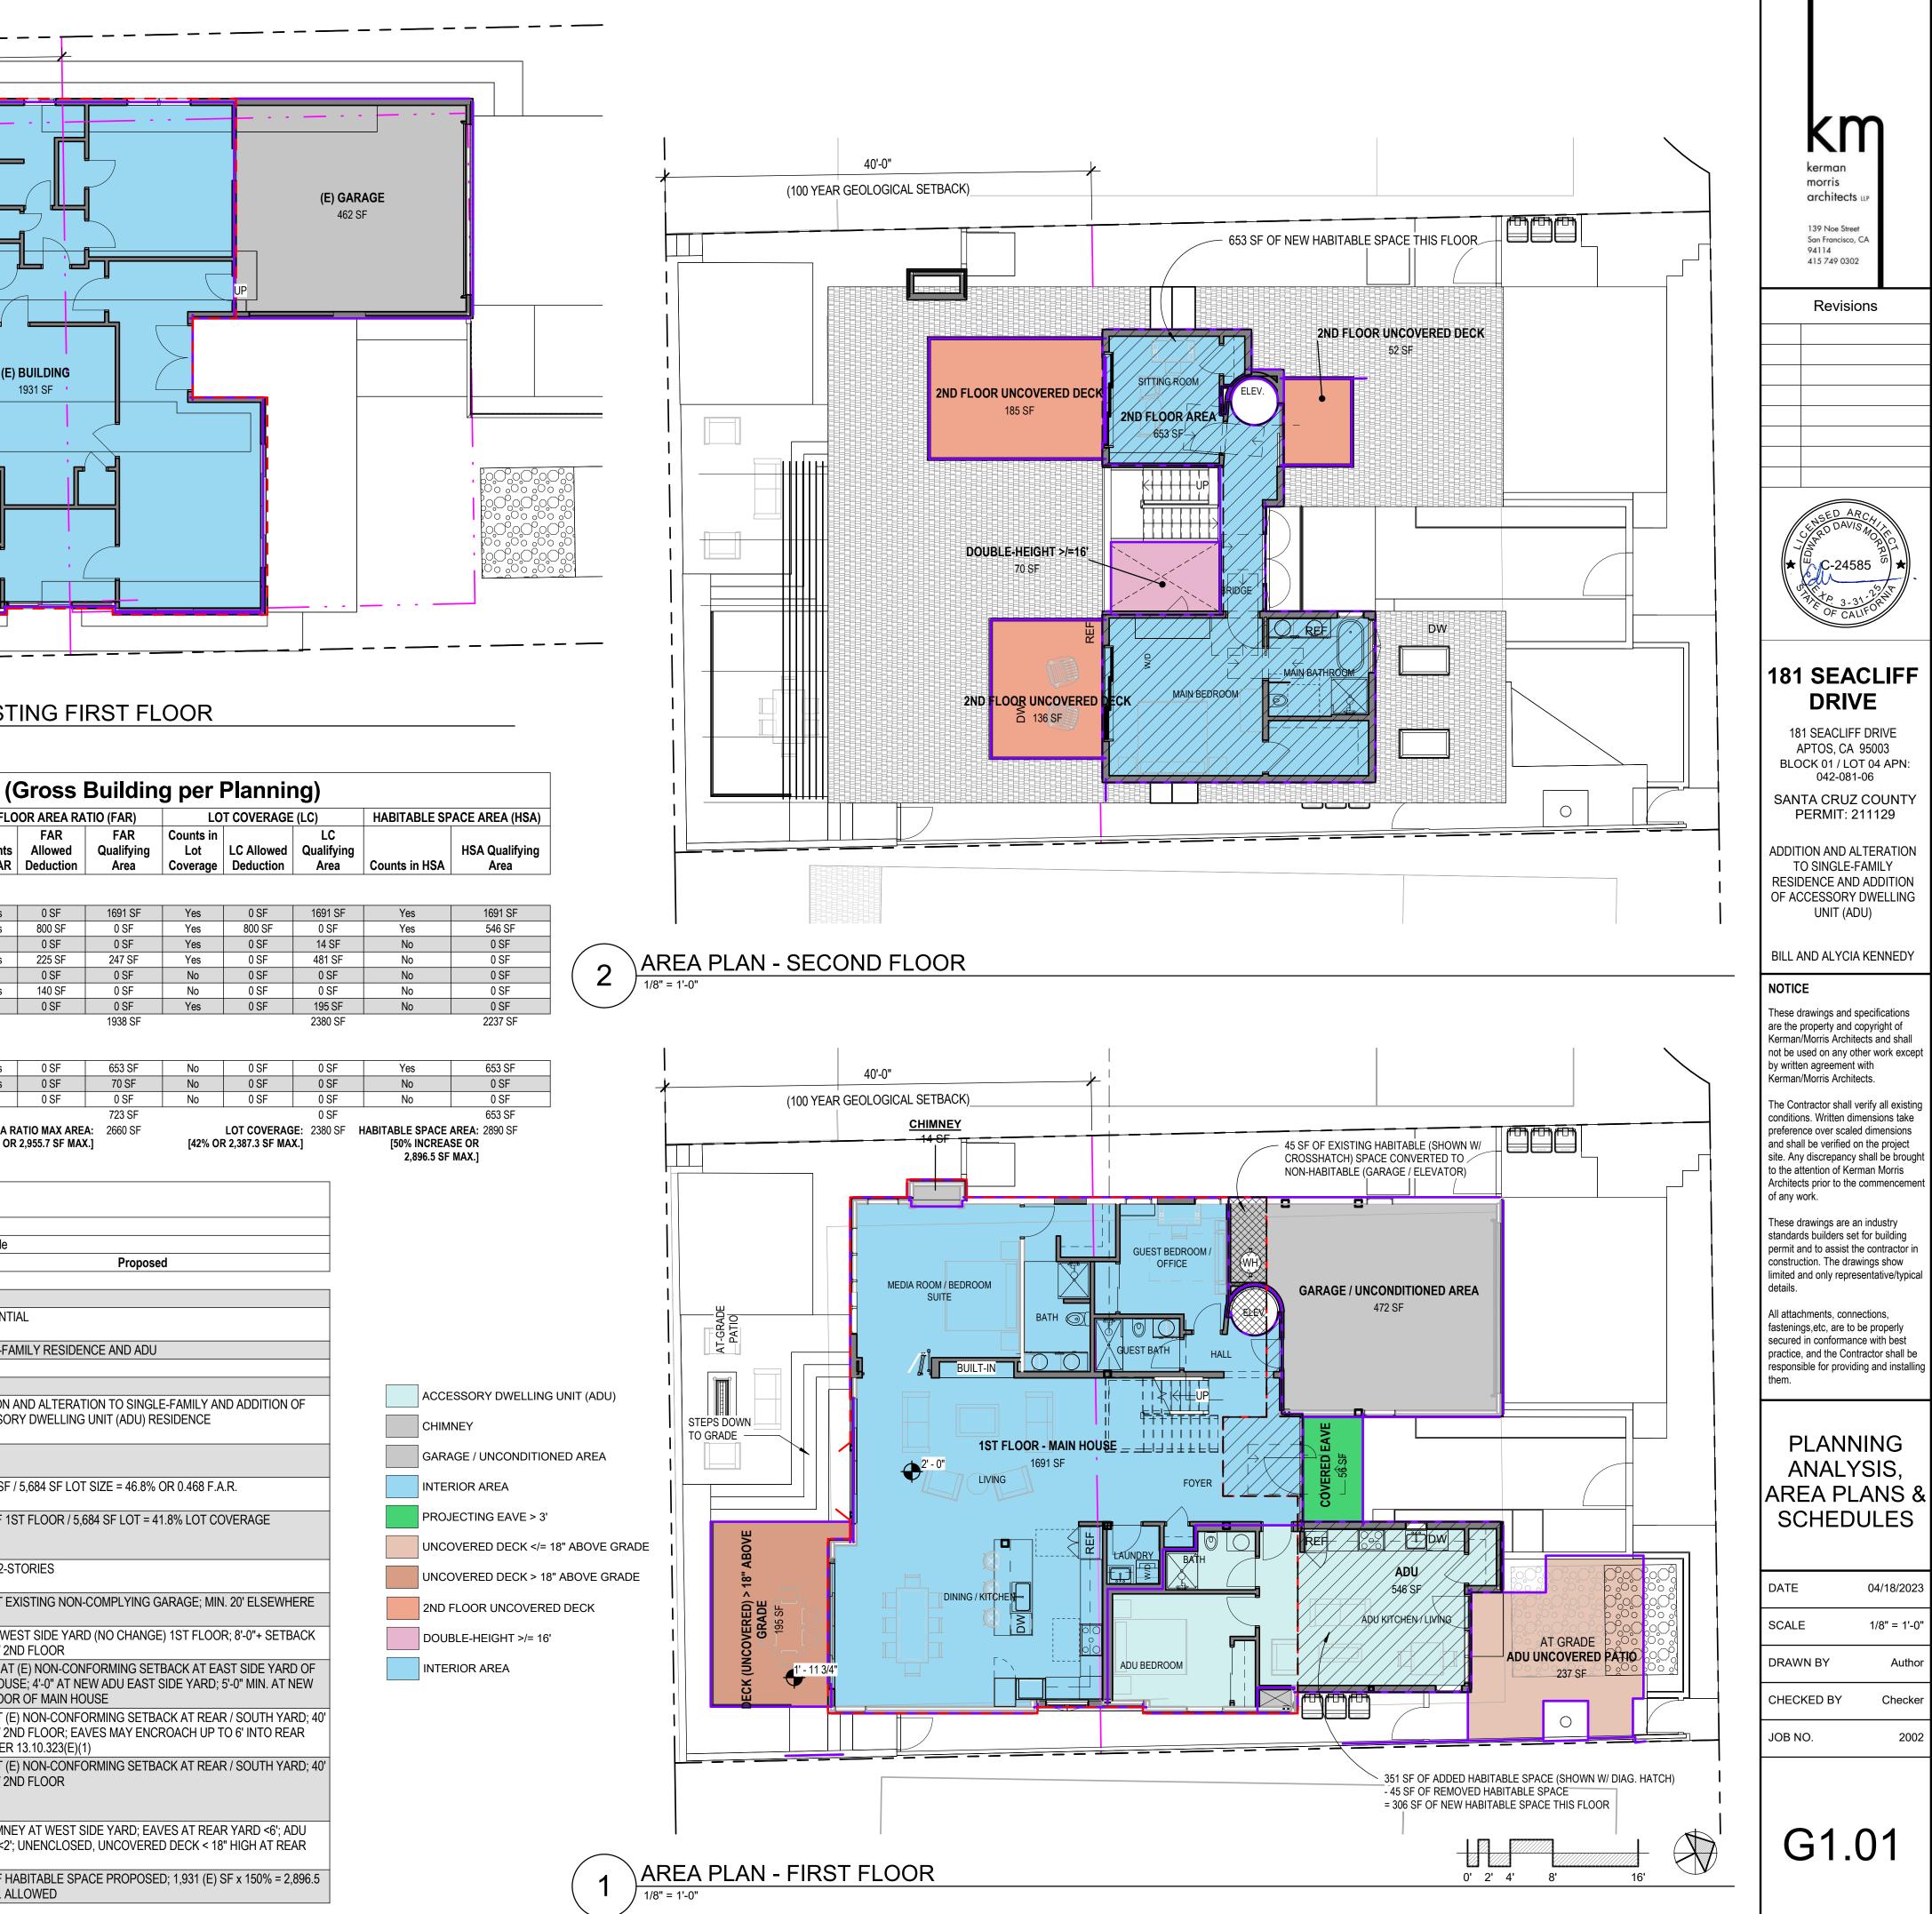




MODIFICATION PLANS LEGEND

	2		ELEI MAJ			-		
			elei <u>Not</u>			-		
			WAL	L T	0 B	ER	ET	AINE
			FOU	NDA	ATIO	ON .	го	BE I
			FLO	OR /	RC	OOF	тс) BE
MOD	FICAT	ION	PLA	<u>N:</u>				
•	EXIST 1.	-	FOL DIFI(-		
•	T. EXIST							
	1.	-	REQ	-	-	-		-
•	EXIST	ING	EXT	ERI	OR	WA	LLS	5 - ~
	1.		ERI					
			ICAT			-		-
	2.		STIN					
		А.		EPL	-			
		-	-	PEN			-	-
		B.	``	E) HE				

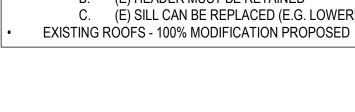

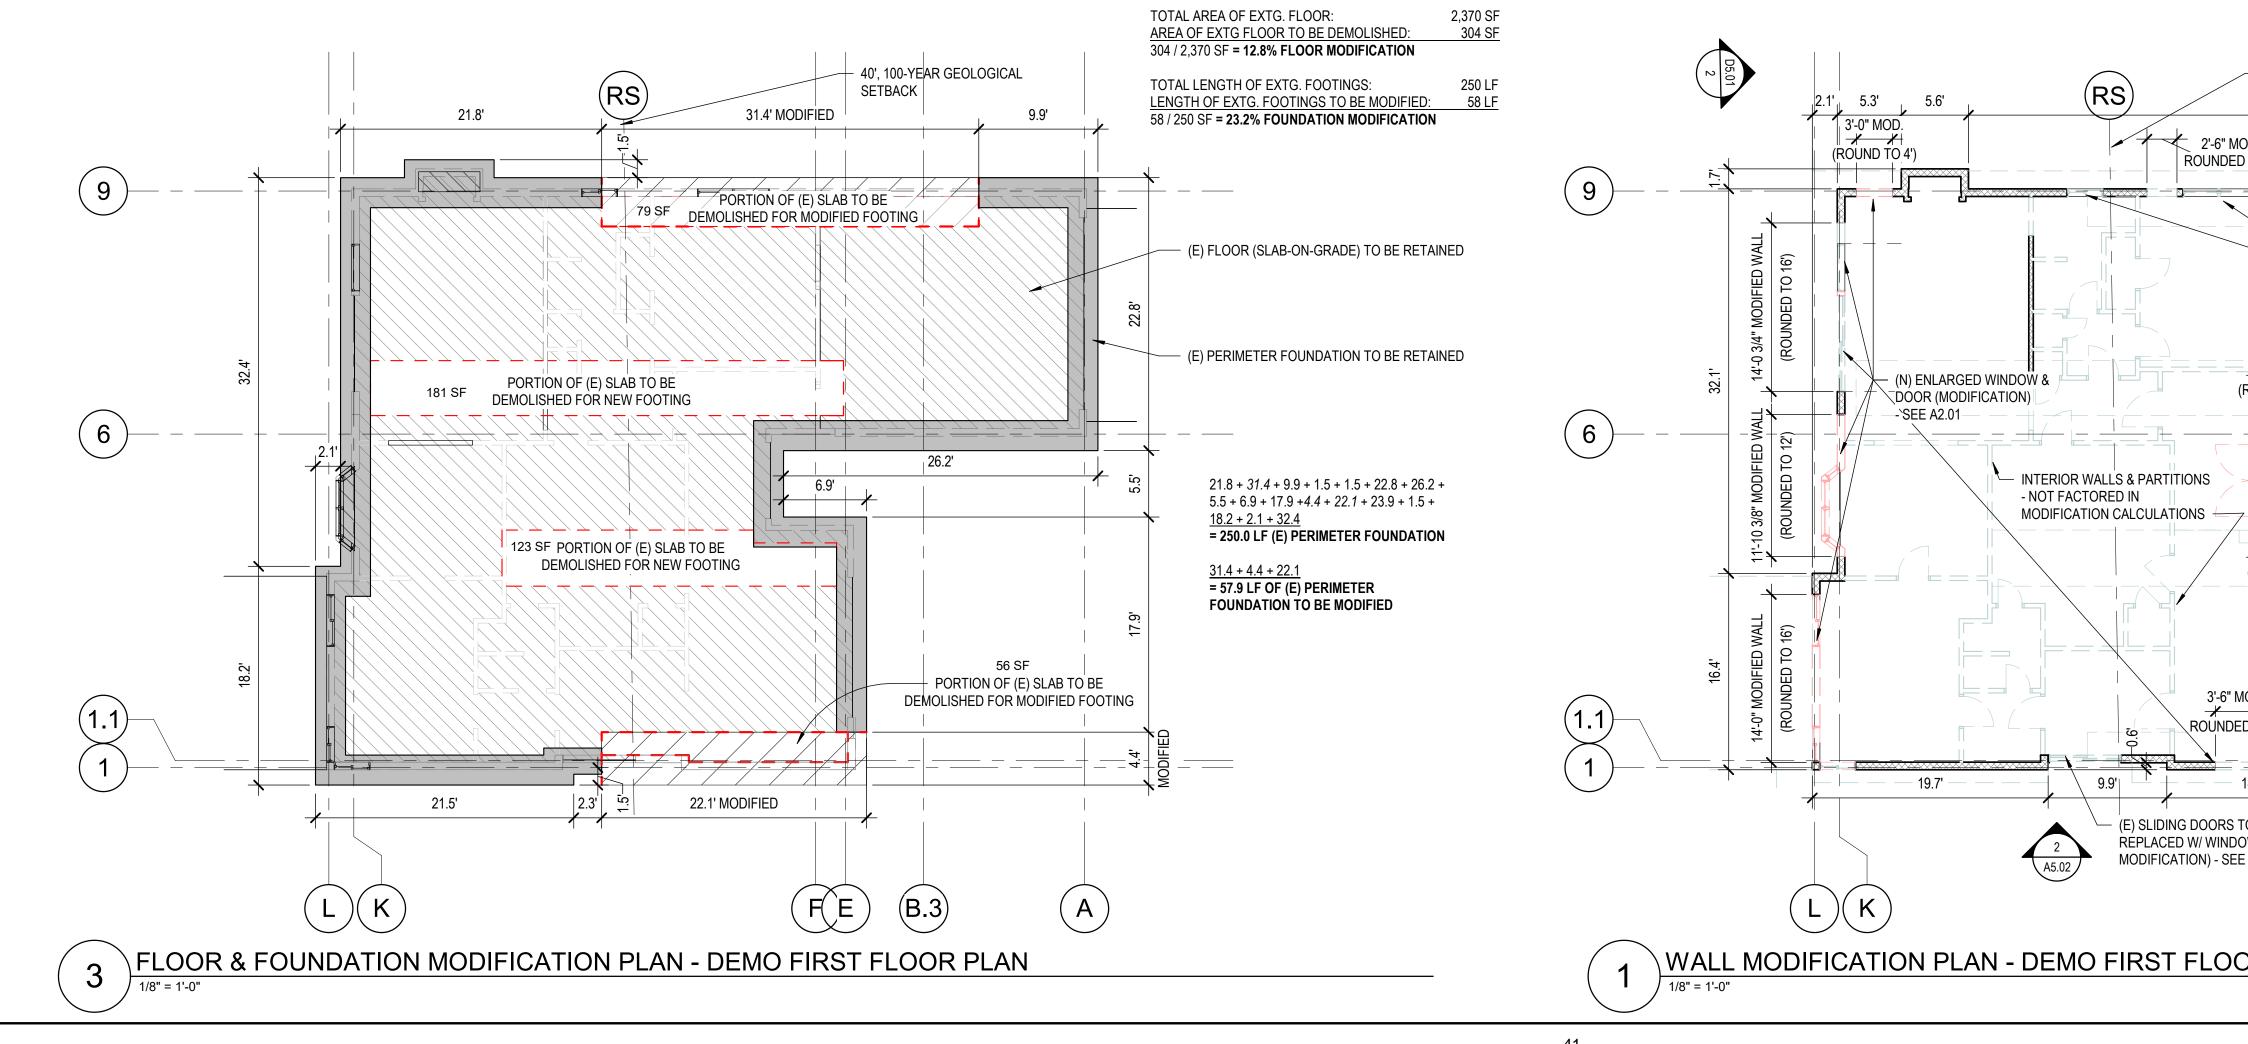

MOVED / DEMOLISHED L COMPONENT


MOVED / DEMOLISHED TURAL COMPONENT


IED

RETAINED

E RETAINED

% MODIFICATION PROPOSED UIRED TO SUPPORT 2ND FLOOR DIFICATION PROPOSED NEW INTERIOR FOOTINGS ~40.9% MODIFICATION PROPOSED RETAINED OR MODIFIED AS TION PLAN THIS PAGE D DOORS TO BE REPLACED NDOWS AND DOORS IN EXISTING T COUNT AS MODIFICATIONS BE RETAINED C. (E) SILL CAN BE REPLACED (E.G. LOWERED W/ NEW SILL)

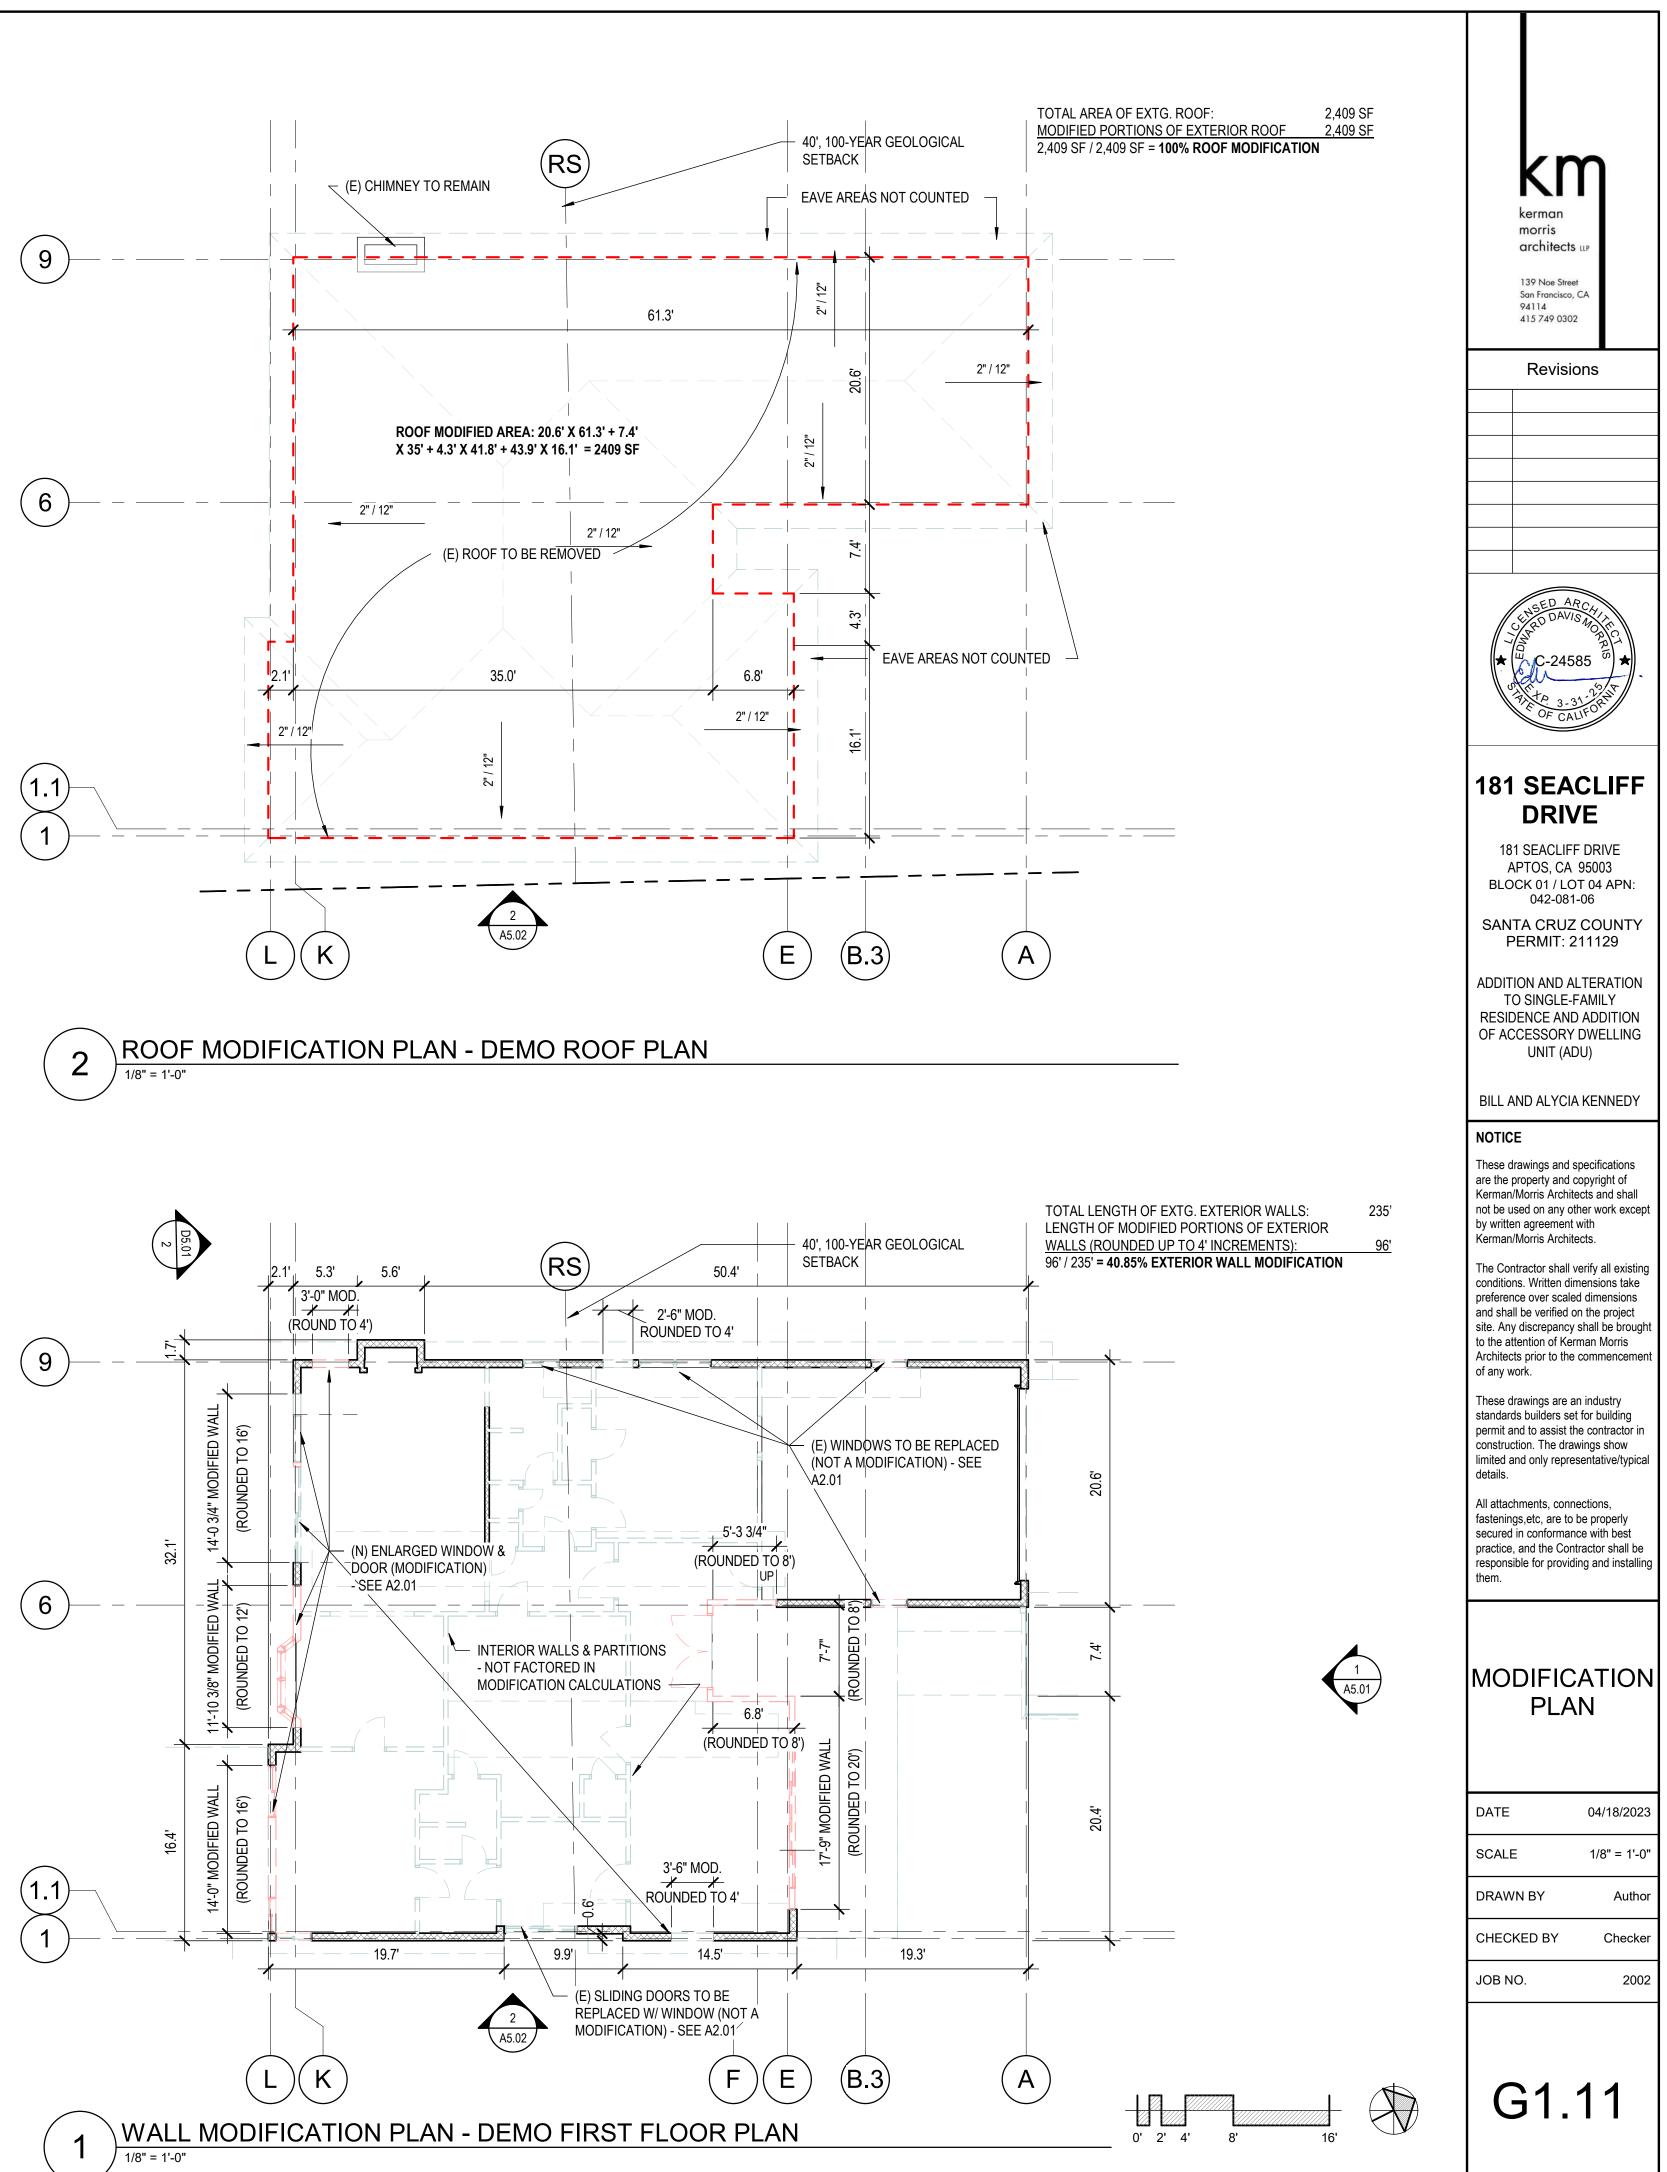

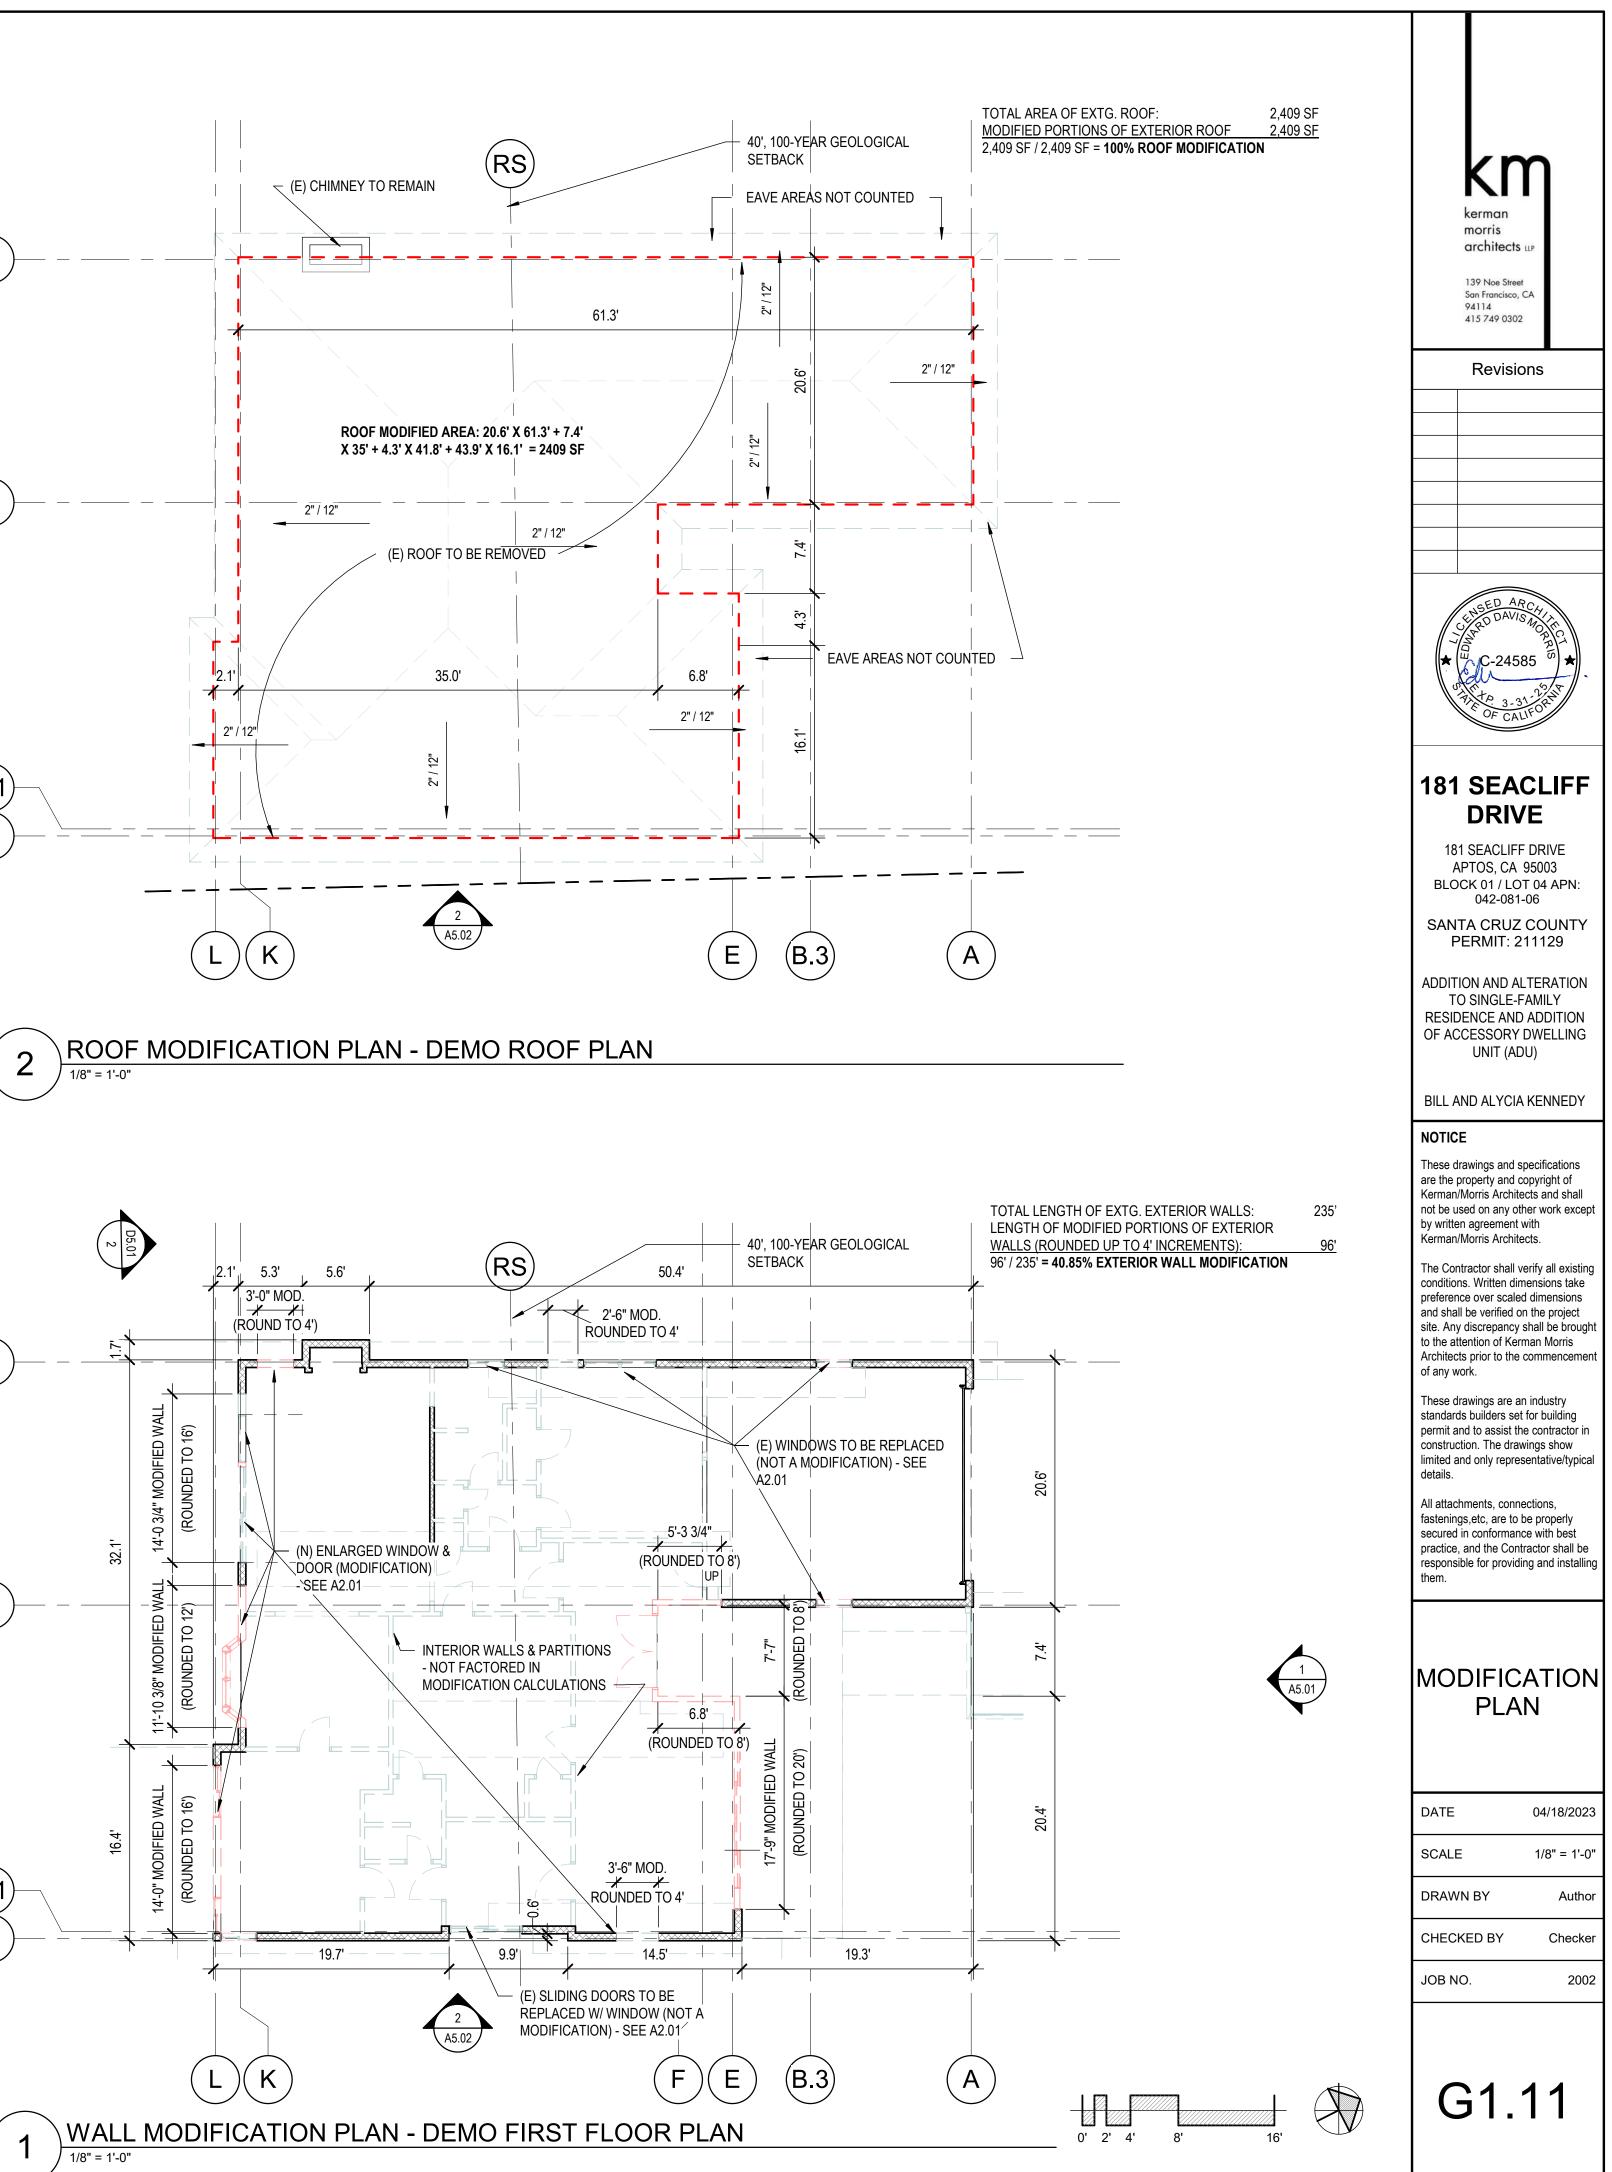

To be used in association with evaluating the extent of proposed modifications of the major structural components of a nonconforming structure or structure accomodating a nonconforming use, and for a determination whether a structure may be considered development per the Geologic Hazards Ordinance and thus may be required to prepare a geologic report or geologic assessment.

How to use this calculator: For each building component (roof, exterior walls, floor framing or foundation), you may enter either an estimated percentage to be modified or you can enter the actual measurements and use the calculator to obtain the percent modification of that component. Enter values only in the green fields. The result is given in the blue box a the bottom of the spreadsheet.

Enter either	Do not enter words or		Calculation Tips
Enter entrer	symbols		
Estimated % of roof to be modified	100%		Roof Calculation Notes:
or			Measure as a flat plane, neglecting slope. Do not
Area of Existing Roof	2409	SF	count deck roofs or eaves. Do count sealed decks tha
Total Modified Area of Roof	2409	SF	are part of the main roof system. On most one-story
	100%		structures, the roof area will equal the floor area.
		l	
<u>kterior Walls</u> Enter either			Exterior wails calculation notes:
Estimated % of exterior walls to be modified			Modified segments wrap around corners and have no
or			minimum separation. Attic walls and most cripple
Total length of existing exterior walls	236	LF	walls do not count. To assist with measuring
Total length of modified exterior walls	96	LF	modified segments in multiples of four feet, use the
	41%		wall modification calculator.
oors			
Enter either		[Floor Calculation Notes:
Estimated % of floor area to be modified			The modified area of each structural member extend
or		-	halfway to each adjacent member. For cross pieces
Total area of <u>existing</u> floors	2370	SF	and diagonal members, the modified area extends 16
Total area of modified floors	304	SF	inches on either side. Exclude decks and additions. D
Total area of <u>modified</u> hoors	13%		not use FAR guidelines.
	13/0		
oundations			
Enter either			
Estimated % of foundations to be modified			Foundation Calculation Notes:
or			Modification of a perimeter and pier and grade beam
Perimeter Foundations			foundations are measured as percentage of length;
Total length of existing perimeter foundation	250	LF	
Total length of modified perimeter foundation	58	LF	Modification of a slab is measured as percentage of
Area of first floor supported by perimeter foundation	2393	SF	area.
Slab Foundations			14/L
Total area of existing slab foundation		SF	Where piers are added or reinforced, multiply the
Total area of modified slab foundation		SF	number of modified piers by the average spacing.
Area of first floor supported by slab foundation		SF	Where one pier or anchor is added, count as a modification of 4'.
Pier and Grade Beam Foundation			modification of 4.
Total length of <u>existing</u> pier and grade beam foundation		LF	Modification of an existing foundation to enable an
Total length of <u>modified</u> pier and grade beam foundation		LF	addition is included, but not a separate addition
Area of first floor supported by pier and grade beam foundation		SF I	foundation.
	23%		
ummary			For Planning Staff Only
	15%		For Planning Staff Only If structural modifications exceed the level of
	15%		
oof Modification (15%)	15% 		If structural modifications exceed the level of
bof Modification (15%) terior Wall Modification (65%)			If structural modifications exceed the level of modification indicated below, a discretionary
oof Modification (15%) terior Wall Modification (65%) oor Framing Modification (10%)	26%		If structural modifications exceed the level of modification indicated below, a discretionary application is required.
ummary oof Modification (15%) aterior Wall Modification (65%) oor Framing Modification (10%) oundation Modification (10%)	26% 1%	_	If structural modifications exceed the level of modification indicated below, a discretionary application is required.
oof Modification (15%) tterior Wall Modification (65%) oor Framing Modification (10%)	26% 1% 2%		If structural modifications exceed the level of modification indicated below, a discretionary application is required. 65% Other* 50% No Maximum*

For spreadsheet guidelines, click the index tab (below page margin	at bottom of the	nis page) called "User Guide".
Roof	Do not enter	Calculation Tips
Enter either	words or symbols	
Estimated % of roof to be modified	100%	Roof Calculation Notes:
or	10070	Measure as a flat plane, neglecting slope. Do not
Area of Existing Roof	2409	SF count deck roofs or eaves. Do count sealed decks that
Total Modified Area of Roof	2.005	SF are part of the main roof system. On most one-story
	100%	structures, the roof area will equal the floor area.
	10070	structures, the root area win equal the hoor area.
Exterior Walls		
Enter either		Exterior wails calculation Notes:
Estimated % of exterior walls to be modified		Modified segments wrap around corners and have no
or		minimum separation. Attic walls and most cripple walls do not count. To assist with measuring
Total length of existing exterior walls	236	LF modified segments in multiples of four feet, use the
Total length of modified exterior walls	96	LF wall modification calculator.
	41%	wail modification calculator.
loors		
Enter either		Floor Calculation Notes:
Estimated % of floor area to be modified		The modified area of each structural member extends
		halfway to each adjacent member. For cross pieces
or Tatal and a facilities flager	2270	and diagonal members, the modified area extends 16
Total area of <u>existing</u> floors		SF inches on either side. Exclude decks and additions. Do
Total area of <u>modified</u> floors	304	ot use FAR guidelines.
	13%	
oundations		
Enter either		
Estimated % of foundations to be modified		Foundation Calculation Notes:
or		Modification of a perimeter and pier and grade beam
Perimeter Foundations		foundations are measured as percentage of length;
	250	LE
Total length of <u>existing</u> perimeter foundation Total length of modified perimeter foundation	58	LF Modification of a slab is measured as percentage of
	2393	SF area.
Area of first floor supported by perimeter foundation	2393	SF
Slab Foundations		Where piers are added or reinforced, multiply the
Total area of <u>existing</u> slab foundation		Dr number of modified piers by the average spacing
Total area of <u>modified</u> slab foundation	_	SF Where one nier or anchor is added, count as a
Area of first floor supported by slab foundation		SF modification of 4'.
Pier and Grade Beam Foundation		
Total length of <u>existing</u> pier and grade beam foundation	_	LF Modification of an existing foundation to enable an
Total length of <u>modified</u> pier and grade beam foundation	_	LF Jaddition is included, but not a separate addition
Area of first floor supported by pier and grade beam foundation		SF foundation.
	23%	
Summary		For Planning Staff Only
Roof Modification (15%)	15%	If structural modifications exceed the level of
		modification indicated below, a discretionary
xterior Wall Modification (65%)	26%	application is required.
loor Framing Modification (10%)	1%	□ 65% □ Other*
oundation Modification (10%)	2%	🔲 50% 🗌 No Maximum*
	45%	*Explain:
	an the second	10/0/0000
APN: 04208106 Owner Name: Bill Kennedy		Date: 10/3/2022
I certify that this worksheet is accurate. I understand that when the work exceeds the established threshold, additional permits, information, and t		

Do not ente			Calculation Tips	
Enter either	words or			
Estimated % of roof to be modified	symbols 100%		oof Calculation Notes:	
or	10078		leasure as a flat plane, neglecting slope. Do not	
Area of Existing Roof	2409		ount deck roofs or eaves. Do count sealed decks that	
Total Modified Area of Roof	2409	1751 C	re part of the main roof system. On most one-story	
Total Modified Area of Root	100%		cructures, the roof area will equal the floor area.	
	100/0			
xterior Walls				
Enter either		_	xterior wails Calculation Notes:	
Estimated % of exterior walls to be modified			lodified segments wrap around corners and have no	
or		12-22	ninimum separation. Attic walls and most cripple	
Total length of existing exterior walls	236		alls do not count. To assist with measuring	
Total length of modified exterior walls	96	I F I	nodified segments in multiples of four feet, use the	
	41%	W	all modification calculator.	
loors				
Enter either		F	oor Calculation Notes:	
Estimated % of floor area to be modified		1 TI	he modified area of each structural member extends	
or		l h	alfway to each adjacent member. For cross pieces	
Total area of <u>existing</u> floors	2370	SF a	nd diagonal members, the modified area extends 16	
Total area of modified floors	304	SF in	ches on either side. Exclude decks and additions. Do	
			ot use FAR guidelines.	
	13%			
aundations				
oundations Enter either				
Estimated % of foundations to be modified		1 E	oundation Calculation Notes:	
			lodification of a perimeter and pier and grade beam	
or			oundations are measured as percentage of length;	
Perimeter Foundations	252		napolite nanotiningan kila ng bulat nanonipagan papina naka ng kali nata di kaling bula 🖉 in kaling pangan. 🖉 tao 🔀	
Total length of <u>existing</u> perimeter foundation	250		lodification of a slab is measured as percentage of	
Total length of <u>modified</u> perimeter foundation	58	LF a	rea.	
Area of first floor supported by perimeter foundation	2393	SF		
Slab Foundations		w	/here piers are added or reinforced, multiply the	
Total area of <u>existing</u> slab foundation		SF n	umber of modified piers by the average spacing.	
Total area of <u>modified</u> slab foundation			/here one pier or anchor is added, count as a	
Area of first floor supported by slab foundation		DEL	nodification of 4'.	
Pier and Grade Beam Foundation				
Total length of <u>existing</u> pier and grade beam foundation		LF	lodification of an existing foundation to enable an	
Total length of <u>modified</u> pier and grade beam foundation			ddition is included, but not a separate addition	
Area of first floor supported by pier and grade beam foundation		DF I	oundation.	
	23%			
ummary		Г	For Planning Staff Only	
oof Modification (15%)	15%	lf	structural modifications exceed the level of	
adou de manação, Mais da Mandal Antonia da T			nodification indicated below, a discretionary	
xterior Wall Modification (65%)	26%		pplication is required.	
loor Framing Modification (10%)	1%		☐ 65% ☐ Other*	
oundation Modification (10%)	2%	╡╠	☐ 50%	
	45%	*	Explain:	
		M 1.		
APN: 04208106 Owner Name: Bill Kennedy		D	ate: 10/3/2022	
I certify that this worksheet is accurate. I understand that when the work exceeds the established threshold, additional permits, information, and		ted as	part of the application review, if the proposed v	

Exter either words of protein Externated % of noof to be modified Estimated % of noof to be modified 100% Area of Existing Roof 2409 Total Modified Area of Roof 2409 Statutures, the roof area will equal the floor are structures, the roof area will equal the floor are structures are and structuration moutes will do not court. To assist with measuring modified agreents in multiples of four free, us will do not court. To assist with measuring modified agreents in multiples of four free, us will ado not court. To assist with measuring modified agreents in multiples of four free, us will ado not court. To assist with measuring modified agreents in multiples of four free, us will ado not court. To assist with measuring and diagonal members, the modified motified area of each structural member. Total area of modified floors OOTS Enter either Estimated % of floor area to be modified Total area of guisting floors Total area of guisting floors 2370 Total area of modified floors 304 or State either Estimated % of first floor supported by sib foundation 259 Total area of diffied perimeter foundation 250 Total area of first floor supported by sib foundation 55 Area of first floor supported by sib foundation 55 Total area of digge beam foundation 55 Area	<u>pof</u>	Do not enter		Calculation Tips		
Estimated % of root to be modified 100% or Measure as a flat plane, neglecting slope. Do not sealed de are part of the main root system. On most one are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor area to be modified or Or iterior Walls Enter either Estimated % of exterior walls to be modified minimum separation. Attructural member, will do not count. To assist with measuring modification calculator. or or or wall modification calculator. OOTS Enter either Estimated % of foor area to be modified modified segments in multiples of four feet, us wall modification calculator. or or or area of modified floors or area of first floor supported by perimeter foundation or area of first floor supported by perimeter foundation or area of first floor supported by slab foundation Total length of existing perimeter foundation 230 or area of first floor supported by perimeter foundation Total length of existing perimeter foundation 233 or area of first floor supported by perimeter foundation		words or symbols		<u>calculation rips</u>		
or Area of Existing Roof 2409 SF Total Modified Area of Roof 2409 SF iterior Walls are part of the main roof system. On most one structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are at the main root system. On most one structures, the roof area will equal the floor are at the main root system. On most one structures, the roof area will equal the floor are at the main root system. On most one structures, the roof area will equal the floor area will equal the floor area to be modified 0 or Total length of existing exterior walls 236 0 or 0 or Wall & don count. To asist with measuring modified area of each structural member. To assist with measuring modified area of each structural member. To coust the wall and most one structural member. The modified area of each structural member. Total area of modified perimeter foundation <tr< td=""><td>*14000.08926000.0004000000000000000000000000000000</td><td></td><td></td><td>Roof Calculation Notes:</td></tr<>	*14000.08926000.0004000000000000000000000000000000			Roof Calculation Notes:		
Area of Existing Roof 2409 SF Total Modified Area of Roof 2409 SF Total Modified Area of Roof 2409 SF are part of the main roof system. On most one structures, the roof area will equal the floor area to the main roof system. On most one structures, the roof area will equal the floor area to the main root system. On most one structures, the roof area will equal the floor area to the modified or area to be modified or an another or another and paraton. Attic walls and most crip walls do not count. To assist with measuring modified exterior walls 2005 Enter either Estimated % of floor area to be modified or an a to be modified or an a cate adjacent member. For cross part of the modified area of each adjacent member. For cross part of the modified floors 304 304 305 SF Enter either Eloc Calculation Notes: Total area of existing perimeter foundation 2304 133% Image: Structural member and para enter anter and para enter and para enter and para ent						
Total Modified Area of Roof 2409 sr Inter either structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are and provided exterior walls to be modified Inter either Externor wars Catculation Notes: Total length of existing exterior walls 236 Inter either 4135 Inter either 4135 Inter either 4135 Inter either 500 Inter either 5	Area of Existing Roof	2409		count deck roofs or eaves. Do count sealed decks that		
Inter either Externet Walls Externet Walls to be modified Inter either Total length of existing exterior walls Colspan="2">Colspan="2" Colspan="2" Colspan="2" Colspan="2" Colspan="2" Colspan="2" Colspan="2" Colspan="2" Colspan="2" <td <<="" colspan="2" td=""><td></td><td>10.00</td><td>SF</td><td>are part of the main roof system. On most one-story</td></td>	<td></td> <td>10.00</td> <td>SF</td> <td>are part of the main roof system. On most one-story</td>			10.00	SF	are part of the main roof system. On most one-story
Enter either Kerror valls to be modified 0r minimum separation. Attic walls and noot crip walls do not count. To asist with measuring or or Finanted % of floor area to be modified Finante fitter either Eleter either Finanted % of floor area to be modified Total area of existing floors Or Total area of modified floors Or Total area of floor floor supported by perimeter foundation Or Total length of modified perimeter foundation Or Total length of modified perimeter foundation Or Total area of first floor supported by pair meter foundation Total area of first floor supported by pair meter foundation Total area of first floor supported by pair meter foundation Total area of firs				structures, the roof area will equal the floor area.		
Enter either Kerror walls to be modified or Modified segments wap around corners and minimum separation. Attic walls and most crip walls do not count. To assist with measuring wall modification calculator. OPS Floer Calculation Notes: Image: Section 2016 Contract to be modified modified segments in multiples of four feet, us wall modified area of ack structural member. The modified area extent member. Section 2017 Sec			-			
Inter either Modified segments wrap around corrers and h Modified area of colspan="2">Modified area ottp Inter either Estimated % of foundations to be modified Inter either Estimated % of foundation Total length of modified perimeter foundation Total length of modified perimeter foundation Total area of first floor supported by	erior Walls					
Estimateb % of exterior wails to be modified or Total length of existing exterior walls 236 Total length of modified exterior walls 41%	Enter either		15			
Total length of modified exterior walls 236 If Total length of modified exterior walls 96 If Attive 41% wall do not count. To assist with measuring modified segments in multiples of four feet, us wall modification calculator. OTS Enter either If If Estimated % of floor area to be modified If The modified area of each structural member halfway to each adjacent member. For cross proceed in ches on either side. Exclude decks and addition to use FAR guidelines. Indations 13% If Foundation Calculation Notes: Indations 0 0 Inter either Inter either Estimated % of foundations to be modified 0 Inter side. Exclude decks and addition to use FAR guidelines. Indations 0 0 Inter either Inter either Estimated % of foundations to be modified 0 Inter either Inter either Total length of existing perimeter foundation 250 If Modification of a siab is measured as percentage of leg foundation area of modified perimeter foundation Total length of modified perimeter foundation 2393 If Modification of a siab is measured as percentage of leg rand grade Beam foundation If Total area of modified glab found	Estimated % of exterior walls to be modified					
Total length of existing exterior walls 236 LF Total length of modified exterior walls 965 OTS 413% OTS Enter either Estimated % of floor area to be modified Indiverse of existing floors Or 0r Total area of existing floors 2370 SF Total area of modified floors Total area of modified floors 304 SF Foundations to be modified Indations 0r Enter either Estimated % of foundations to be modified Total length of existing perimeter foundation 250 Total area of existing perimeter foundation 258 Area of first floor supported by pais b foundation 259 Total area of existing siab foundation 259 Total area of modified perimeter foundation 258 Area of first floor supported by pais broundation 259 Total area of modified perimeter foundation 259 Total area of modified perimeter foundation 259 Total area of modified perimeter foundation 254 Total area of modified perimeter foundation 557 Total area of modified perimeter founda	or					
Initial length of modified pier and grade beam foundation 96 Ltr wall modification calculator. OrS Enter either Elor Calculation Notes: The modified area of each structural member. For cross principal area of gradified area extended area area. Foundation Notes: Inter and first floor supported by pier and grade beam foundation If there area area area area area area area		236	LF			
OTS Enter either Estimated % of floor area to be modified or Total area of existing floors Total area of existing floors 13% Indiations Enter either Estimated % of foundations to be modified or Total area of existing perimeter foundation Total length of existing perimeter foundation Total area of existing self boundation Total area of existing boundation Total area of first floor supported by perimeter foundation Total area of first floor supported by slab foundation Total length of existing slab foundation Total area of first floor supported by perimeter foundation Area of first floor supported by perimeter foundation Total length of existing slab foundation Total area of modified per and grade beam foundation Total area of modified bear and grade beam foundation Total length of existing perimeter foundation Total area of first floor supported by perimeter foundation Total length of existing foundation Total len	Total length of modified exterior walls	96	LF			
Enter either Estimated % of floor area to be modified or Total area of existing floors 2370 Total area of existing floors 304 13% 13% Indations 13% Enter either 13% Estimated % of foundations to be modified Inches on either side. Exclude decks and addition to use FAR guidelines. Perimeter Foundations 250 Total length of existing perimeter foundation 250 Total length of existing also foundations 250 Total area of existing floor supported by perimeter foundation 259 Stab Foundations 259 Area of first floor supported by perimeter foundation 557 Area of first floor supported by also foundation 557 Area of first floor supported by slab foundation 557 Area of first floor supported by slab foundation 557 Area of first floor supported by slab foundation 557 Area of first floor supported by slab foundation 557 Area of first floor supported by slab foundation 557 Area of first floor supported by slab foundation 557 Area of first floor supported by slab foundation <t< td=""><td></td><td>41%</td><td></td><td></td></t<>		41%				
Estimated % of floor area to be modified The modified area of each structural member. For cross pi and diagonal members, the modified area extended and diagonal members. The modified area extended and diagonal members, the modified area extended and diagonal members. The modified area extended area extended area extended and diagonal members. The modified area extended area extended area extended foundation area extended and prevented by preventer foundation area. Item area of first floor supported by perimeter foundation Item area. Item area of first floor supported by perimeter foundation Item area. Item area of first floor supported by pier and grade beam foundation Item area. Item area of modified pier and grade beam foundation Item area. Item area of first floor (10%) Item area area. Item area of first floor (10%) Item area area.	ors					
Industry For Planning Staff Only Industry Industry	Enter either					
Total area of existing floors 2370 string floors and diagonal members, the modified area exter inches on either side. Exclude decks and addition to use FAR guidelines. 13% 13% undations 13% Enter either 13% Estimated % of foundations to be modified Image: Comparison of the string floors 0 r 0 r Total length of existing perimeter foundation 250 Total length of existing perimeter foundation 250 Total length of modified perimeter foundation 58 Area of first floor supported by perimeter foundation 2380 Modification of a slab is measured as percentage of least string slab foundation 58 Area of first floor supported by slab foundation 58 Area of first floor supported by slab foundation 58 Total length of existing peri and grade beam foundation 58 Total length of modified pier and grade beam foundation 58 Area of first floor supported by pier and grade beam foundation 58 Total length of modified pier and grade beam foundation 58 Area of first floor supported by pier and grade beam foundation 58 Area of first floor supported by pier and grade beam foundation 58	Estimated % of floor area to be modified			The modified area of each structural member extends		
Total area of existing iteors 2370 5F Total area of modified floors 304 5F 13% 13% inches on either side. Exclude decks and additi not use FAR guidelines. 13% 13% inches on either side. Exclude decks and additi not use FAR guidelines. 13% 13% inches on either side. Exclude decks and additi not use FAR guidelines. 13% 13% inches on either side. Exclude decks and additi not use FAR guidelines. 13% or Modification Calculation Notes: Modification of a perimeter foundation 250 UF Total length of existing perimeter foundation 58 F Modification of a slab is measured as percentarea. Modification of a slab is measured as percentarea. Vhere one pier or anchor is added, count as a modified perimeter foundation 56 Total area of existing slab foundation 56 Total area of modified pier and grade beam foundation 56 Total length of existing peir and grade beam foundation 56 Total length of modified pier and grade beam foundation 56 Area of first floor supported by pier and grade beam foundation 57 Area of first floor supported by pier and grade beam foundation 56	or			halfway to each adjacent member. For cross pieces		
Total area of modified floors 304 SF Inches on either side. Exclude decks and additinot use FAR guidelines. 13% 13% Inditions 13% Enter either Foundation to be modified or Modification of a perimeter and pier and grade foundations are measured as percentage of let Total length of existing perimeter foundation 250 Total area of first floor supported by perimeter foundation 2393 Stab Foundations Modification of a slab is measured as percentage of let Total area of existing slab foundation 2393 Total area of modified slab foundation 256 Area of first floor supported by slab foundation 56 Total length of existing pier and grade beam foundation 57 Total length of modified pier and grade beam foundation 57 Total length of modified pier and grade beam foundation 56 Area of first floor supported by pier and grade beam foundation 57 Total length of modified pier and grade beam foundation 57 Area of first floor supported by pier and grade beam foundation 57 Area of first floor supported by pier and grade beam foundation 57 Area of first floor supported by pier and grade beam fo	Total area of <u>existing</u> floors	2370	SF	and diagonal members, the modified area extends 16		
13% Enter either Estimated % of foundations to be modified or Modification of a perimeter and pier and grade foundations are measured as percentage of lear of modified perimeter foundation Total length of <u>existing</u> perimeter foundation Total length of <u>existing</u> slab foundation Stab Foundations Where piers are added or reinforced, multiply number of modified piers by the average space of modified piers by the average space of modified pier and grade beam foundation Total area of <u>modified</u> gier and grade beam foundation Total length of <u>existing</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation <t< td=""><td></td><td>304</td><td>SF</td><td>inches on either side. Exclude decks and additions. Do</td></t<>		304	SF	inches on either side. Exclude decks and additions. Do		
Enter either Estimated % of foundations to be modified or Total length of existing perimeter foundation Total length of modified primeter foundation Area of first floor supported by perimeter foundation Total area of existing slab foundation Total area of modified slab foundation Total area of first floor supported by slab foundation Area of first floor supported by slab foundation Area of first floor supported by slab foundation Total area of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Z3% Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier Total lengt		13%		not use FAR guidelines.		
Enter either Estimated % of foundations to be modified Or Or Total length of existing perimeter foundation Area of first floor supported by perimeter foundation Total area of existing slab foundation Total area of existing slab foundation Area of first floor supported by parimeter foundation Total area of modified glab foundation Area of first floor supported by slab foundation Area of first floor supported by slab foundation Total area of modified glab foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Total length of <u>modified</u> pier and grade beam foundation Z3% Pier and Grade Beam Foundation Z3% Pier and Grade Beam foundation Total length of <u>modified</u> pier and grade beam foundation Z3% Pier and Grade Beam foundation Z3% Pier and Grade Beam foundation Z3% Modificati						
Estimated % of foundations to be modified Foundation or Perimeter Foundations Total length of existing perimeter foundation 250 Area of first floor supported by perimeter foundation 2393 Slab Foundations SF Modification of a slab is measured as percenta area. Where piers are added or reinforced, multiply Total area of existing slab foundation SF Modification of a slab is measured as percenta area. Where piers are added or reinforced, multiply muber of modified piers by the average spaci Where one pier or anchor is added, count as a modification of 4'. Modification of a nexisting foundation SF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by slab						
or Modification of a perimeter and pier and grade foundations are measured as percentage of let foundations are measured as percentage of let foundations are measured as percentage of let foundation supported by perimeter foundation Area of first floor supported by perimeter foundation 2393 Stab Foundations Modification of a slab is measured as percentage of let area. Modification of a slab is measured as percentage of existing slab foundation 2393 Total area of modified perimeter foundation SF Area of first floor supported by slab foundation SF Mere one pier or anchor is added, count as a modification of a slab perimeter by slab foundation SF Total length of existing pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF f Modification (15%) 15% mmary f f Modification (15%) 26% mation Modification (10%) 1% mation Modification (10%) 2% 45% 50%				Foundation Calculation Notes:		
Or an antipage of the second						
Total length of existing perimeter foundation 250 LF Total length of modified perimeter foundation 58 LF Area of first floor supported by perimeter foundation 2393 SF Slab Foundations Where piers are added or reinforced, multiply number of modified piers by the average spaci where one pier or anchor is added, count as a modification of 4'. Where one pier or anchor is added, count as a modification of 4'. Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Total length of modified pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Trior Wall Modification (15%) 15% If Structural modifications exceed the level of modification is required. 65% Ir Framing Modification (10%) 2% 45% 50% No Maximum*						
Total length of modified perimeter foundation 58 LF Modification of a slab is measured as percents area. Area of first floor supported by perimeter foundation 2393 SF Stab Foundations 313 SF Total area of gristing slab foundation SF Area of first floor supported by slab foundation SF Area of first floor supported by slab foundation SF Total length of modified pier and grade beam foundation SF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF f Modification (15%) 15% riror Wall Modification (10%) 26% ndation Modification (1		250	-	, , ,		
Area of first floor supported by perimeter foundation 2393 srea. Area of first floor supported by perimeter foundation 393 srea. Total area of existing slab foundation 55 Where piers are added or reinforced, multiply number of modified piers by the average spaci Where one pier or anchor is added, count as a modification of 4'. Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF f Modification (15%) 15% f Modification (15%) 26% mation Modification (10%) 1% ndation Modification (10%) 2% 45% 50% No Maximum*			1.	Modification of a slab is measured as percentage of		
Slab Foundations Total area of existing slab foundation SF Total area of inst floor supported by slab foundation SF Area of first floor supported by slab foundation SF Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Total length of modification (15%) 23% Total length of (15%) 15% For Planning Staff Only If structural modification secced the level of modification indicated below, a discretionary application is required. rior Wall Modification (10%) 2% mation Modification (10%) 2% 45% SO% No Maximum*				area.		
Total area of existing slab foundation SF Total area of modified slab foundation SF Area of first floor supported by slab foundation SF Pier and Grade Beam Foundation SF Total length of existing pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF f Modification (15%) 23% mmary For Planning Staff Only If structural modification secced the level of modification in inclated below, a discretionary application is required. mrior Wall Modification (10%) 1% mdation Modification (10%) 2% 45% 50% Other*		2393				
Total area of modified slab foundation SF Area of first floor supported by slab foundation SF Pier and Grade Beam Foundation LF Total length of existing pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF f Modification (15%) 23% mmary For Planning Staff Only If structural modifications exceed the level of modification indicated below, a discretionary application is required. modification (10%) 2% 45% 50% Other*			SE	Where piers are added or reinforced, multiply the		
Area of first floor supported by slab foundation SF Where one pier or anchor is added, count as a modification of 4'. Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF mmary 23% f Modification (15%) 15% errior Wall Modification (65%) 26% or Framing Modification (10%) 1% ndation Modification (10%) 2% 45% 50% Other*			-	number of modified piers by the average spacing.		
Pier and Grade Beam Foundation Immodification of 4 ² . Total length of existing pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF mmary 23% f Modification (15%) 15% erior Wall Modification (65%) 26% or Framing Modification (10%) 1% ndation Modification (10%) 2% 45% SO%				Where one pier or anchor is added, count as a		
Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Description 23% Modification of an existing foundation of an existing foundation to enable addition is included, but not a separate addition foundation. Description 23% Modification (15%) 15% Error Wall Modification (65%) 26% or Framing Modification (10%) 1% Indation Modification (10%) 2% 45% 50% Other* 50% No Maximum*			-	modification of 4'.		
Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF 23% 23% mmary f Modification (15%) erior Wall Modification (65%) 26% or Framing Modification (10%) 1% ndation Modification (10%) 2% 45% 50% No Maximum*			LF			
Area of first floor supported by pier and grade beam foundation SF addition is included, but not a separate addition foundation. 23% SF f Modification (15%) f Modification (15%) grior Wall Modification (65%) or Framing Modification (10%) ndation Modification (10%) 45% SF addition is included, but not a separate addition foundation. SF addition is included, but not a separate addition foundation. SF For Planning Staff Only If structural modifications exceed the level of modification indicated below, a discretionary application is required. 65% 0ther* 50% No Maximum* *Explain:			LF	Modification of an existing foundation to enable an		
23% mmary f Modification (15%) 15% error Wall Modification (65%) 26% or Framing Modification (10%) 1% mdation Modification (10%) 2% 45% Explain:			SF			
f Modification (15%) 15% grior Wall Modification (65%) 26% or Framing Modification (10%) 1% indation Modification (10%) 2% 45% Explain:		23%				
of Modification (15%) 15% erior Wall Modification (65%) 26% or Framing Modification (10%) 1% indation Modification (10%) 2% 45% *Explain:	mmary			For Planning Staff Only		
erior Wall Modification (65%) or Framing Modification (10%) ndation Modification (10%) 2% 45% modification indicated below, a discretionary application is required. 0 0 0 1% 0 0 1% 0 1% 0 1%		150/	-			
erior Wall Modification (65%) 26% or Framing Modification (10%) 1% indation Modification (10%) 2% 45% *Explain:		15%	-			
br Framing Modification (10%) 1% 65% Other* Indation Modification (10%) 2% 50% No Maximum* 45% Explain:	erior Wall Modification (65%)	26%		이 같은 것은 것은 것은 것은 것은 것은 것은 것은 것을 가지 않는 것은 것을 가지 않는 것을 것을 것을 것을 수 있다. 것을 가지 않는 것을		
ndation Modification (10%) 2% 50% No Maximum* 45% *Explain:						
45% *Explain:			-			
D/0/00000		ШV.	-10	10/0/0000		
N: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022	N: 04208106 Owner Name: Bill Kennedy			Date: 10/3/2022		

Enter either winded symbol Enter either Estimated % of roof to be modified 100% Are a of Existing Roof 2409 Total Modified Area of Roof 2409 Sterrior Walls are a of the main roof system. On most one structures, the roof area will equal the floor ar or Exterior Walls Enter either Estimated % of exterior walls to be modified minimum separation. Attic walls and most crip walls do not count. To assist with measuring modified segments in multiples of four feet, us wall modification calculator. Total length of existing exterior walls 260 Ioors Floor Calculation Notes: Total area of existing floors 2370 Total area of modified and Total area of existing floors 2370 Total area of modified floors 304 Stimated % of foundations to be modified and Total area of modified perimeter foundation 280 Total area of first floor supported by pair meter foundation 280 Total area of first floor supported by pair meter foundation 280 Total area of first floor supported by pair meter foundation 280 Total area of first floor supported by pair meter foundation </th <th></th> <th></th> <th>nis page) called "User Guide".</th>			nis page) called "User Guide".
Enter either appricing Composition Composition Are and Existing Roof 2409 Total Modified Area of Roof 2409 Status Status Exterior Walls are and Existing Roof Exterior Walls are and Existing Roof Exterior Walls are and Existing Roof Total length of existing exterior walls 236 Total length of existing exterior walls 236 Total length of existing exterior walls 236 Total length of existing floors 2370 Total area of existing floors 2370 Statuated % of floor area to be modified Total area of existing floors Total area of existing floors 2370 Status 13% Exter either Total area of existing floors Exter either Exter either Exter either Modified exter and prior area are added or reinforced, multiply Total area of first floor supported by perimeter foundation 250 Total length of existing brimeter foundation 250 Total length of existing brimeter foundation 250 Total length of existing brimeter foundation 253 </th <th>Roof</th> <th></th> <th>Calculation Tins</th>	Roof		Calculation Tins
Estimated % of roof to be modified 100% or 0 Area of Existing Roof 2409 Total Modified Area of Roof 2409 Siterior Walls are and totals neglecting slope. Do neglectin	Enter either		
or Area of Existing Roof 2409 SF Total Modified Area of Roof 2409 SF icount deck roofs or seves. Do count sealed det are part of the main roof system. On most one structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are structures, the roof area will equal the floor are are will equal the floor are are will equal the floor are are and ergo are and to floor feet, us will do not count. To assist with measuring modified agements in multiples of floor feet, us will do not count. To assist with measuring modified agements in multiples of floor feet, us will do not count. To assist with measuring are of modified area or each structural member. To count area of area of floor feet, us will do not count. To assist with measuring area of modified floors ioors Enter either Estimated % of floor area to be modified Total area of existing floors Total area of modified floors 304 ior 13% Foundations 250 For and area of first floor supported by slab foundation 250 Total length of existing pler and grade beam foundation 250 Total length of existing pler and grade beam foundation 250 Total area			Roof Calculation Notes:
Area of Existing Roof 2409 Form Count deck roofs or eves. Do count sealed deck Total Modified Area of Roof 2409 SF Form and total not root system. On most one structures, the roof area will equal the floor and structures, will and most croit and structures, will modified segments in multiples of four feet, us will modified area enters. Tor cross pi and floor and structures and pier and grade beam foundation and floor and area of modified floors and and structures and pier and grade beam foundation area. Form and area of each structural member inforced, multiply mumber of modified piers by the average space and floor floor area to be modified area enter inforced, multiply for and area of modified stoe modation area. Stab Foundation <td></td> <td></td> <td></td>			
Total Modified Area of Roof 2409 SF are part of the main roof system. On most one structures, the roof area will equal the floor area to the most one structures, the roof area will equal the floor area to the modified Exterior Walls Extereither Estimated % of exterior walls 236 tr Total length of existing exterior walls 236 tr Total length of existing exterior walls 243 tr Total length of existing exterior walls 246 tr Corr auto and the modified exterior walls 246 Corr auto and the modified exterior walls 246 Corr auto and the modified exterior walls 247 Corr auto and the modified exterior walls 248 Corr auto and the modified exterior walls 249 Corr auto and the modified exterior walls 249 Corr auto and the modified exterior walls 257 Total area of existing floors 2304 57 Foundations 250 56 Total length of existing perimeter foundation 259 56 Total length of existing stab foundation 259 57 Total length of modified		2409	
IDD0% structures, the roof area will equal the floor ar structures, the roof area will equal the floor ar Structures, the roof area will equal the floor ar Structures, the roof area will equal the floor ar Modified segments are will equal the floor ar Structures, the roof area will equal the floor ar Structures, the roof area will equal the floor ar Colspan="2">Structures, the roof area will equal the floor ar Structures, the roof area will equal the floor ar Modified segments in multiples of four feet, us will modified area of each structural member of adge ant member. For cross pi and diagonal member, for cross pi and the structural member on the side. Exclude decks and additi not use FAR guidelines. Structure floor area to be modified Or Total area of existing perimeter foundation Structure floor field floor of a stab is measured as percent area. Modification of a stab is measured as percent area. Modification of a stab is measured as percent area.		1000 0000000000000000000000000000000000	
Enter either Exterior walls to be modified 0r or Total length of existing exterior walls 236 Total length of modified exterior walls 96 413% 41% Ioors 41% Ioors 41% Ioors 41% Ioors 41% Ioors 6 Enter either 55 Total length of modified floors 2370 Total area of existing floors 2370 Total area of modified floors 304 0undations 13% Coundations 6 Enter either 55 Estimated % of foundations to be modified 6 or 0 Total length of divising perimeter foundation 250 Fitter and fitted begrave to be modified 6 Total length of divising berimeter foundation 250 Fitter and Grade Beam Foundation 250 Total length of divising slab foundation 250 Total length of divising brows 250 Sibb boundations 250 Total length of divising brows 250<			structures, the roof area will equal the floor area.
Enter either Exterior walls to be modified 0r or Total length of existing exterior walls 236 Total length of modified exterior walls 96 413% 41% Ioors 41% Ioors 41% Ioors 41% Ioors 41% Ioors 6 Enter either 55 Total length of modified floors 2370 Total area of existing floors 2370 Total area of modified floors 304 0undations 13% Coundations 6 Enter either 55 Estimated % of foundations to be modified 6 or 0 Total length of divising perimeter foundation 250 Fitter and fitted begrave to be modified 6 Total length of divising berimeter foundation 250 Fitter and Grade Beam Foundation 250 Total length of divising slab foundation 250 Total length of divising brows 250 Sibb boundations 250 Total length of divising brows 250<			
Litter either Modified segments wrap around corners and the minimum separation. Attic walls and most cript. Modified segments wrap around corners and the minimum separation. Attic walls and most cript. Modified segments in multiples of four feet, us wall and ont count. To assist with measuring modified segments in multiples of four feet, us wall modification calculator. Inter either Enter either Enter either Total area of existing floors Or Total area of existing floors Total area of existing floors Total area of existing floors Total area of existing perimeter foundation Total area of first floor supported by perimeter foundation Total length of modified perimeter foundation Total area of first floor supported by perimeter foundation Total area of existing perimeter foundation Total area of first floor supported by slab foundation Supported by perimeter foundation Total area of first floor supported by slab foundation Total area of first floor supported by slab foundation Total area of first floor supported by slab found	xterior Walls		
Estimated Image: Second S			
or wall so not count. To assist with measuring modified segments in multiples of four feet, us wall modification calculator. loors 41% loors 41% loors 41% loors 41% loors 41% loors 6 enter either 6 istimated % of floor area to be modified 6 Total area of existing floors 2370 istimated % of foundations to be modified 6 inter either 13% looraditions 13% oundations 13% or 13% or 6 Total length of existing perimeter foundation 250 or 13% or 6 Total length of existing perimeter foundation 2393 Sib Foundations 5 or 6 Total area of first floor supported by perimeter foundation 5 or 7 Total area of first floor supported by paidoundation 5 or 6 Total area of first floor supported by parimet foundation 5 <t< td=""><td>Estimated % of exterior walls to be modified</td><td></td><td></td></t<>	Estimated % of exterior walls to be modified		
Iotal length of existing exterior walls 236 LF modified segments in multiples of four feet, us Ioors 41% wall modified segments in multiples of four feet, us Ioors 41% Ioors 6 Estimated % of floor area to be modified 7 or 7 Total area of existing floors 2370 State are of floor floor floor 7 Total area of floor foundations to be modified 7 13% 13% or 7 Oundations 6 Estimated % of foundations to be modified 7 Total length of existing perimeter foundation 230 Stab Foundations 256 Modification of a slab is measured as percentage of lead fict floor supported by perimeter foundation 2393 Stab Foundations 257 Pier and First floor supported by slab foundation 557 Total length of existing pier and grade beam foundation 557 Total length of existing pier and grade beam foundation 557 Total length of existing pier and grade beam foundation 557 Total length of existing fuer and grade beam foundation 557 <t< td=""><td></td><td></td><td></td></t<>			
Initial length of modified performance externor waits 96 LF wall modification calculator. Ideors 41% wall modification calculator. Inter either Estimated % of floor area to be modified The modified area of each structural member of halfway to each adjacent member. For cross pi and diagonal members, the modified area exterior halfway to each adjacent member. For cross pi and diagonal members, the modified area exterior wall work to each adjacent member. For cross pi and diagonal members, the modified area exterior wall member of foundations to be modified 0undations 13% Inches on either side. Exclude decks and addition to use FAR guidelines. Enter either Estimated % of foundations to be modified Modification of a perimeter and pier and grade foundation are measured as percentage of ler fortal length of modified perimeter foundation Total length of modified perimeter foundation 2393 Stab Foundations 2393 Stab Foundation 55 Area of first floor supported by primeter foundation 55 Area of first floor supported by pair and grade beam foundation 55 Area of first floor supported by pair and grade beam foundation 55 Area of first floor supported by pair and grade beam foundation 55 Area of first floor supported by pair and grade beam foundation 55 Area of first floor supporte		236	
41% loors Enter either Floor Calculation Notes: Total area of existing floors Total area of existing floors Total area of existing floors Total area of modified floors Total area of modified floors Total area of modified floors Total area of floor area to be modified Total area of floor area to be modified Total area of floor supported by perimeter foundation Or Total length of existing perimeter foundation Total area of first floor supported by perimeter foundation Set Area of first floor supported by perimeter foundation Total area of modified area floor dealtoin Total area of modified slab foundation Total area of first floor supported by perimeter foundation Total area of first floor supported by perimeter foundation Total area of first floor supported by alab foundation Total area of first floor supported by perimeter foundation Total area of first floor supported by alab foundati	Total length of modified exterior walls	96	
Enter either Floor Calculation Notes: 0r Total area of existing floors 2370 13% 13% and diagonal members, for cross pil and grade beam foundation 0 total length of <u>existing perimeter foundation</u> 250 UF Area of first floor supported by perimeter foundation 257 0 total area of <u>gristing slab foundation</u> 557 0 total area of <u>modified pil and grade beam foundation</u> 557 <		41%	
Estimated % of floor area to be modified 0r Total area of existing floors 2370 Total area of modified floors 304 55 13% 13% and diagonal members, he modified and diagonal members, he modified area extere inches on either side. Exclude decks and addition to use FAR guidelines. 0undations 13% 0undations 55 Enter either 58 0undations 58 0r 70	loors		
Extended % of nool area to be modified or Total area of existing floors 2370 Total area of existing floors 304 13% 13% oundations 13% Enter either 13% Estimated % of foundations to be modified or 55 Total length of existing perimeter foundation 250 Total length of modified perimeter foundation 250 Total length of modified perimeter foundation 250 Total area of first floor supported by perimeter foundation 2393 Sab Foundations 257 Total area of modified perimeter foundation 259 Total area of modified slab foundation 55 Total area of modified slab foundation 55 Total area of modified perimeter foundation 55 Total length of modified perimeter foundation	Enter either		
or Image: stress of existing floors 2370 334 Total area of existing floors 304 55 Total area of modified floors 304 55 Instance 13% 13% oundations 13% 13% oundations 13% 13% oundations 13% 13% oundations 0 13% or 13% 13% Total length of existing perimeter foundation 250 Total length of modified perimeter foundation 2893 Slab Foundations 16% Total area of existing slab foundation 55 Total area of modified perimeter foundation 58 Slab Foundation 55 Outal ength of cade Beam Foundation 55 Total area of modified slab foundation 55 Total length of adrade Beam Foundation 55 Total length of modified pier and grade beam foundation 55 Total length of existing pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Area of first floor supported by slab foundation 55	Estimated % of floor area to be modified		The modified area of each structural member extend
Total area of <u>existing iteors</u> 23/0 37 Inchase on either side. Exclude decks and additinat use FAR guidelines. 13% oundations 13% oundations Enter either Estimated % of foundations to be modified 0 or 0 Total length of existing primeter foundation 250 Total length of <u>modified perimeter foundation</u> 250 View primeter foundations 0 Total area of first floor supported by perimeter foundation 2393 Stab Foundations 54 Area of first floor supported by slab foundation 55 Outal area of existing pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Area of first floor supported by slab foundation 55 Total length of modified pier and grade beam foundation 55 Area of first floor supported by pier and grade beam foundation 55 Area of first floor supported by pier and grade beam foundation 55 Area of first floor supported by pier and grade beam foundation 55 Area of first floor supported by pier and grade beam foundatio			halfway to each adjacent member. For cross pieces
Total area of modified floors 304 SF Inches on either side. Exclude decks and addition to use FAR guidelines. 13% Doundations Enter either Enter either Stab foundations to be modified Or Modification Of a perimeter and pier and grade foundation are measured as percentage of lear area. Total length of existing perimeter foundation Total area of modified perimeter foundation Total area of modified perimeter foundation Total area of modified slab foundation Total area of modified perimeter foundation Total area of modified slab foundation Total area of modified peri and grade beam foundation Total length of existing pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation		2370	SF and diagonal members, the modified area extends 16
not use FAR guidelines. not use FAR guidelines. total use of foundations to be modified or Guidation Calculation Notes: Modification of a perimeter and pier and grade foundations are measured as percentage of ler Modification of a slab is measured as percentage of ler Modification of a slab is measured as percentage of ler Total length of modified perimeter foundation 2393 Stab Foundation Total area of existing slab foundation 2393 Total area of modified perimeter foundation SF Total area of modified slab foundation SF Total area of modified pier and grade beam foundation SF Total length of existing pier and grade beam foundation SF Total length of modified pier and grade beam foundation SF Total length of modified pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF <			to show on state so state. Evolution descher and additions. D
Series are added or reinforced, multiply number of modified piers by the average spaci where one pier or anchor is added, count as a modification of 4.'. For Planning Staff Only If structural modification (15%) Total length of existing perimeter foundation Area of first floor supported by perimeter foundation 55F Area of first floor supported by perimeter foundation 55F Modification of a slab is measured as percentage of ler area. Where piers are added or reinforced, multiply number of modified piers by the average spaci Where one pier or anchor is added, count as a modification of a existing foundation Total length of existing pier and grade beam foundation 1FF Total length of modified pier and grade beam foundation 1FF Area of first floor supported by pier and grade beam foundation 1FF Area of first floor supported by pier and grade beam foundation 1FF Modification (15%) 15% ummary 23%			
Enter either Estimated % of foundations to be modified or Total length of existing perimeter foundation Total length of modified perimeter foundation Slab Foundations Modification of a slab is measured as percentage of length Modification of a slab is measured as percentage of length Modification of a slab is measured as percentage of length Area of first floor supported by perimeter foundation Total area of modified slab foundation Total area of modified slab foundation Total length of existing perimeter and grade beam foundation Total area of first floor supported by slab foundation Total length of existing peri and grade beam foundation Total length of existing peri and grade beam foundation Total length of modified pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Total length of modified pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of modified pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Total length of modification (15%) Gomodification (15%)		1370	a
Enter either Estimated % of foundations to be modified Or Total length of existing perimeter foundation Total length of modified perimeter foundation Slab Foundations Modification of a slab is measured as percentage of ler Area of first floor supported by perimeter foundation Total area of modified slab foundation Total area of modified slab foundation Total area of first floor supported by slab foundation Total length of existing perimeter foundation Total area of first floor supported by slab foundation Total length of existing perimeter foundation Total length of existing perimeter foundation Total area of first floor supported by slab foundation Total length of existing pier and grade beam foundation Total length of existing pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of modification (15%) Total length of modification (10%) Sterior Sterior Wall Modification (10%) <td></td> <td></td> <td></td>			
Estimated % of foundations to be modified Foundation Calculation Notes: or Modification of a perimeter and pier and grade foundations are measured as percentage of ler doundations of a slab is measured as percentage of ler area. Total length of <u>modified</u> perimeter foundation 250 LF Area of first floor supported by perimeter foundation 2393 SF Slab Foundations SF Modification of a slab is measured as percentage area. Total area of <u>modified</u> slab foundation SF Where piers are added or reinforced, multiply number of modified piers by the average spaci Total area of first floor supported by slab foundation SF Total length of <u>existing</u> pier and grade beam foundation LF Total length of <u>modified</u> pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Total length of <u>modified</u> pier and grade beam foundation LF Modification (15%) 23% SF For Planning Staff Only Internet Wall Modification (10%) 1% oundation Modification (10%) 2%			
or Modification of a perimeter and pier and grade Total length of existing perimeter foundation Total length of modified perimeter foundation Area of first floor supported by perimeter foundation Total area of existing slab foundation Total area of modified alab foundation Total area of modified slab foundation Total area of modified perimeter by slab foundation Total area of modified slab foundation Total area of modified perimeter by slab foundation Total area of modified perimeter by slab foundation Total area of modified perimeter by slab foundation Total length of existing pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of modification (15%) Total length of first floor supported by pier and grade beam foundation Total length of modification (15%) </td <td></td> <td></td> <td></td>			
Or an analysis of the second	Estimated % of foundations to be modified		and the second
Total length of existing perimeter foundation 250 LF Area of first floor supported by perimeter foundation 2393 Slab Foundations 357 Modification of a slab is measured as percenta area. Where piers are added or reinforced, multiply number of modified piers by the average spaci Where one pier or anchor is added, count as a modification of 4'. Total length of existing pier and grade beam foundation 557 Area of first floor supported by pier and grade beam foundation 557 Total length of modified pier and grade beam foundation 557 Area of first floor supported by pier and grade beam foundation 557 Area of first floor supported by pier and grade beam foundation 557 Area of first floor supported by pier and grade beam foundation 557 Area of first floor supported by pier and grade beam foundation 557 Area of first floor supported by pier and grade beam foundation 557 Area of first floor supported by pier and grade beam foundation 557 Area of first floor supported by pier and grade beam foundation 557 Area of first floor supported by pier and grade beam foundation 557 Corr Framing Modification (15%) 15% Corr Framing Modification (10%) 26%	or		
Total length of modified perimeter foundation 58 LF Modification of a slab is measured as percenta area. Area of first floor supported by perimeter foundation 2393 SF Slab Foundations area. Total area of existing slab foundation SF Area of first floor supported by slab foundation SF Area of first floor supported by slab foundation SF Total length of existing pier and grade beam foundation SF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Ummary 23% Doof Modification (15%) 15% Goor Framing Modification (10%) 1% Doublication Modification (10%) 2%	Perimeter Foundations		foundations are measured as percentage of length;
Initial length of modified perimeter foundation 58 LF Area of first floor supported by perimeter foundation 2393 SF Stab Foundations SF Otal area of existing slab foundation SF Total area of modified slab foundation SF Area of first floor supported by slab foundation SF Area of first floor supported by slab foundation SF Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Modification (15%) 23% Ummary	Total length of existing perimeter foundation	250	
Area of first floor supported by perimeter foundation 2393 Sr Stab Foundations Sr Total area of existing slab foundation Sr Area of first floor supported by slab foundation Sr Area of first floor supported by slab foundation Sr Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation Sr Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Modification of an existing foundation to enab addition is included, but not a separate addition foundation. Sr Dependence 23% Sr Modification (15%) 15% Sr Modification (10%) 1% Sr Dependence Sr Sr Modification (10%) 2% Sr	Total length of modified perimeter foundation	58	
Total area of existing slab foundation SF Total area of modified slab foundation SF Area of first floor supported by slab foundation SF Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Where piers are added or reinforced, multiply number of modified piers by the average spaci Where one pier or anchor is added, count as a modification of 4'. Modification of an existing foundation LF Area of first floor supported by pier and grade beam foundation SF Ummary 23% Sof Modification (15%) 15% Modification (65%) 26% oor Framing Modification (10%) 1% Sof (10%) 2%	Area of first floor supported by perimeter foundation	2393	SF area.
Total area of modified slab foundation SF Total area of modified slab foundation SF Area of first floor supported by slab foundation SF Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF Ummary SF poof Modification (15%) 15% modification (65%) 26% poor Framing Modification (10%) 1% poundation Modification (10%) 2%	Slab Foundations		
Total area of modified slab foundation SF Area of first floor supported by slab foundation SF Pier and Grade Beam Foundation SF Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Qummary 23% poof Modification (15%) 15% wterior Wall Modification (65%) 26% oor Framing Modification (10%) 1% pundation Modification (10%) 2%	Total area of existing slab foundation		
Area of first floor supported by stab foundation SF Modification of 4'. Modification of 4'. Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF 23% 23% Ummary SF poof Modification (15%) 15% deterior Wall Modification (65%) 26% oor Framing Modification (10%) 1% pundation Modification (10%) 2%			SE
Pier and Grade Beam Foundation Import for the second s	Area of first floor supported by slab foundation		SF
Total length of modified pier and grade beam foundation Area of first floor supported by pier and grade beam foundation 23% Ummary Dof Modification (15%) sterior Wall Modification (65%) oor Framing Modification (10%) Dom Modification (10%) Area of first floor supported by pier and grade beam foundation SF Modification of an existing foundation to enable addition is included, but not a separate addition foundation. 23% SF Modification of an existing foundation to enable addition is included, but not a separate addition foundation. 23% SF Modification of an existing foundation to enable addition is included, but not a separate addition foundation. 23% SF For Planning Staff Only If structural modifications exceed the level of modification indicated below, a discretionary application is required. SF SF			modification of 4'.
Total length of modified pier and grade beam foundation Area of first floor supported by pier and grade beam foundation 23% Ummary oof Modification (15%) sterior Wall Modification (65%) oor Framing Modification (10%) Dundation Modification (10%) Area of first floor supported by pier and grade beam foundation SF Modification of an existing foundation to enable addition is included, but not a separate addition foundation. 23% SF For Planning Staff Only If structural modifications exceed the level of modification indicated below, a discretionary application is required. Gov Framing Modification (10%) 2%	Total length of existing pier and grade beam foundation		LF
Area of first floor supported by pier and grade beam foundation SF addition is included, but not a separate addition foundation SF addition is included, but not a separate addition foundation SF addition is included, but not a separate addition foundation SF addition is included, but not a separate addition foundation SF addition is included, but not a separate addition foundation SF addition is included, but not a separate addition foundation SF addition is included, but not a separate addition foundation SF addition is included, but not a separate addition foundation addition is included, but not a separate addition foundation addition is included, but not a separate addition foundation addition is included, but not a separate addition foundation addition is included, but not a separate addition addition is i			LF Modification of an existing foundation to enable an
Image: state of the structural modification (15%) Image: state of the structural modification state of the structural modification state of the structural modification structur			DF I
boof Modification (15%) 15% If structural modifications exceed the level of modification indicated below, a discretionary application is required. oor Framing Modification (10%) 1% oundation Modification (10%) 2%		23%	foundation.
oof Modification (15%) 15% If structural modifications exceed the level of modification indicated below, a discretionary application is required. Incore Framing Modification (10%) 1% Doundation Modification (10%) 2%			For Dianning Staff Only
xterior Wall Modification (65%) 26% application indicated below, a discretionary application is required. loor Framing Modification (10%) 1% 65% Other* oundation Modification (10%) 2% 50% No Maximum*			
xterior Wall Modification (65%)26%application is required.loor Framing Modification (10%)1%65%Other*oundation Modification (10%)2%50%No Maximum*	oot wodification (15%)	15%	
oor Framing Modification (10%) 1% 65% Other* oundation Modification (10%) 2% 50% No Maximum*			[19] 전 : : : : : : : : : : : : : : : : : :
Dundation Modification (10%) 2% 50% No Maximum*			
45% *Explain:	oundation Modification (10%)	2%	
$\frac{1}{2}$ $\frac{1}$		45%	*Explain:
APN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022			

Enter either Estimated % of exterior walls to be modified or Total length of existing exterior walls Total length of modified Exterior walls	words or symbols 100% 2409 2409 100% 100% 236 96 41%	SF	Calculation Tips Roof Calculation Notes: Measure as a flat plane, neglecting slope. Do not count deck roofs or eaves. Do count sealed decks that are part of the main roof system. On most one-story structures, the roof area will equal the floor area. <u>Exterior wais Calculation Notes:</u> Modified segments wrap around corners and have no minimum separation. Attic walls and most cripple walls do not count. To assist with measuring
or Area of Existing Roof Total Modified Area of Roof Exterior Walls Enter either Estimated % of exterior walls to be modified or Total length of existing exterior walls Total length of modified exterior walls Enter either Enter either Enter either	100% 2409 2409 100% 236 96	SF SF	Measure as a flat plane, neglecting slope. Do not count deck roofs or eaves. Do count sealed decks tha are part of the main roof system. On most one-story structures, the roof area will equal the floor area. <u>Exterior waits Calculation Notes:</u> Modified segments wrap around corners and have no minimum separation. Attic walls and most cripple
Area of Existing Roof Total Modified Area of Roof xterior Walls Enter either Estimated % of exterior walls to be modified or Total length of existing exterior walls Total length of modified exterior walls Ioors Enter either	2409 100% 236 96	SF SF	count deck roofs or eaves. Do count sealed decks that are part of the main roof system. On most one-story structures, the roof area will equal the floor area. <u>Exterior wails calculation Notes:</u> Modified segments wrap around corners and have no minimum separation. Attic walls and most cripple
Total Modified Area of Roof Exterior Walls Enter either Estimated % of exterior walls to be modified or Total length of existing exterior walls Total length of modified Total length of modified Ioors Enter either	2409 100% 236 96	SF	are part of the main roof system. On most one-story structures, the roof area will equal the floor area. <u>Exterior wails Calculation Notes:</u> Modified segments wrap around corners and have no minimum separation. Attic walls and most cripple
Exterior Walls Enter either Estimated % of exterior walls to be modified or Total length of <u>existing</u> exterior walls Total length of <u>modified</u> exterior walls	100% 236 96]]].F	structures, the roof area will equal the floor area. Exterior waiis Calculation Notes: Modified segments wrap around corners and have no minimum separation. Attic walls and most cripple
Enter either Estimated % of exterior walls to be modified or Total length of <u>existing</u> exterior walls Total length of <u>modified</u> exterior walls Cons Enter either Enter either	236 96	-]] [F	Exterior waits calculation Notes: Modified segments wrap around corners and have no minimum separation. Attic walls and most cripple
Enter either Estimated % of exterior walls to be modified or Total length of <u>existing</u> exterior walls Total length of <u>modified</u> exterior walls Ioors Enter either	96		Modified segments wrap around corners and have no minimum separation. Attic walls and most cripple
Estimated % of exterior walls to be modified or Total length of <u>existing</u> exterior walls Total length of <u>modified</u> exterior walls loors Enter either	96		Modified segments wrap around corners and have no minimum separation. Attic walls and most cripple
or Total length of <u>existing</u> exterior walls Total length of <u>modified</u> exterior walls Ioors Enter either	96	LF	minimum separation. Attic walls and most cripple
Total length of <u>existing</u> exterior walls Total length of <u>modified</u> exterior walls	96	LF	
Total length of <u>modified</u> exterior walls	96	1	wails do not count. To assist with measuring
loors Enter either		LF	modified segments in multiples of four feet, use the
Enter either	41%		wall modification calculator.
Enter either			
Estimated % of floor area to be modified			Floor Calculation Notes:
Estimated 70 of hoor area to be mounted			The modified area of each structural member extends
or		-	halfway to each adjacent member. For cross pieces
Total area of <u>existing</u> floors	2370	SF	and diagonal members, the modified area extends 16
Total area of modified floors	304	SF	inches on either side. Exclude decks and additions. Do
	13%		not use FAR guidelines.
-			
oundations			
Enter either		_	
Estimated % of foundations to be modified			Foundation Calculation Notes:
or			Modification of a perimeter and pier and grade beam
Perimeter Foundations			foundations are measured as percentage of length;
Total length of <u>existing</u> perimeter foundation	250	LF	Madification of a clab is measured as measurements of
Total length of modified perimeter foundation	58	LF	Modification of a slab is measured as percentage of
Area of first floor supported by perimeter foundation	2393	SF	area.
Slab Foundations			Where piers are added or reinforced multiply the
Total area of existing slab foundation		SF	Where piers are added or reinforced, multiply the
Total area of modified slab foundation			number of modified piers by the average spacing. Where one pier or anchor is added, count as a
Area of first floor supported by slab foundation			modification of 4'.
Pier and Grade Beam Foundation			modification of 4.
Total length of <u>existing</u> pier and grade beam foundation		LF	Modification of an existing foundation to enable an
Total length of <u>modified</u> pier and grade beam foundation		LF	addition is included, but not a separate addition
Area of first floor supported by pier and grade beam foundation		SF I	foundation.
	23%		
Summary		11	For Planning Staff Only
Roof Modification (15%)	15%		If structural modifications exceed the level of
	1370		modification indicated below, a discretionary
xterior Wall Modification (65%)	26%	-	application is required.
loor Framing Modification (10%)	1%		☐ 65% ☐ Other*
oundation Modification (10%)	2%		☐ 50% ☐ No Maximum*
	45%		*Explain:
APN: 04208106 Owner Name: Bill Kennedy			Date: 10/3/2022

Summary or Total area of modified floors 2370 304 304 Total area of modified floors 304 13% 304 Series and algonal members, the modified area extends 13% 13% Secondations 13% Foundations 13% Foundations 56 Total area of modified person 250 Total length of modified person 250 Total length of modified permeter foundation 250 Total area of modified permeter foundation 250 Total area of modified bean foundation 250 Total area of modified per and grade bean foundation 250 Total area of modified per and grade beam foundation 250 Total length of modified per and grade beam foundation 250 Total length of modified per and grade beam foundation 256 Modification (15%) 256 <	For spreadsheet guidelines, click the index tab (below page margin	at bottom of t	his pa	age) called "User Guide".	
Enter either words of and and and an and an and and and and and an	Roof			Colouistion Tine	
Estimated % of root to be modified 100% Area of Existing Roof 2409 Total Modified Area of Roof 2409 Stretrior Walls 56 Enter either 100% Estimated % of foor area to be modified modified segments wrap around corners and have minum segaration motion estors to the modified error walls to be modified Total length of desting exterior walls 236 Or 0 Total length of desting exterior walls 236 Or 0 Total length of desting exterior walls 236 Or 0 Total length of desting floors 230 Total area of modified 0 Total area of modified 0 Total area of modified 0 Or 0 Total area of modified 0 Total area of desting shore 2300 Total area of desting throos 0 Area of first floor supported by pair meter foundation 230 Total area of essiting burondation				Calculation Tips	
or. Area of fixing Reof 2269 Stream Total Modified Area of Ricol 2269 Stream Stream Undekt roots or seases. Do count sealed deck structures, the roof area will equal the floor area. Stream Stream Stream Enter either Stream Stream Stream Or Or Stream Stream Stream Total length of existing exterior walls 96 Uses Stream Total length of existing exterior walls 96 Uses Stream Stream Stream Stream Stream Stream Stream Str			1 5	- of Coloulation Notae	
Area of tasting floof 2209 5r Total Modified Area of Roof 2009 Total Modified Area of Roof 2009 Streter of Malls approximate disciplination of system. On most cone-store structures, the roof area will equal the floor area. Extended Kong Streter of Streter		100%			
Total Modified Area of Boot 2209 Sr are part of the main roof system. On most one-stor structures, the roof area will equal the floor area. Exterior Walls Enter either Structures, the roof area will equal the floor area. Comparing C	7200	2400			
IDDBS Structures, the root area will equal the floor area. Extinct Walls Extinct Walls and most cripple Or Modified segments wrop around courses and have minimum separation. Attic walls and most cripple wills do not court. To assit with measuring the wall do not court. To assit with measuring and the sector walls. IDDDS Exter either Estimated % of foor area to be modified ether either IDDDS Enter either Estimated % of foor area to be modified addition sector area will equal the floor area. Total area of modified floors 2330 Total area of existing floors 2330 Total area of modified floors 304 Total area of existing perimeter foundation 200 Total area of existing perimeter foundation 2300 Total area of existing blo tondation		10000000000	- The Second Second		
Exterior Walls Enter either 0r 10005 10	Total Modified Area of Roof			a dia ang ang ang taong ang tao	
Enter either Externor values calculation routes: Total length of existing exterior walls 236 Up total length of existing exterior walls 96 It or total length of existing exterior walls 96 It or total length of existing floors 327 Station calculation calculation 100 It or calculation and the existing floors 327 Total area of modified floors 304 Total area of existing floors 327 Total area of existing floors 327 Total area of modified floors 304 Soundations 13% Coundations 13% Coundations 250 Fer either 13% Soundations 250 Total area of modified perimeter foundation 250 Total area of floor station to be modified 13% Soundations 238 Soundations 250 Total area of floor station to perimeter foundation 250 Total area of modified sperimeter foundation 238 Total area of modified sperimeter foundation 239 Total area of modified sperimeter foundation 238		100%	st	ructures, the roof area will equal the floor area.	
Enter either Externor values calculation routes: Total length of existing exterior walls 236 Up total length of existing exterior walls 96 It or total length of existing exterior walls 96 It or total length of existing floors 327 Station calculation calculation 100 It or calculation and the existing floors 327 Total area of modified floors 304 Total area of existing floors 327 Total area of existing floors 327 Total area of modified floors 304 Soundations 13% Coundations 13% Coundations 250 Fer either 13% Soundations 250 Total area of modified perimeter foundation 250 Total area of floor station to be modified 13% Soundations 238 Soundations 250 Total area of floor station to perimeter foundation 250 Total area of modified sperimeter foundation 238 Total area of modified sperimeter foundation 239 Total area of modified sperimeter foundation 238	Exterior Walls				
Extinates or exterior wails to be modified or Total length of existing exterior walls 4135 <td></td> <td></td> <td></td> <td></td>					
or Will do not count. To assist with measuring. Total length of modified exterior walls 96 there either Important of modified exterior walls 96 ibors 4135 Important of modified exterior walls 96 ibors Enter either Important of modified exterior walls 96 Total area of existing floors 2370 57 Soundations 13% 13% Soundations 13% 13% Soundations 57 Foundation of a slab is measured as percentage of length; Total length of existing preimeter foundation 250 14 Total length of modified gerimeter foundation 250 14 Total length of modified perimeter foundation 250 14 Total area of gisting glab foundation 259 14 Total area of first floor supported by primeter foundation 259 14 Total length of existing plear and grade beam foundation 57 14 Total leng	Estimated % of exterior walls to be modified		10000		
Total length of modified exterior walls 235 LF Total length of modified exterior walls 96 User of modified exterior walls 96 Enter either 1 Externated % of floor area to be modified 1 Total area of modified floors 2370 Total area of modified floors 304 Statiance of modified floors 304 Total area of modified floors 304 Soundations 13% Foundation S 13% Foundation of a lab is measured a percentage of length; Total area of modified perimeter foundation 58 Total length of existing isb foundation 58 Total area of first floor supported by perimeter foundation 58 Total area of modified abs foundation 58 Total area of first floor supported by abs foundation 58 Total area of first floor supported by abs foundation 58 Total area of first floor supported by abs foundation 58 Total length of existing pier and grade beam foundation 58 Total length of existing pier and grade beam foundation 58 Total length of modified abs foundation 58 Total area of first floor supported by abs foundation 58 Area of first floor supported by absof foundation 58	or		12-025	· · · · · · · · · · · · · · · · · · ·	
Total length of modified exterior walls 96 1 display display modified segments and utilities of four feet, use in wall modification calculator. illoors Enter either Enter either Soundations 2370 Spannetser. For cross pices for all area of existing floors 304 Total area of modified floors 304 Spannetser. For cross pices for all area of existing perimeter foundation foundations are measured as percentage of endstring. Perimeter Foundations 0 foundation factor foundations. foundation factor foundation. foundation factor foundation. Total length of modified perimeter foundation 58 foundation of a slab is measured as percentage of length; Total length of modified perimeter foundation 58 foundation of a slab is measured as percentage of length; Total length of modified perimeter foundation 58 for their al area of modified slab foundation Total length of modified perimeter foundation 58 foundation is included, but not a separate addition is included, but not a separate addition is included, but not a separate addition foundation. Total length of modified perimeter foundation 238 foundation is required. Total length of modified perimeter foundation 58 foundification of a sub is measured as percentage of anchor	Total length of existing exterior walls	236			
Will modification calculator. Will modification calculator. Will modification calculator. Will modification calculator. Bior calculation Notes: Total area of existing floors Total area of modified floors Total ength of existing perimeter foundation Total length of gaisting perimeter foundation Total ength of gaisting perimeter foundation <td c<="" td=""><td></td><td></td><td></td><td></td></td>	<td></td> <td></td> <td></td> <td></td>				
Enter either Enter either Total area of existing floors 2370 Total area of modified floors 304 Total area of modified floors 304 State 304 State 13% Coundations Enter either Foundation Notes: The modified area of each structural member. For cross pieces and diagonal members, the modified area extends in notes on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In the second discrete on a perimeter foundation. In the second discrete on a second second as a percentage of a second discrete on a first floor supported by perimeter foundation. In the second discrete on a diffication of a sub sing foundation to enable an a diffication of a existing foundation to enable an a diffication of a existing foundation to enable an a diffication of a diffication of a first floor supported by perimeter foundation. In the second first floor support			, w	all modification calculator.	
Enter either Enter either Total area of existing floors 2370 Total area of modified floors 304 Total area of modified floors 304 State 304 State 13% Coundations Enter either Foundation Notes: The modified area of each structural member. For cross pieces and diagonal members, the modified area extends in notes on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In these on either side. Exclude decks and additions. In the second discrete on a perimeter foundation. In the second discrete on a second second as a percentage of a second discrete on a first floor supported by perimeter foundation. In the second discrete on a diffication of a sub sing foundation to enable an a diffication of a existing foundation to enable an a diffication of a existing foundation to enable an a diffication of a diffication of a first floor supported by perimeter foundation. In the second first floor support	Floors	λ.			
Estimated % of floor area to be modified or Total area of existing floors 13% For Planning Staff Only in a separate addition for the second the level of modification (15%) Total length of modified Beam foundation Area of first floor supported by per and grade beam foundation Area of first floor supported by per and grade beam foundation Area of first floor supported by per and grade beam foundation Area of first floor supported by per and grade beam foundation Area of first floor supported by per and grade beam foundation Area of first floor supported by per and grade beam foundation Area of first floor supported by per and grade beam foundation Area of first floor supported by per and grade beam foundation Area of first floor supported by per and grade beam foundation Area of first floor supported by pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Area of first floor suppo			FI	loor Calculation Notes:	
Total area of existing floors 2370 SF Total area of modified floors 304 SF Total area of modified floors 304 SF index on either side. Exclude decks and additions. not use FAR guidelines. Index on either side. Exclude decks and additions. not use FAR guidelines. ioundations inter either Inter either Estimated % of foundations to be modified Inter either ioundations 250 UF Modification of a perimeter foundation 250 UF Area of first floor supported by perimeter foundation 2393 SF Total area of modified perimeter foundation 2393 SF Total area of first floor supported by perimeter foundation 2393 SF Total area of first floor supported by blab foundation SF Modification of a slab is measured as percentage of area. Where one pier or anchor is added, count as a modification of first floor supported by slab foundation SF Modification of an existing foundation to enable an addition is included, but not a separate addition foon first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF Modification is included, but not a separate addition foundation. Area of fir	Control Con			he modified area of each structural member extends	
Total area of modified floors 23/0 3r inches on either side. Exclude decks and additions. not use FAR guidelines. ioundations 13% 13% for the side interval interva					
Total area of modified floors 304 SF Inches on either side. Exclude decks and additions. not use FAR guidelines. Soundations Soundations Coundation Calculation Notes: Modification of a perimeter and pier and grade bear foundation Or Modification of a perimeter and pier and grade bear foundation Total length of existing perimeter foundation Total length of modified perimeter foundation Total area of existing slab foundation Total area of modified bia foundation Total area of modified bia foundation Total area of modified pier and grade beam foundation Total area of modified pier and grade beam foundation Total area of first floor supported by slab foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation To	Total area of existing floors	2370	JT I	nd diagonal members, the modified area extends 16	
In the second s			SF in	nches on either side. Exclude decks and additions. Do	
Soundations Enter either Estimated % of foundations to be modified or Modification of a perimeter and pier and grade bear foundations are measured as percentage of length; Total length of existing perimeter foundation Stab Foundations Stab Foundation Stab Foundation Total area of modified primeter foundation Stab Foundation Total area of modified pier foundation Total area of modified giab foundation Total area of modified pier and grade beam foundation Total area of modified pier and grade beam foundation Total area of modified pier and grade beam foundation Total area of first floor supported by pier and grade beam foundation Total area of first floor supported by pier and grade beam foundation Total area of first floor supported by pier and grade beam foundation Total area of first floor supported by pier and grade beam foundation Total area of first floor supported by pier and grade beam foundation Total area of first floor supported by pier and grade beam foundation Total		13%	n	ot use FAR guidelines.	
Enter either Estimated % of foundations to be modified or Or Perimeter Foundations Total length of existing perimeter foundation 2393 Area of first floor supported by perimeter foundation Total area of existing slab foundation Total area of existing slab foundation Total area of existing perimeter foundation Total area of first floor supported by by being slab foundation Total area of existing pier and grade beam foundation Total length of gexisting pier and grade beam foundation Total length of gexisting pier and grade beam foundation Total length of gexisting pier and grade beam foundation Total length of gexisting pier and grade beam foundation Total length of gexisting pier and grade beam foundation Total length of gexisting pier and grade beam foundation Total length of gexisting pier and grade beam foundation Total length of gexisting pier and grade beam foundation Total length of first floor supported by pier and grade beam foundation Total length of gexisting and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam					
Estimated % of foundations to be modified or Or Total length of existing perimeter foundation 250 Total length of modified perimeter foundation 2393 Stab Foundations Modification of a slab is measured as percentage of length; Total length of existing berimeter foundation 2393 Stab Foundations Modification of a slab is measured as percentage of area. Total area of first floor supported by perimeter foundation 2393 Total area of modified slab foundation 55 Total length of existing pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Area of first floor supported by pier and grade beam foundation 55 Area of first floor supported by pier and grade beam foundation 55 Area of first floor supported by pier and grade beam foundation 55 Area of first floor supported by pier and grade beam foundation 55 Area of first floor supported by pier and grade beam foundation 55 Area of first floor supported by glab foundatenton 55	Foundations				
or Modification of a perimeter and pier and grade bead foundations are measured as percentage of length; Total length of modified perimeter foundation 250 Ur Total length of modified perimeter foundation 2393 Stab Foundations 2393 Total area of existing slab foundation 2393 Total area of modified perimeter foundation 2393 Total area of modified slab foundation 259 Total area of modified slab foundation 55 Total area of modified slab foundation 55 Total length of modified pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 55 Total length of modified pier and grade beam foundation 23% Starting found fication (15%) 15% Modification (15%) 15% Starter Wall Modification (15%) 26% Ioor Framing Modification (10%) 2% APN: 04208106 0wner Name: IPN: 04208106 0					
foundations Total length of existing perimeter foundation Total length of existing perimeter foundation Area of first floor supported by perimeter foundation Stab Foundations Total area of existing slab foundation Total area of existing slab foundation Total area of existing slab foundation Total area of modified slab foundation Total length of existing perimeter foundation Total area of modified slab foundation Total area of modified pier and grade beam foundation Total length of existing pier and grade beam foundation Total length of modified pier and grade beam foundation Total length of modified pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Care of Modification (15%) Total length of modified pier and grade beam foundation Area of first floor supported by pier and grade beam foundation Care of Modification (15%) Set For Planning Staff Only If structural modification seceed the level of modification indicated below, a discreti	Estimated % of foundations to be modified				
Total length of existing perimeter foundation 250 UF Total length of existing perimeter foundation 58 UF Area of first floor supported by perimeter foundation 2393 SF Total area of existing perimeter foundation 2393 SF Total area of existing perimeter foundation SF Where piers are added or reinforced, multiply the number of modified piers by the average spacing. Modification of a rea of first floor supported by slab foundation SF Where one pier or anchor is added, count as a modification of a slab is included, but not a separate addition Total length of modified pier and grade beam foundation UF Modification of an existing foundation to enable an addition is included, but not a separate addition foundation Area of first floor supported by pier and grade beam foundation SF For Planning Staff Only Iterrity floor supported by pier and grade beam foundation SF For Planning Staff Only Iterrity Mall Modification (15%) 15% SF SF Iso floor framing Modification (10%) 2% SF SF APRO Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xaceeds the es	or				
Total length of modified perimeter foundation 58 LF Area of first floor supported by perimeter foundation 2393 SF Stab Foundations SF Total area of existing slab foundation SF Area of first floor supported by slab foundation SF Pier and Grade Beam Foundation SF Total area of existing pier and grade beam foundation SF Total length of first floor supported by pier and grade beam foundation UF Area of first floor supported by pier and grade beam foundation SF Total length of modified pier and grade beam foundation UF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation UF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF Coof Modification (15%) 15% Ioor Framing Modification (10%) 15% Application Modification (10%) 2% xPN: 04208106 Owner Name: NPN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 Cettref tor	Perimeter Foundations			bundations are measured as percentage of length;	
Iotal length of modified perimeter foundation 58 LF Area of first floor supported by perimeter foundation 2393 Total area of existing slab foundation 5F Area of first floor supported by slab foundation 5F Area of first floor supported by slab foundation 5F Area of first floor supported by slab foundation 5F Total length of existing pier and grade beam foundation 5F Total length of modified pier and grade beam foundation 5F Area of first floor supported by pier and grade beam foundation 5F Area of first floor supported by pier and grade beam foundation 5F Area of first floor supported by pier and grade beam foundation 5F Modification (15%) 28% Summary 5F ioor Framing Modification (10%) 1% oundation Modification (10%) 2% 45% 50% Owner Name: Bill Kennedy Date: 10/3/2022 Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xaceeds the established threshold, additional permits, information, and fees may be required for my project.	Total length of existing perimeter foundation	250	LF		
Area of first floor supported by perimeter roundation 2393 SF Image: Sign Stab Foundations SF Total area of existing slab foundation SF Area of first floor supported by slab foundation SF Image: SF Where piers are added or reinforced, multiply the number of modified piers by the average spacing. Where of modified piers by the average spacing. Where one pier or anchor is added, count as a modification of 4'. Modification of existing pier and grade beam foundation IF Area of first floor supported by pier and grade beam foundation IF Area of first floor supported by pier and grade beam foundation IF Area of first floor supported by pier and grade beam foundation IF Area of first floor supported by pier and grade beam foundation IF Image: Staff Conly If Starterior Wall Modification (15%) 15% Ioor Framing Modification (10%) 2% Oundation Modification (10%) 2% IPN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and	Total length of modified perimeter foundation	58	LF	2013 프로 전 전상가 가장 전 이용 가장 가장 가장 전 것은 것은 것은 것이 가지 않는 것은 것을 가지 않는 것 같아요. 것은 것은 것이 있다. 특별 것은 것을 가 	
Total area of existing slab foundation SF Total area of modified slab foundation SF Area of first floor supported by slab foundation SF Total length of modified pier and grade beam foundation Modification of 4'. Total length of modified pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF Area of first floor supported by pier and grade beam foundation SF iummary SF ioof Modification (15%) 15% ioor Framing Modification (10%) 15% oundation Modification (10%) 2% PN:<	Area of first floor supported by perimeter foundation	2393	SF ar	rea.	
Total area of <u>modified</u> slab foundation or provide area of modified piers by the average spacing. Mumber of modified piers by the average spacing. Where one pier or anchor is added, count as a modification of 4'. Total length of <u>existing</u> pier and grade beam foundation LF Total length of <u>modified</u> pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Modification (15%) 23% Starting Modification (15%) 26% Ioor Framing Modification (10%) 1% oundation Modification (10%) 2% APN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris	Slab Foundations		1		
Total area of modified slab foundation SF Area of first floor supported by slab foundation SF Total length of existing pier and grade beam foundation LF Total length of modified piers and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation LF Summary 23% ioof Modification (15%) 15% ioor Framing Modification (10%) 26% oundation Modification (10%) 2% xPN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris	Total area of existing slab foundation				
Area of first floor supported by siab foundation output Total length of existing pier and grade beam foundation UF Area of first floor supported by pier and grade beam foundation UF Area of first floor supported by pier and grade beam foundation Date: 23% For Planning Staff Only Stummary If structural modifications exceed the level of modification indicated below, a discretionary application is required. Istructural Modification (15%) 26% Ioor Framing Modification (10%) 1% Oundation Modification (10%) 2% VPN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xreeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris					
Pier and Grade Beam Foundation Image: Constraint of the second secon	Area of first floor supported by slab foundation		SF W		
Total length of existing pier and grade beam foundation LF Total length of modified pier and grade beam foundation LF Area of first floor supported by pier and grade beam foundation SF Summary 23% Soof Modification (15%) 15% Iterior Wall Modification (65%) 26% Ioor Framing Modification (10%) 1% Owner Name: Bill Kennedy APN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris			m	nodification of 4'.	
Total length of modified pier and grade beam foundation UF Area of first floor supported by pier and grade beam foundation SF Summary 23% iconf Modification (15%) 15% iconf Modification (15%) 15% iconf Modification (15%) 26% iconf Modification (10%) 1% iconf Modification (10%) 1% iconf Modification (10%) 2% iconf Modification (10%) 2% iconf Modification (10%) 2% iconf Modification (10%) 0wner Name: Bill Kennedy Date: iconfigure Date: iconf Modification (10%) 0wner Name: Bill Kennedy Date: iconfigure Date: iconfigure 0wner Name: Bill Kennedy Date:			LE		
Area of first floor supported by pier and grade beam foundation SF addition is included, but not a separate addition foundation. 23% 23% For Planning Staff Only Summary 15% If structural modifications exceed the level of modification in is required. ioor Framing Modification (10%) 26% Other* oundation Modification (10%) 2% In Other* industriant floation (10%) 2% Date: 10/3/2022 xPN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris					
improve the stabilished threshold, additional permits, information, and fees may be required for my project. For Planning Staff Only improve the stabilished threshold, additional permits, information, and fees may be required for my project. If structural modification indicated below, a discretionary application indicated below, a discretionary application is required. improve the stabilished threshold, additional permits, information, and fees may be required for my project. Improve the stabilished threshold, additional permits, information, and fees may be required for my project.			SF ad		
For Planning Staff Only isoof Modification (15%) 15% ixterior Wall Modification (65%) 26% loor Framing Modification (10%) 1% oundation Modification (10%) 2% 45% 0 Other* Solow No Maximum* *Explain:	Charles and the second s	23%	fo	oundation.	
ioof Modification (15%) 15% xterior Wall Modification (65%) 26% loor Framing Modification (10%) 1% oundation Modification (10%) 2% 45% Other* S0% No Maximum* *Explain: * vertify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris		2370	」 ∟ 1		
xterior Wall Modification (65%) loor Framing Modification (10%) oundation Modification (10%) 0undation Modification (10%) 2% 45% modification indicated below, a discretionary application is required. 0 modification indicated below, a discretionary application is required. 0 modification indicated below, a discretionary application is required. 0 modification indicated below, a discretionary application is required. 0 modification indicated below, a discretionary application is required. 0 modification indicated below, a discretionary application is required. 0 0 modification (10%) modification is required. 0 0 0 0 0 0 0 0 0 0 0 modification indicated below, a discretionary application is required. modification (10%) modification (10%) 0	Summary		IL	For Planning Staff Only	
xterior Wall Modification (65%) 26% loor Framing Modification (10%) 1% oundation Modification (10%) 2% 45% 0 Other* 50% No Maximum* *Explain:	Roof Modification (15%)	15%	lf	structural modifications exceed the level of	
loor Framing Modification (10%) 1% oundation Modification (10%) 2% 45% 0 ther* 90% 0 ther* 10% 1% 10% 2% 10% 2% 10% 1% 10% 0 ther* 10% 1% 10% 2% 10% 1% 10% 0 ther*				· 가는 것은 가슴 것은 것 같은 것은 것을 같은 것을 가지 않는 것은 것이 가지 않는 것은 것이 있다. 그것은 것이 있는 것이 같이 있다.	
oundation Modification (10%) 2% 50% No Maximum* 45% *Explain: *Explain: NPN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris	xterior Wall Modification (65%)	26%	ap	pplication is required.	
45% *Explain: APN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris	loor Framing Modification (10%)	1%] 65% 🗌 Other*	
APN: 04208106 Owner Name: Bill Kennedy Date: 10/3/2022 certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris	oundation Modification (10%)	2%		50% 🗌 No Maximum*	
certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris		45%	*	Explain:	
certify that this worksheet is accurate. I understand that when the worksheet is evaluated as part of the application review, if the proposed wo xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris	ADN. 04208106 Bill Keppedy		5	ate: 10/3/2022	
xceeds the established threshold, additional permits, information, and fees may be required for my project. Edward "Toby" Morris	APN: 04200100 Owner Name: Bill Kennedy		D	ate: 10/3/2022	
Edward "Toby" Morris	I certify that this worksheet is accurate. I understand that when the work	ksheet is evalua	ted as	part of the application review, if the proposed work	
Edward "Toby" Morris	exceeds the established threshold, additional permits, information, and f	fees may be req	uired f	for my project.	
				Tankar Tanan Mu	
	Call		Edw	ard "Toby" Morris	
ignature Print Name	Signature	_	Print	Name	

Modification Worksheet

★ (¹⁰ C-24585 181 SEACLIFF DRIVE 181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06 SANTA CRUZ COUNTY PERMIT: 211129

ED ARC

km

kerman morris architects ur

139 Noe Street San Francisco, CA 94114 415 749 0302

Revisions

ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)

BILL AND ALYCIA KENNEDY


NOTICE

These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.

The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.

These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.


All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.

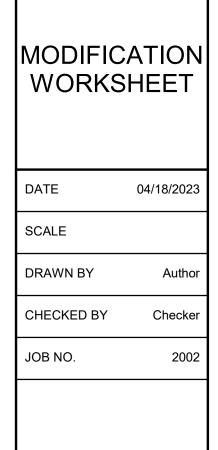

G1.12





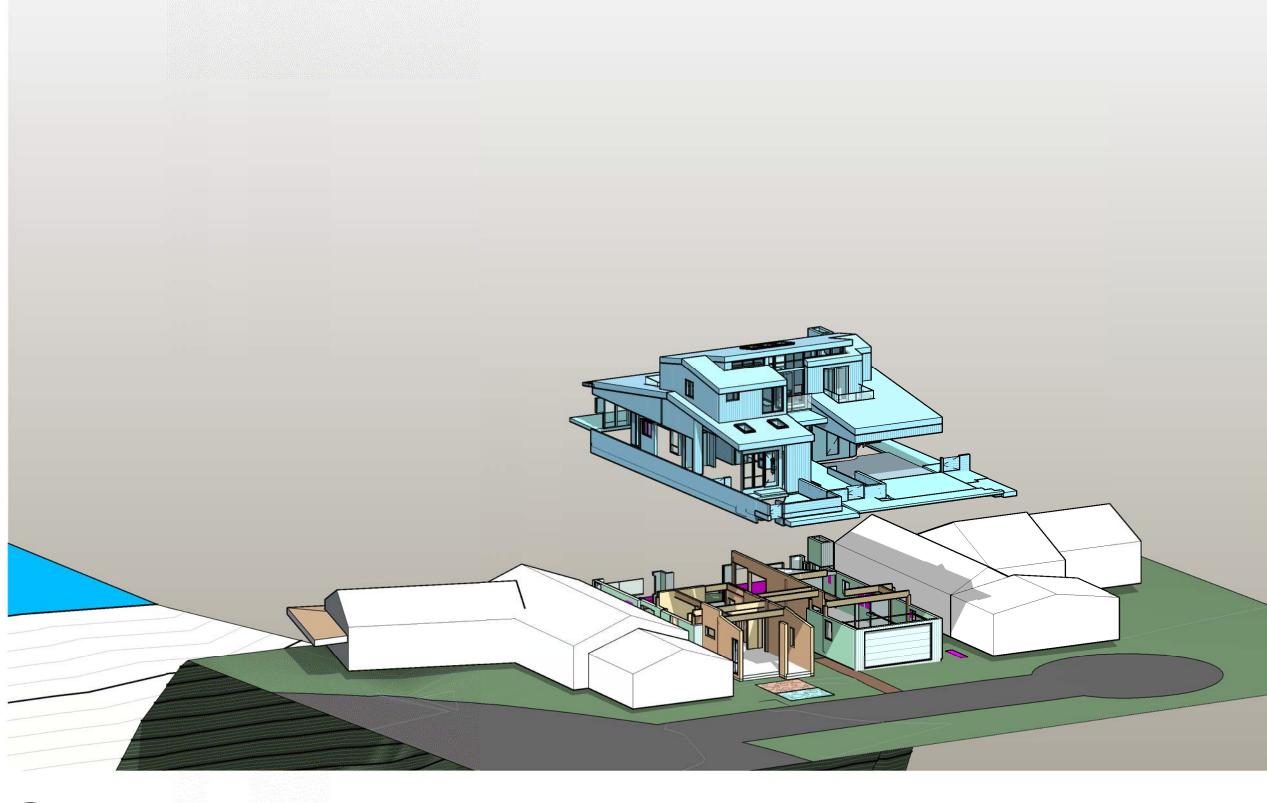


MODIFICATION AXONS - STEP 4 4









MODIFICATION AXONS - STEP 1 - EXISTING HOUSE

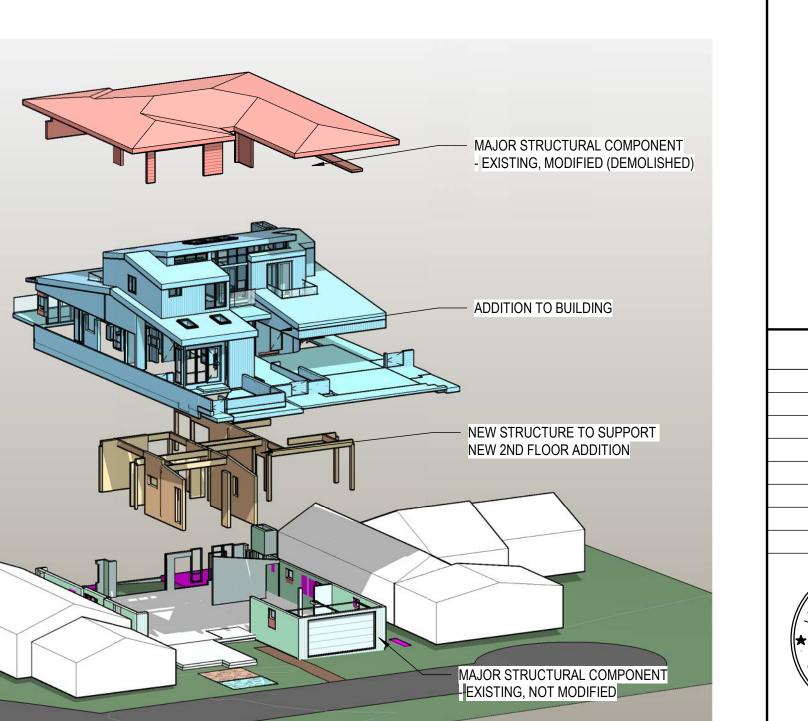

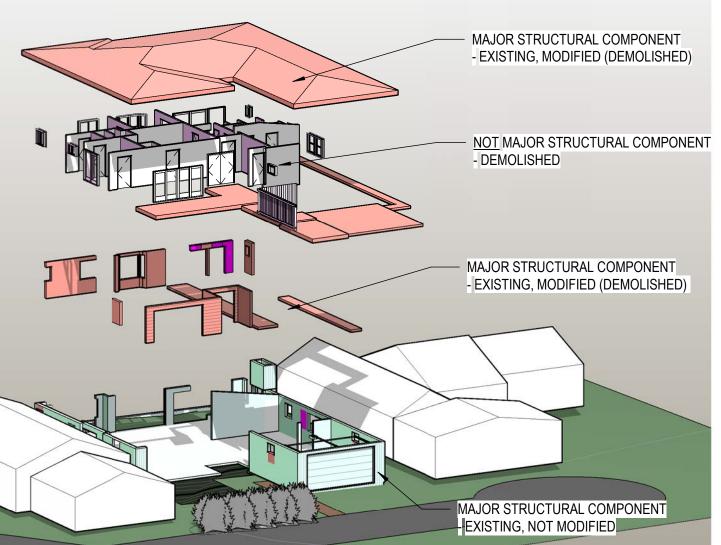

ľ		
	kerman morris architects up	
	139 Noe Street San Francisco, CA 94114 415 749 0302 Revisions	
	+ + + + + + + + + +	
	181 SEACLIFF DRIVE 181 SEACLIFF DRIVE	
	APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06	
	SANTA CRUZ COUNTY PERMIT: 211129	
NT	ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)	
	BILL AND ALYCIA KENNEDY	
	NOTICE These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.	
	The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.	
	These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.	
	All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.	
	MODIFICATION AXONS	
	DATE 04/18/2023	
	SCALE	
	DRAWN BY Author CHECKED BY Checker	
	JOB NO. 2002	
	G1.13	




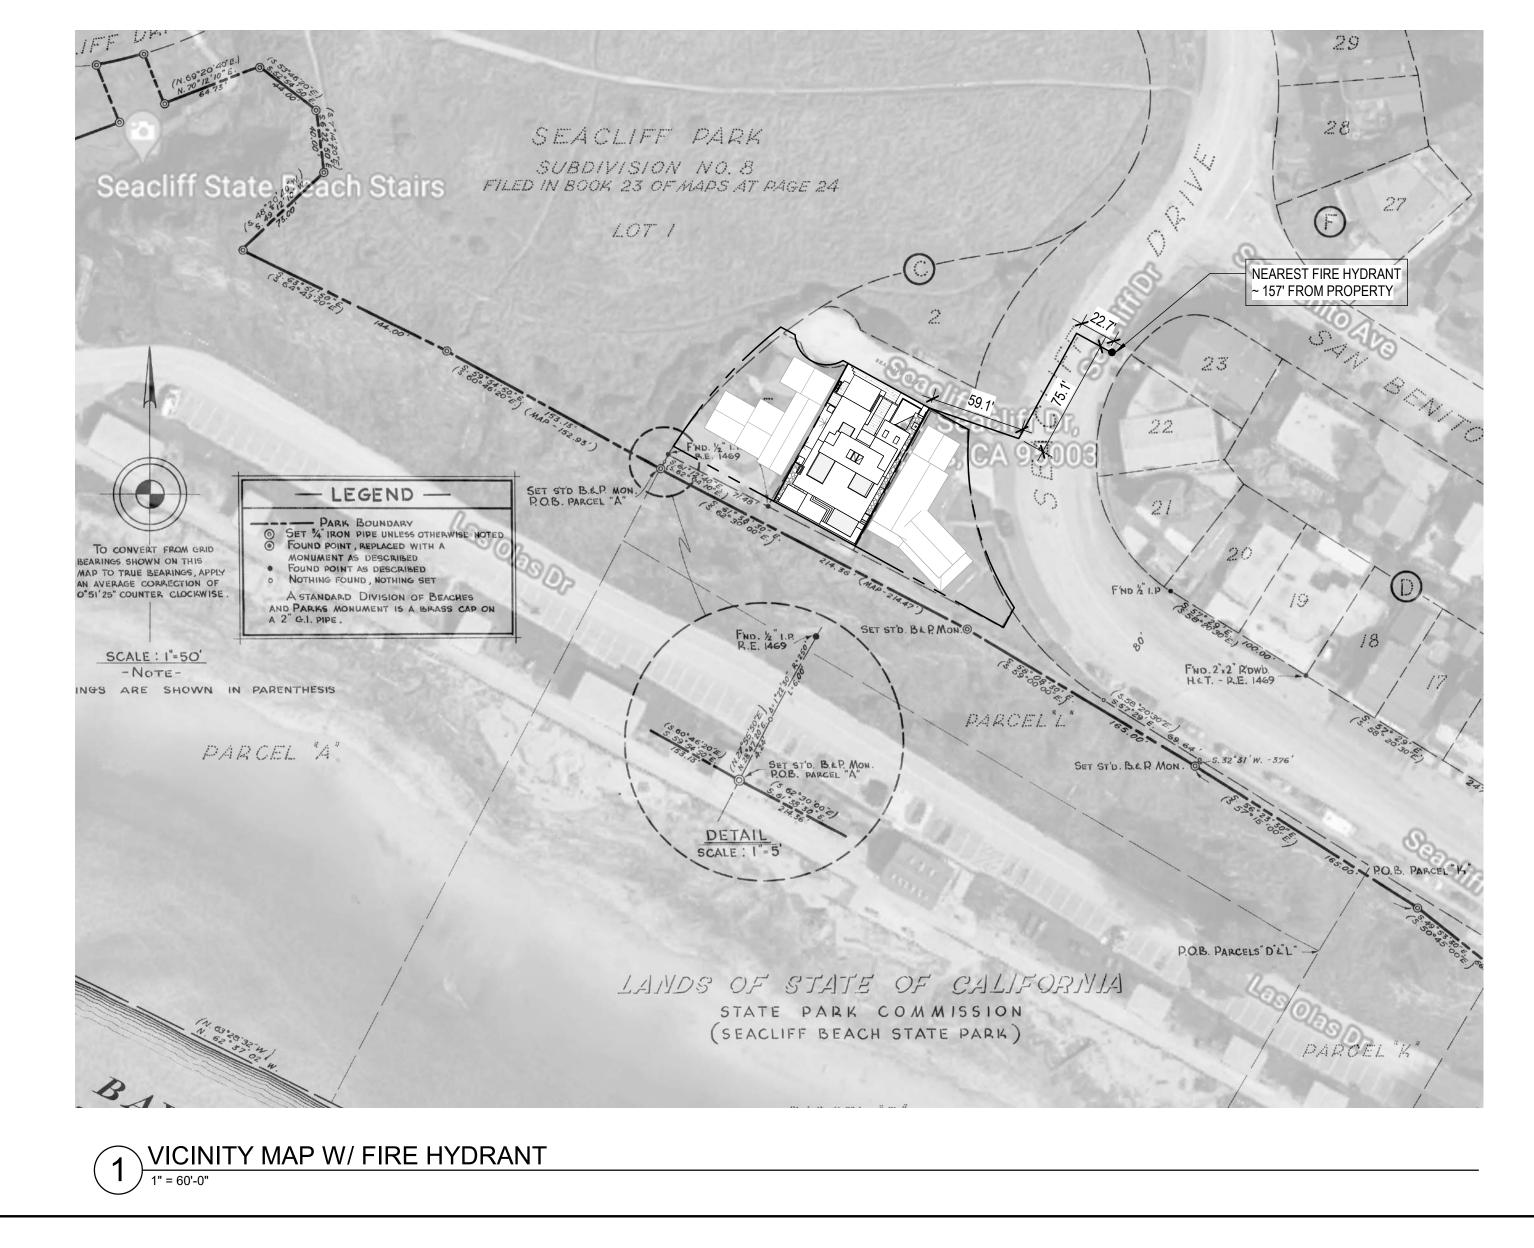


							km
							kerman morris architects up
							139 Noe Street
							San Francisco, CA 94114 415 749 0302
							Revisions
							Revisions
							CHAP DAVISAD
							★ C-24585
							of the contract
							Prof CALIFOR
			ING	CODE A	NALYSIS*		
* SEE G0.06.1 AND G0.06.2 FOI	Code Ref. (CBC,		Min/Ma	-		* SEE G0.06.1 AND G0.06.2 FOR ADDITIONAL INFORMATION	
Description	U.O.N.)	Allowable	X	Existing	Proposed	Comments	181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 API
GENERAL PROJECT INFORMATION	602.1			TYPE V-B	TYPE V-B	Wood columns, shear walls, and wood floor framing, non sprinklered	042-081-06
OCCUPANCY CLASSIFICATION	310.5	R-3		R-3	R-3	1 Dwelling Unit + 1 Accessory Dwelling Unit or less allowed.	SANTA CRUZ COUN PERMIT: 211129
HEIGHT AND AREA LIMITATIONS				1			ADDITION AND ALTERATI
BUILDING HEIGHT BUILDING STORIES ABOVE GRADE	Table 504.3 Table 504.4	40'-0" 3 STORIES	Max. Max.	10'-0" 2 STORIES	21'-6" 2 STORIES		TO SINGLE-FAMILY RESIDENCE AND ADDITIO
BUILDING AREA AT LARGEST STORY* TOTAL BUILDING AREA	Table 506.2	Unlimited (UL) Unlimited (UL)	Max. Max.	2,393 SF 2,393 SF	2,699 SF 3,352 SF	*Area for 1st Floor (largest story) shown	OF ACCESSORY DWELLII UNIT (ADU)
				2,000 01	5,552 01		
FIRE RESISTANCE RATING REQUIREMENTS PRIMARY STRUCTURAL FRAME	Table 601	0 HR	Min.	0 HR	0 HR		BILL AND ALYCIA KENNEI
BEARING WALLS - EXTERIOR BEARING WALLS - INTERIOR	Table 601 Table 601	0 HR* 0 HR	Min. Min.	0 HR 0 HR	0 HR* 0 HR	*1 HR WHERE FSD <5'	NOTICE These drawings and specification
NON-BEARING WALLS - EXTERIOR1WHERE FIRE SEPARATION DISTANCE (FSD) < 5'	Table 601 Table 602	Varies - See below 1 HR	Min.	0 HR 0 HR	Varies - See below 1 HR		are the property and copyright of Kerman/Morris Architects and sh
2 WHERE FSD >/= 5'	Exception 'i' Table 602	0 HR		0 HR	0 HR		not be used on any other work e by written agreement with Kerman/Morris Architects.
NON-BEARING WALLS - INTERIOR	Table 601	0 HR		0 HR	0 HR		The Contractor shall verify all ex
FLOOR CONSTRUCTION AND ASSOCIATED SECONDARY MEMBERS	Table 601 and 510.4	0 HR	Min.	0 HR	0 HR		conditions. Written dimensions to preference over scaled dimension
ROOF CONSTRUCTION AND ASSOCIATED SECONDARY MEMBERS	Table 601	0 HR	Min.	0 HR	0 HR		and shall be verified on the proje site. Any discrepancy shall be br to the attention of Kerman Morri
FIRE AND SMOKE PROTECTION FEATURES							Architects prior to the commence of any work.
MAXIMUM AREA OF EXTERIOR WALL OPENINGS AND PROTECTION REQUIRED							These drawings are an industry standards builders set for buildir
 1 WHERE FIRE SEPARATION DISTANCE (FSD) < 3' 2 WHERE 3' <!--= FSD <5'</li--> 	Table 705.8 Table 705.8,	Not Permitted 25% UNPROTECTED OR	Max. Max.		N/A <25% - See Elevations		permit and to assist the contract construction. The drawings show
	footnote 'd'	PROTECTED OPENINGS IN R-3 OCCUPANCY					limited and only representative/ty details.
3 WHERE 5' = FSD <30'</td <td>Table 705.8, footnote 'f'</td> <td>NO LIMIT FOR R-3 OCCUPANCY</td> <td>Max.</td> <td></td> <td>See Elevations</td> <td></td> <td>All attachments, connections, fastenings,etc, are to be properly</td>	Table 705.8, footnote 'f'	NO LIMIT FOR R-3 OCCUPANCY	Max.		See Elevations		All attachments, connections, fastenings,etc, are to be properly
8 WHERE FSD >/= 30'	Table 705.8	No Limit			See Elevations		secured in conformance with be practice, and the Contractor sha responsible for providing and ins
PARAPETS	705.11 Exception 5	NOT REQUIRED		NOT PROVIDED	NOT PROVIDED	Non-combustible roof deck and gypsum board required at underside of sheating for min. 4'	them.
FIRE PROTECTION SYSTEMS							
AUTOMATIC FIRE SPRINKLER	903.3.1.2, NFPA 13R	Not Required for Buildings 3 Stories or Less		None Existing	None Proposed		BUILDING
FIRE ALARM AND DETECTION SYSTEM	907 and NFPA 72					Smoke Alarms are installed in each room and hallway outside bedrooms	
							NOTES &
MEANS OF EGRESS & OCCUPANT LOAD	1005.3.1 &	36"	Min.		36" Stairs Provided	The greater of 0.3"/Occupant x 5 Occupants = 1.5" per 1005.3.1 and 36" per 1011.12 for	
	1011.2	1	Min.	1	1	less than 50 occupants Single exit permitted in R-3 occupancies per Section 1006.3.3	
21 NUMBER OF EXITS	1006.2	1			Provided in Sleeping Rooms		DATE 04/18/2
21 NUMBER OF EXITS	1006.2 1030.1	Required in Sleeping Rooms per Exception 1					
							SCALE 1" = 6
21 NUMBER OF EXITS 4 EMERGENCY ESCAPE AND RESCUE 5 HOUSING ACCESSIBILITY			Min.		N/A	Not required in Single-Family Residence	SCALE 1" = 6 DRAWN BY Au
21 NUMBER OF EXITS 4 EMERGENCY ESCAPE AND RESCUE	1030.1	per Exception 1					

G2.01

 ∇

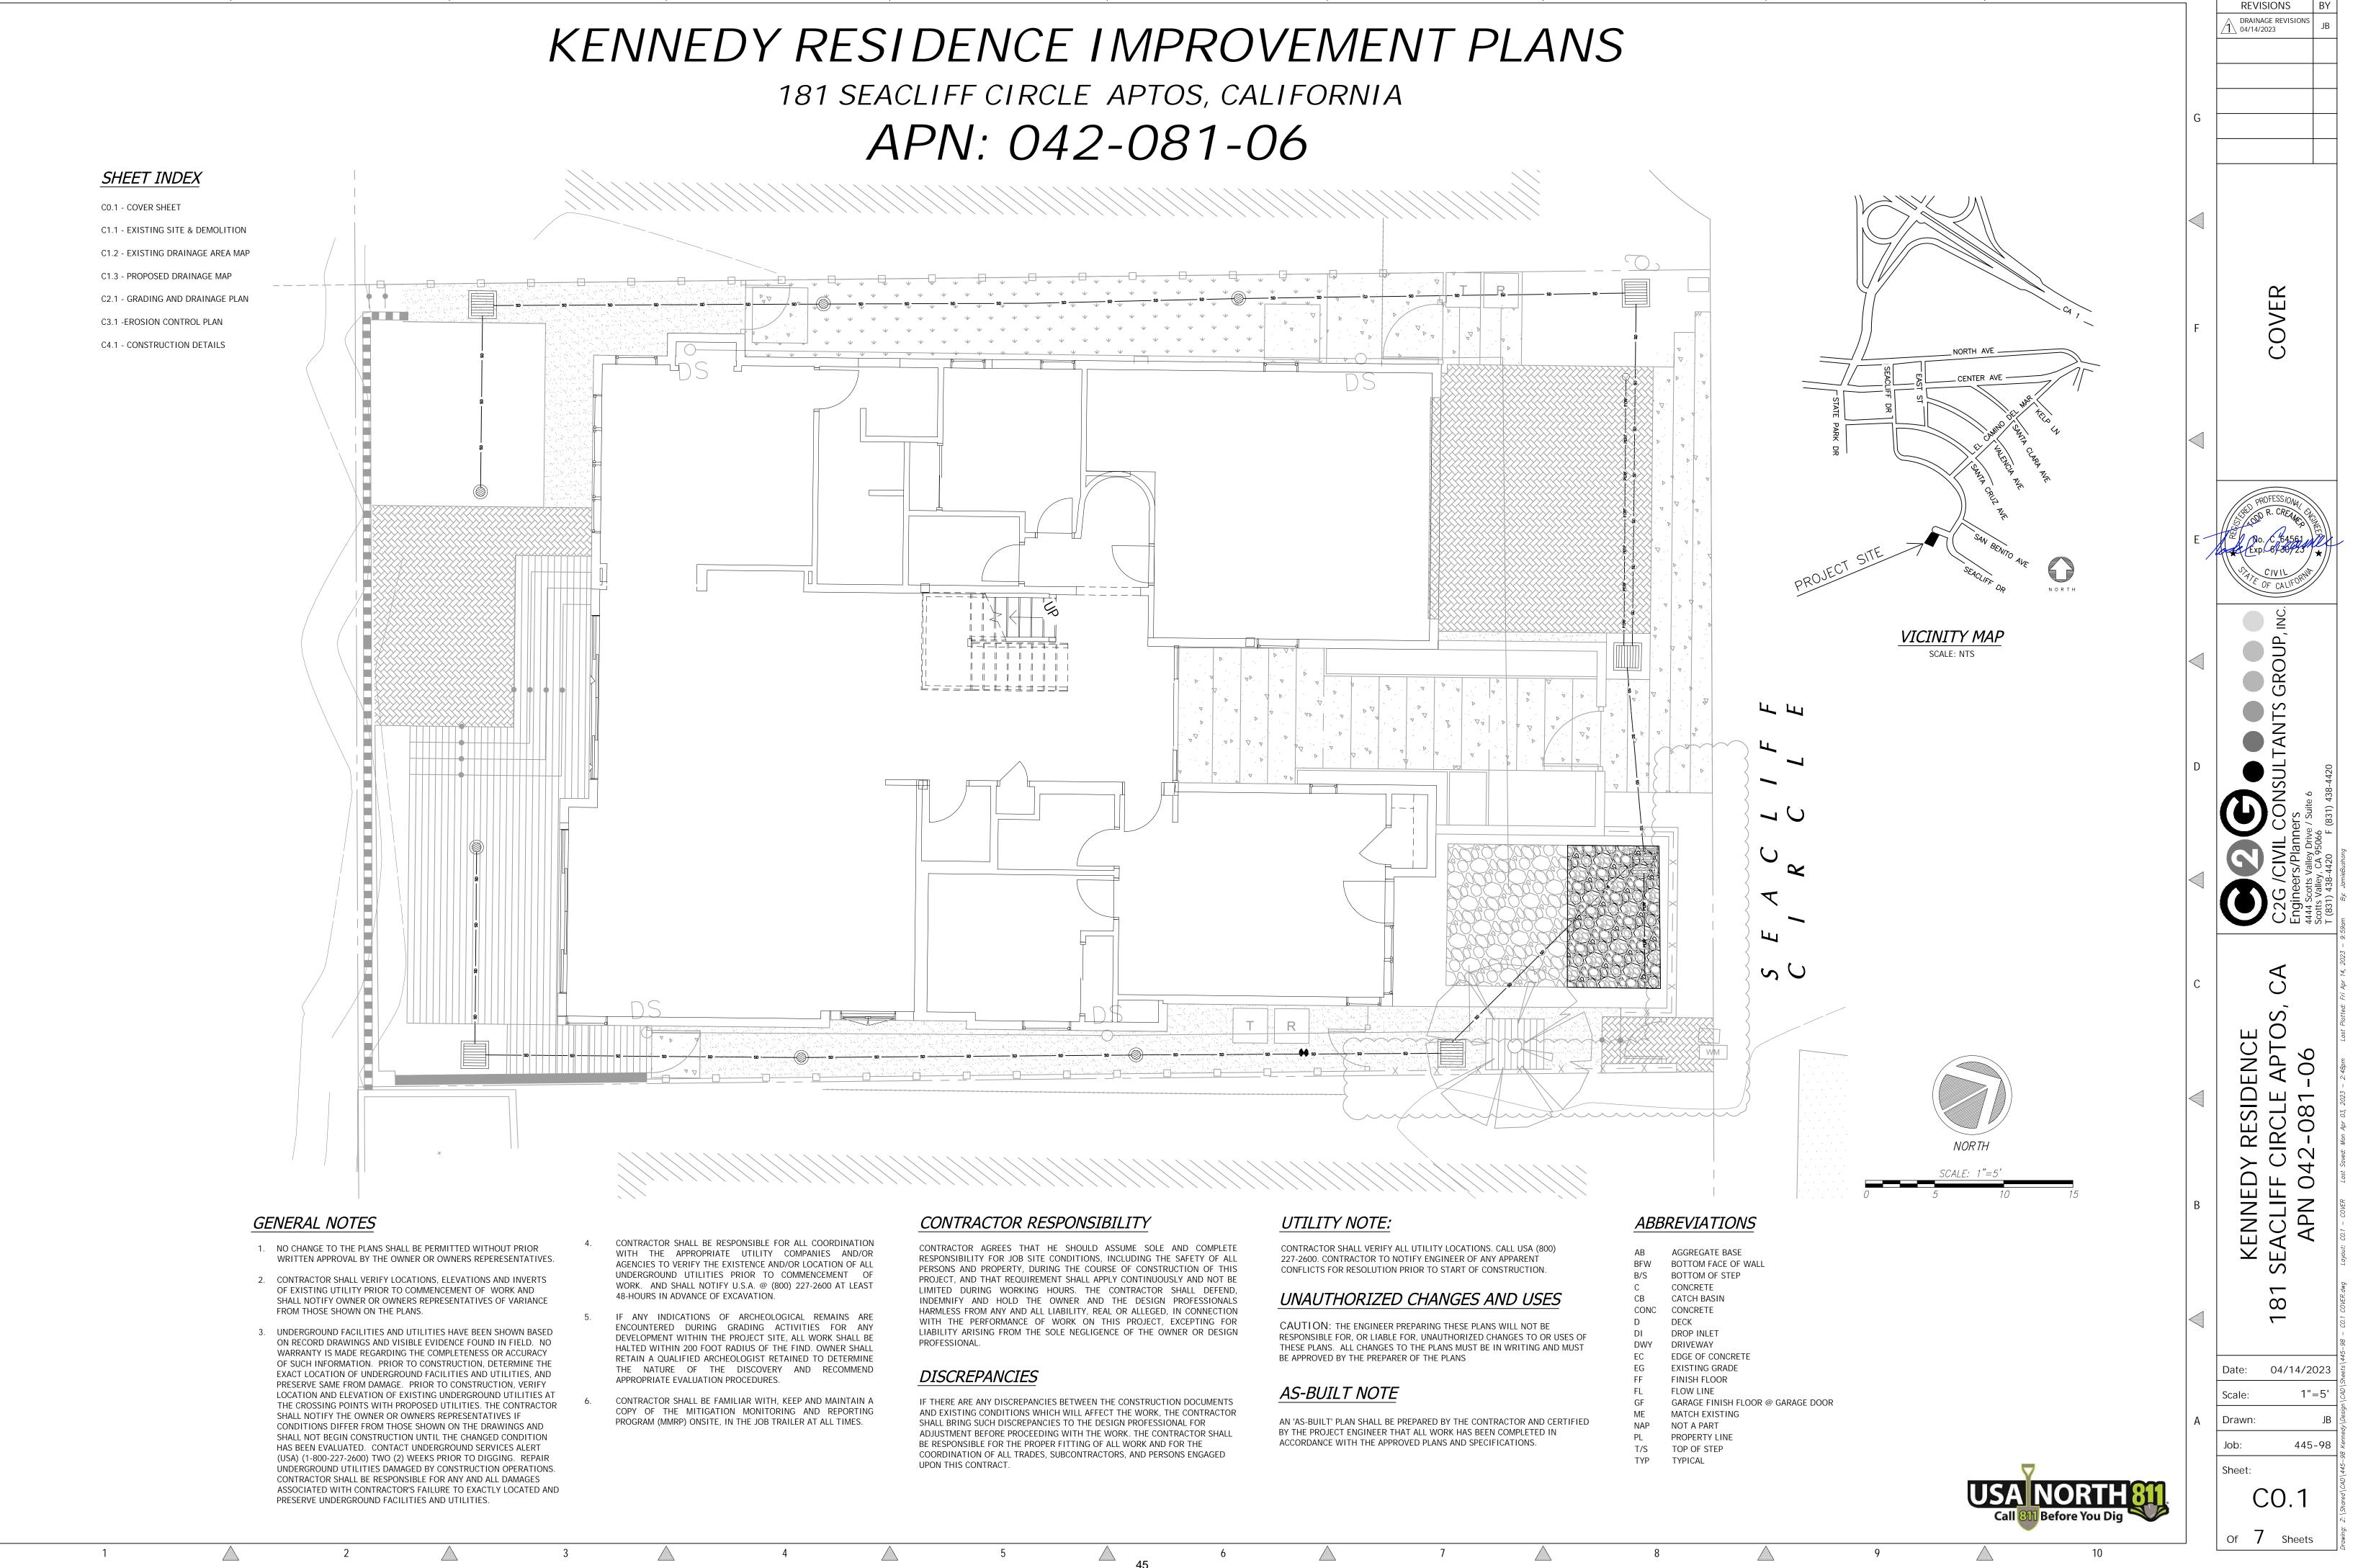

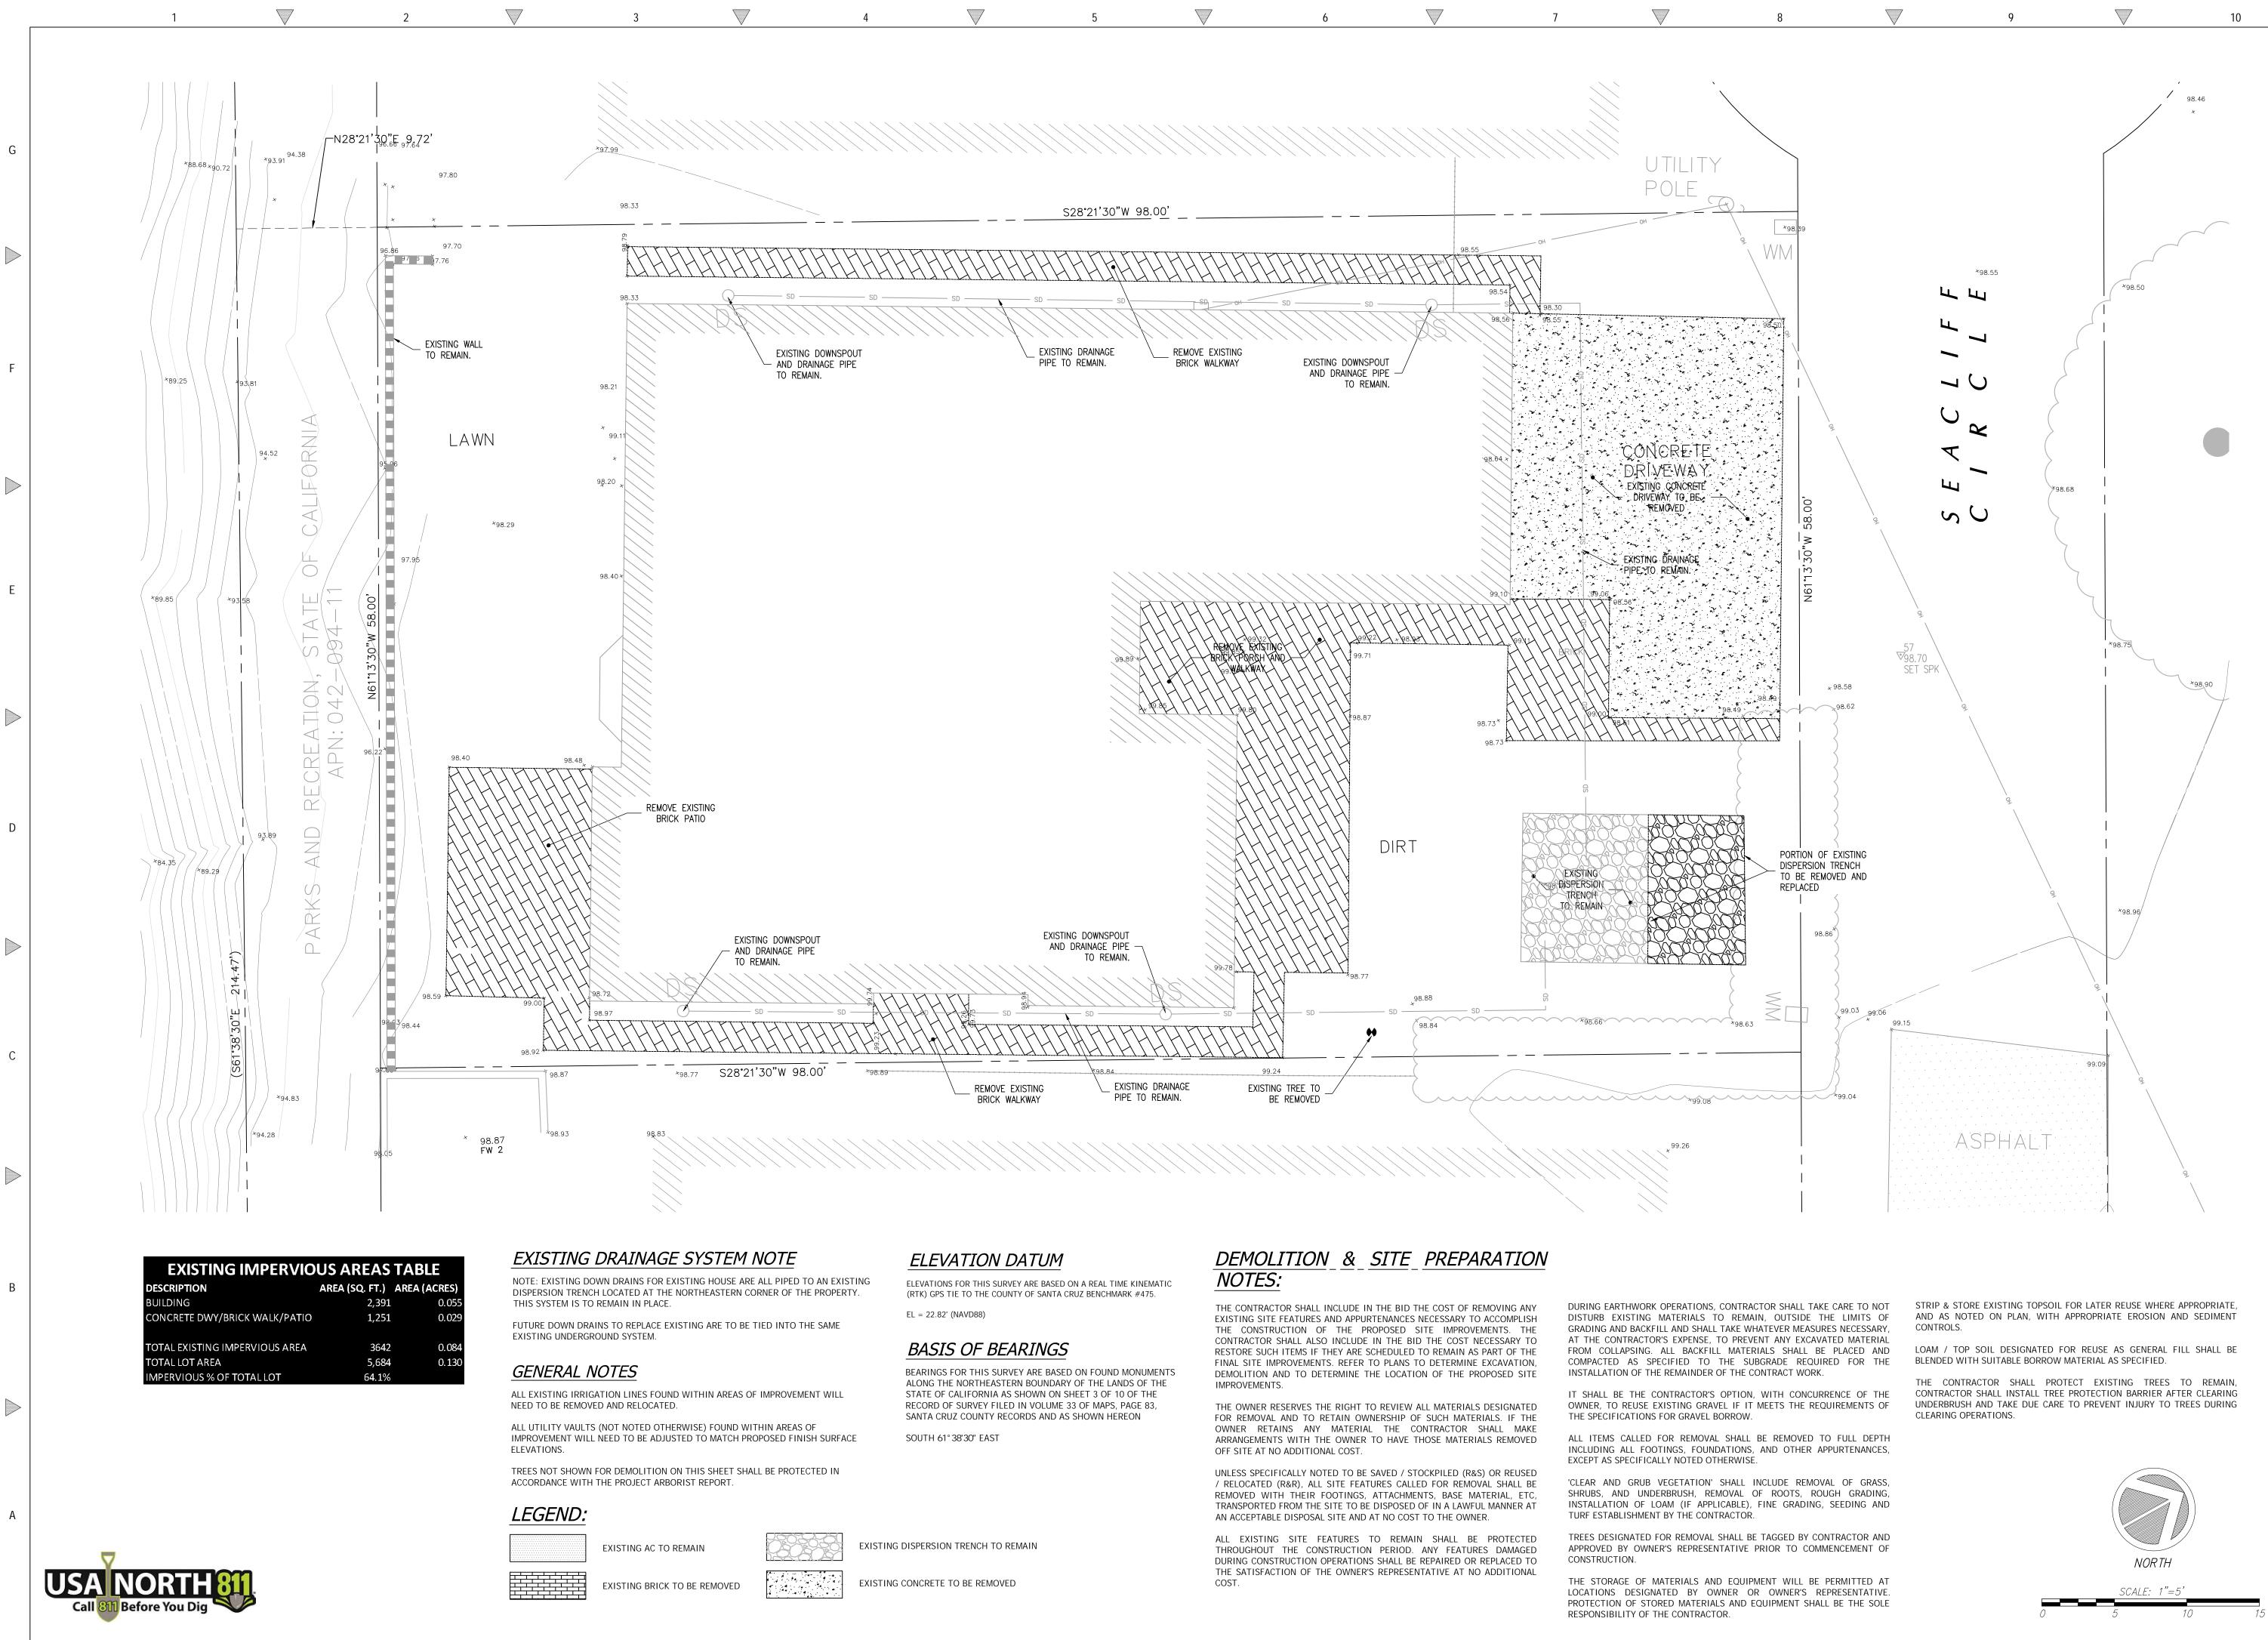

 \bigtriangleup

2

 \triangle


3

 \square

4


 \bigtriangleup

46

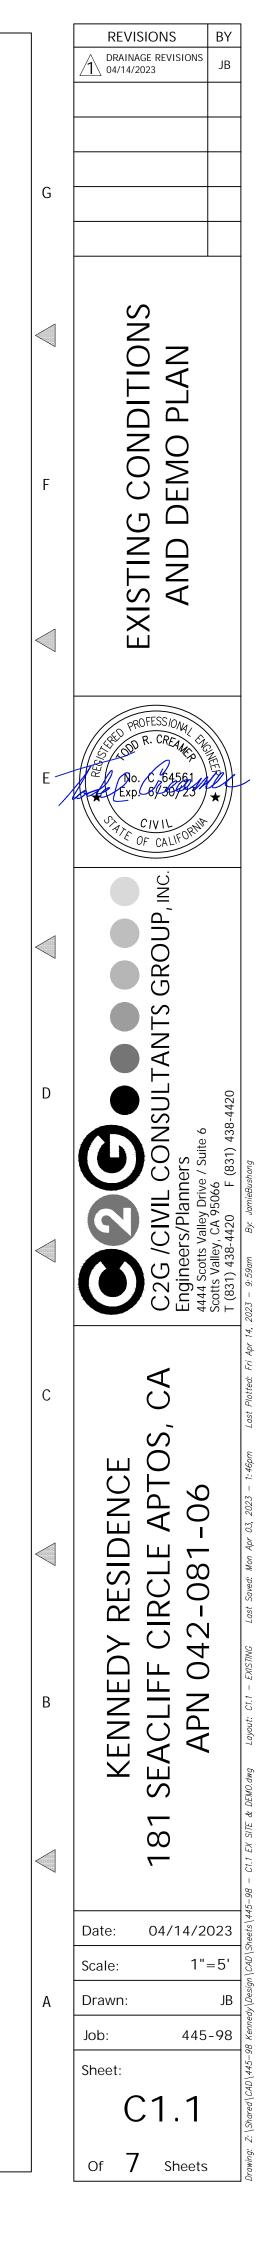


9


10

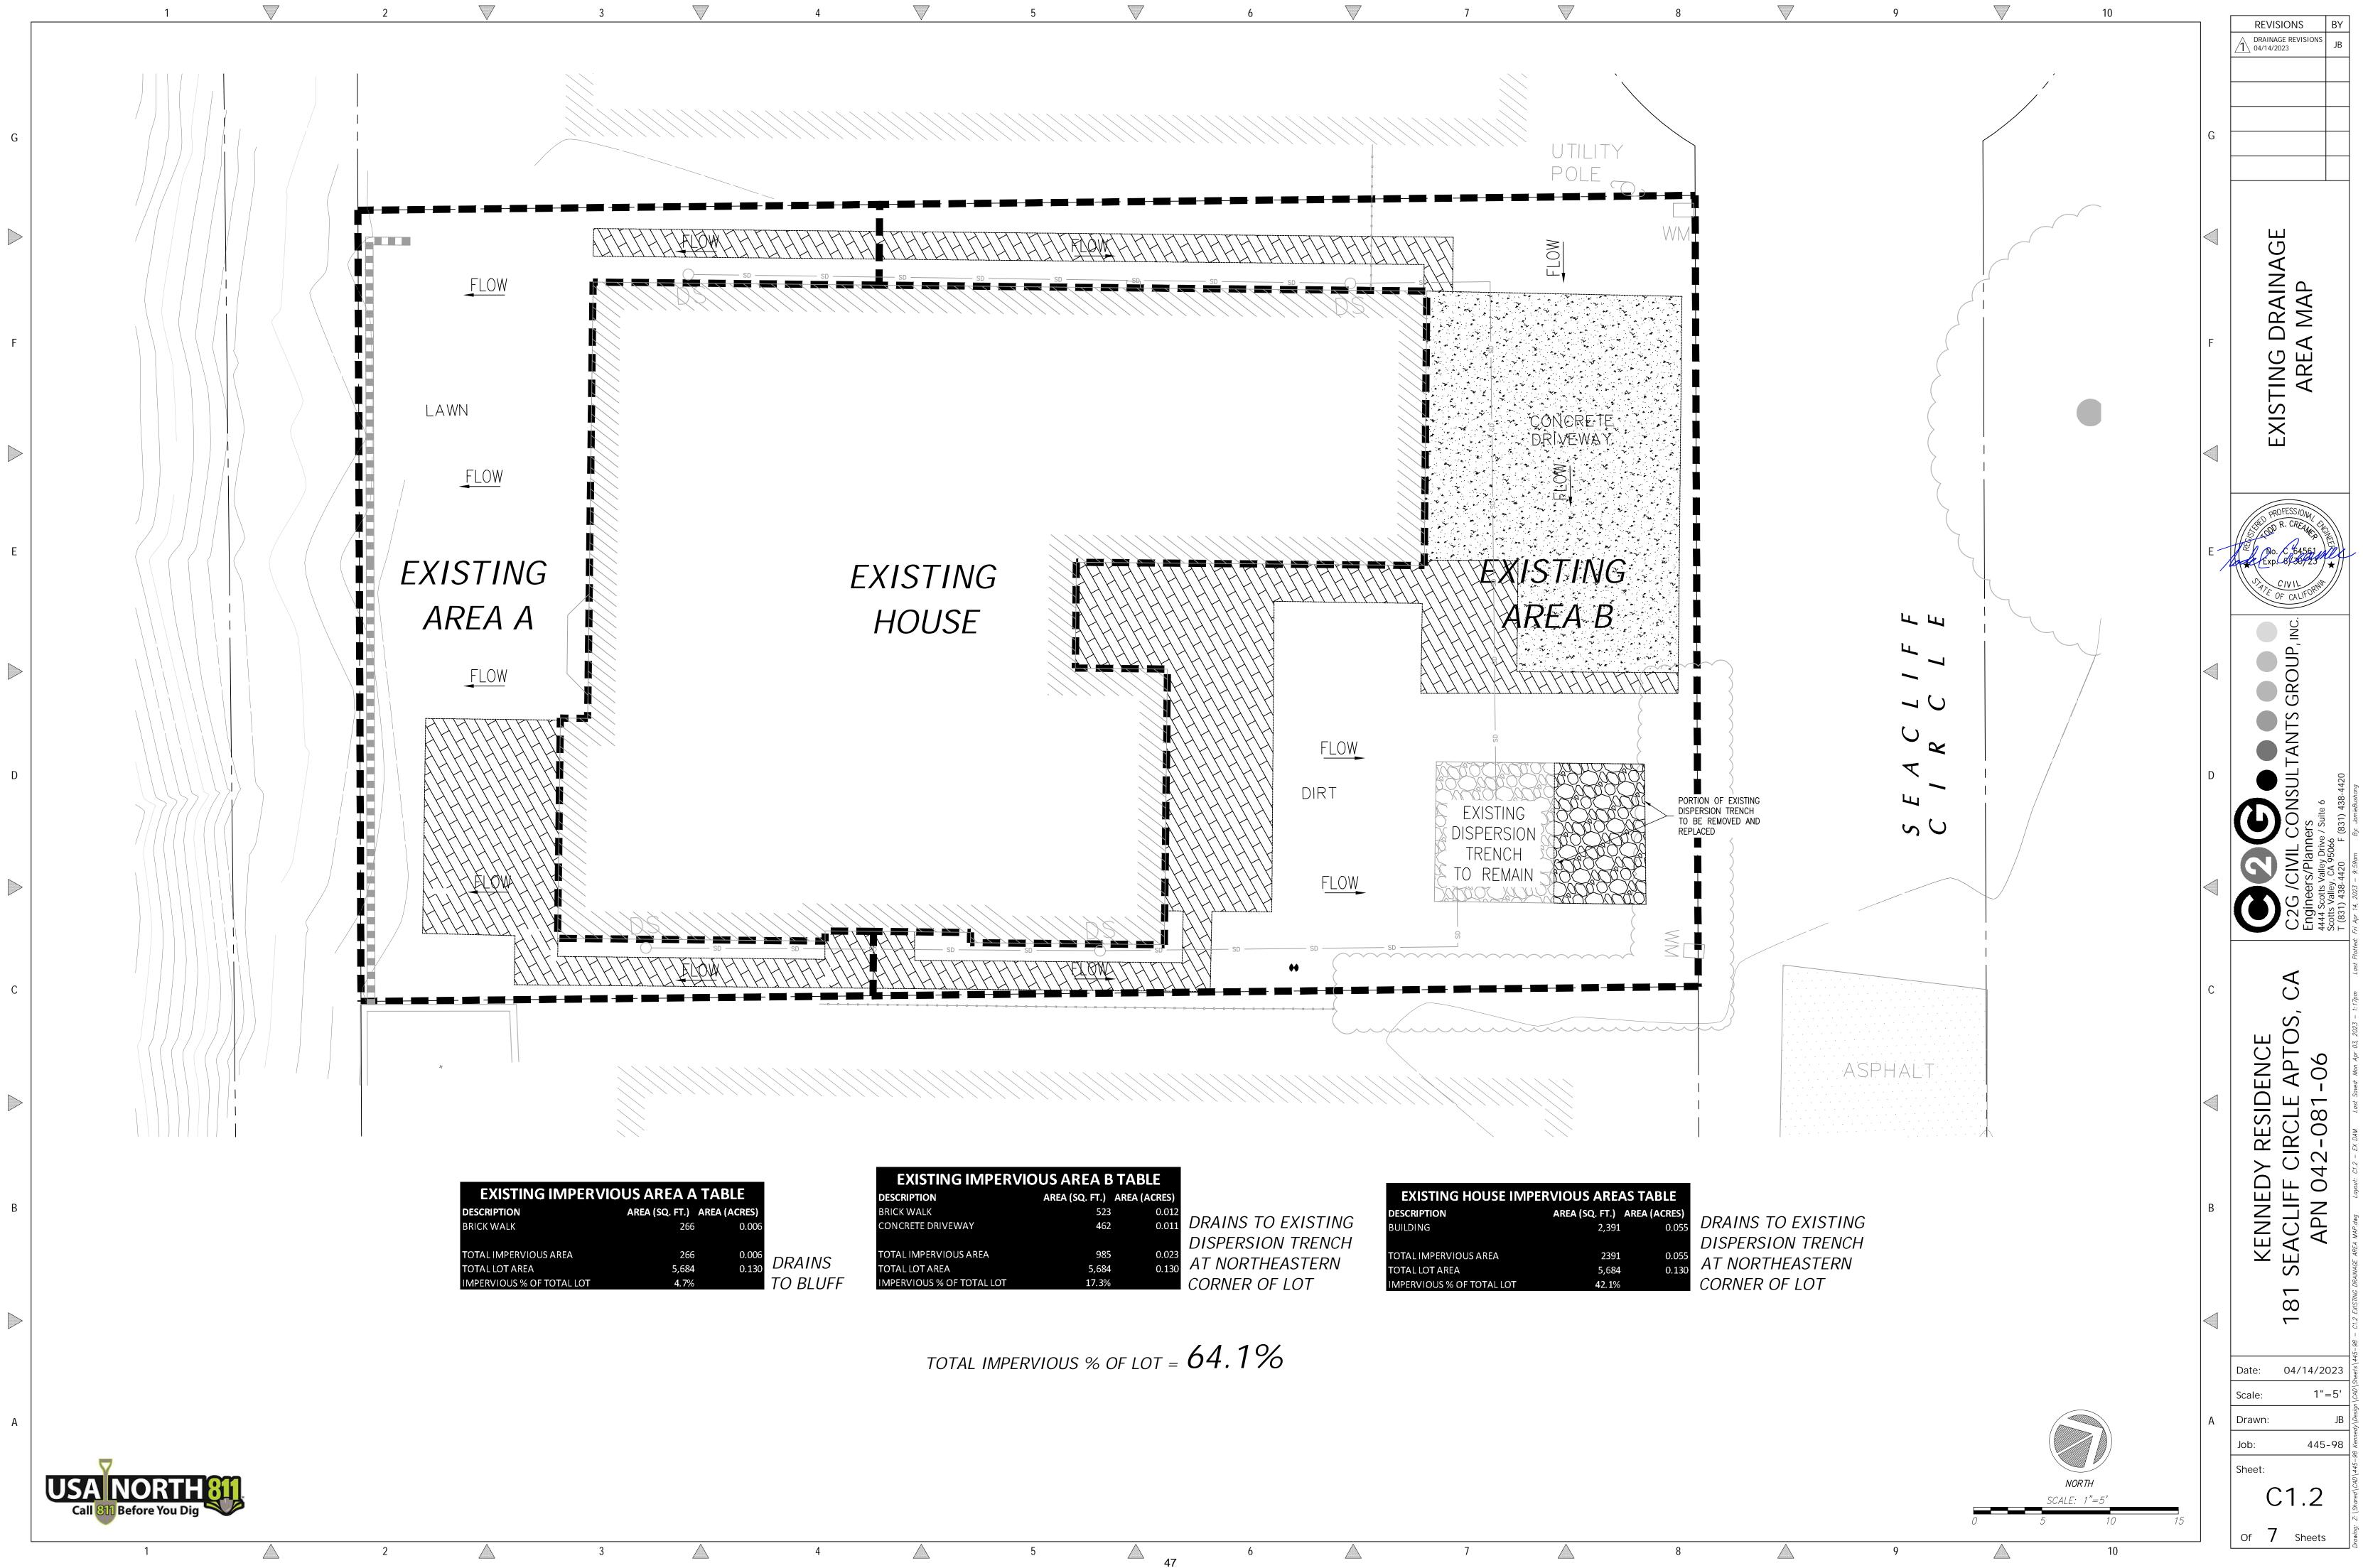


EXISTING IMPERVIOUS AREA B TABLE							
AREA (SQ. FT.)	AREA (ACRES)						
523	0.012						
462	0.011						
985	0.023						
5,684	0.130						
17.3%							
	AREA (SQ. FT.) A 523 462 985 5,684						

EXISTING HOUSE IMPER	RVIOUS AREAS T
DESCRIPTION	AREA (SQ. FT.) AREA
BUILDING	2,391
TOTAL IMPERVIOUS AREA	2391
FOTAL LOT AREA	5,684
MPERVIOUS % OF TOTAL LOT	42.1%

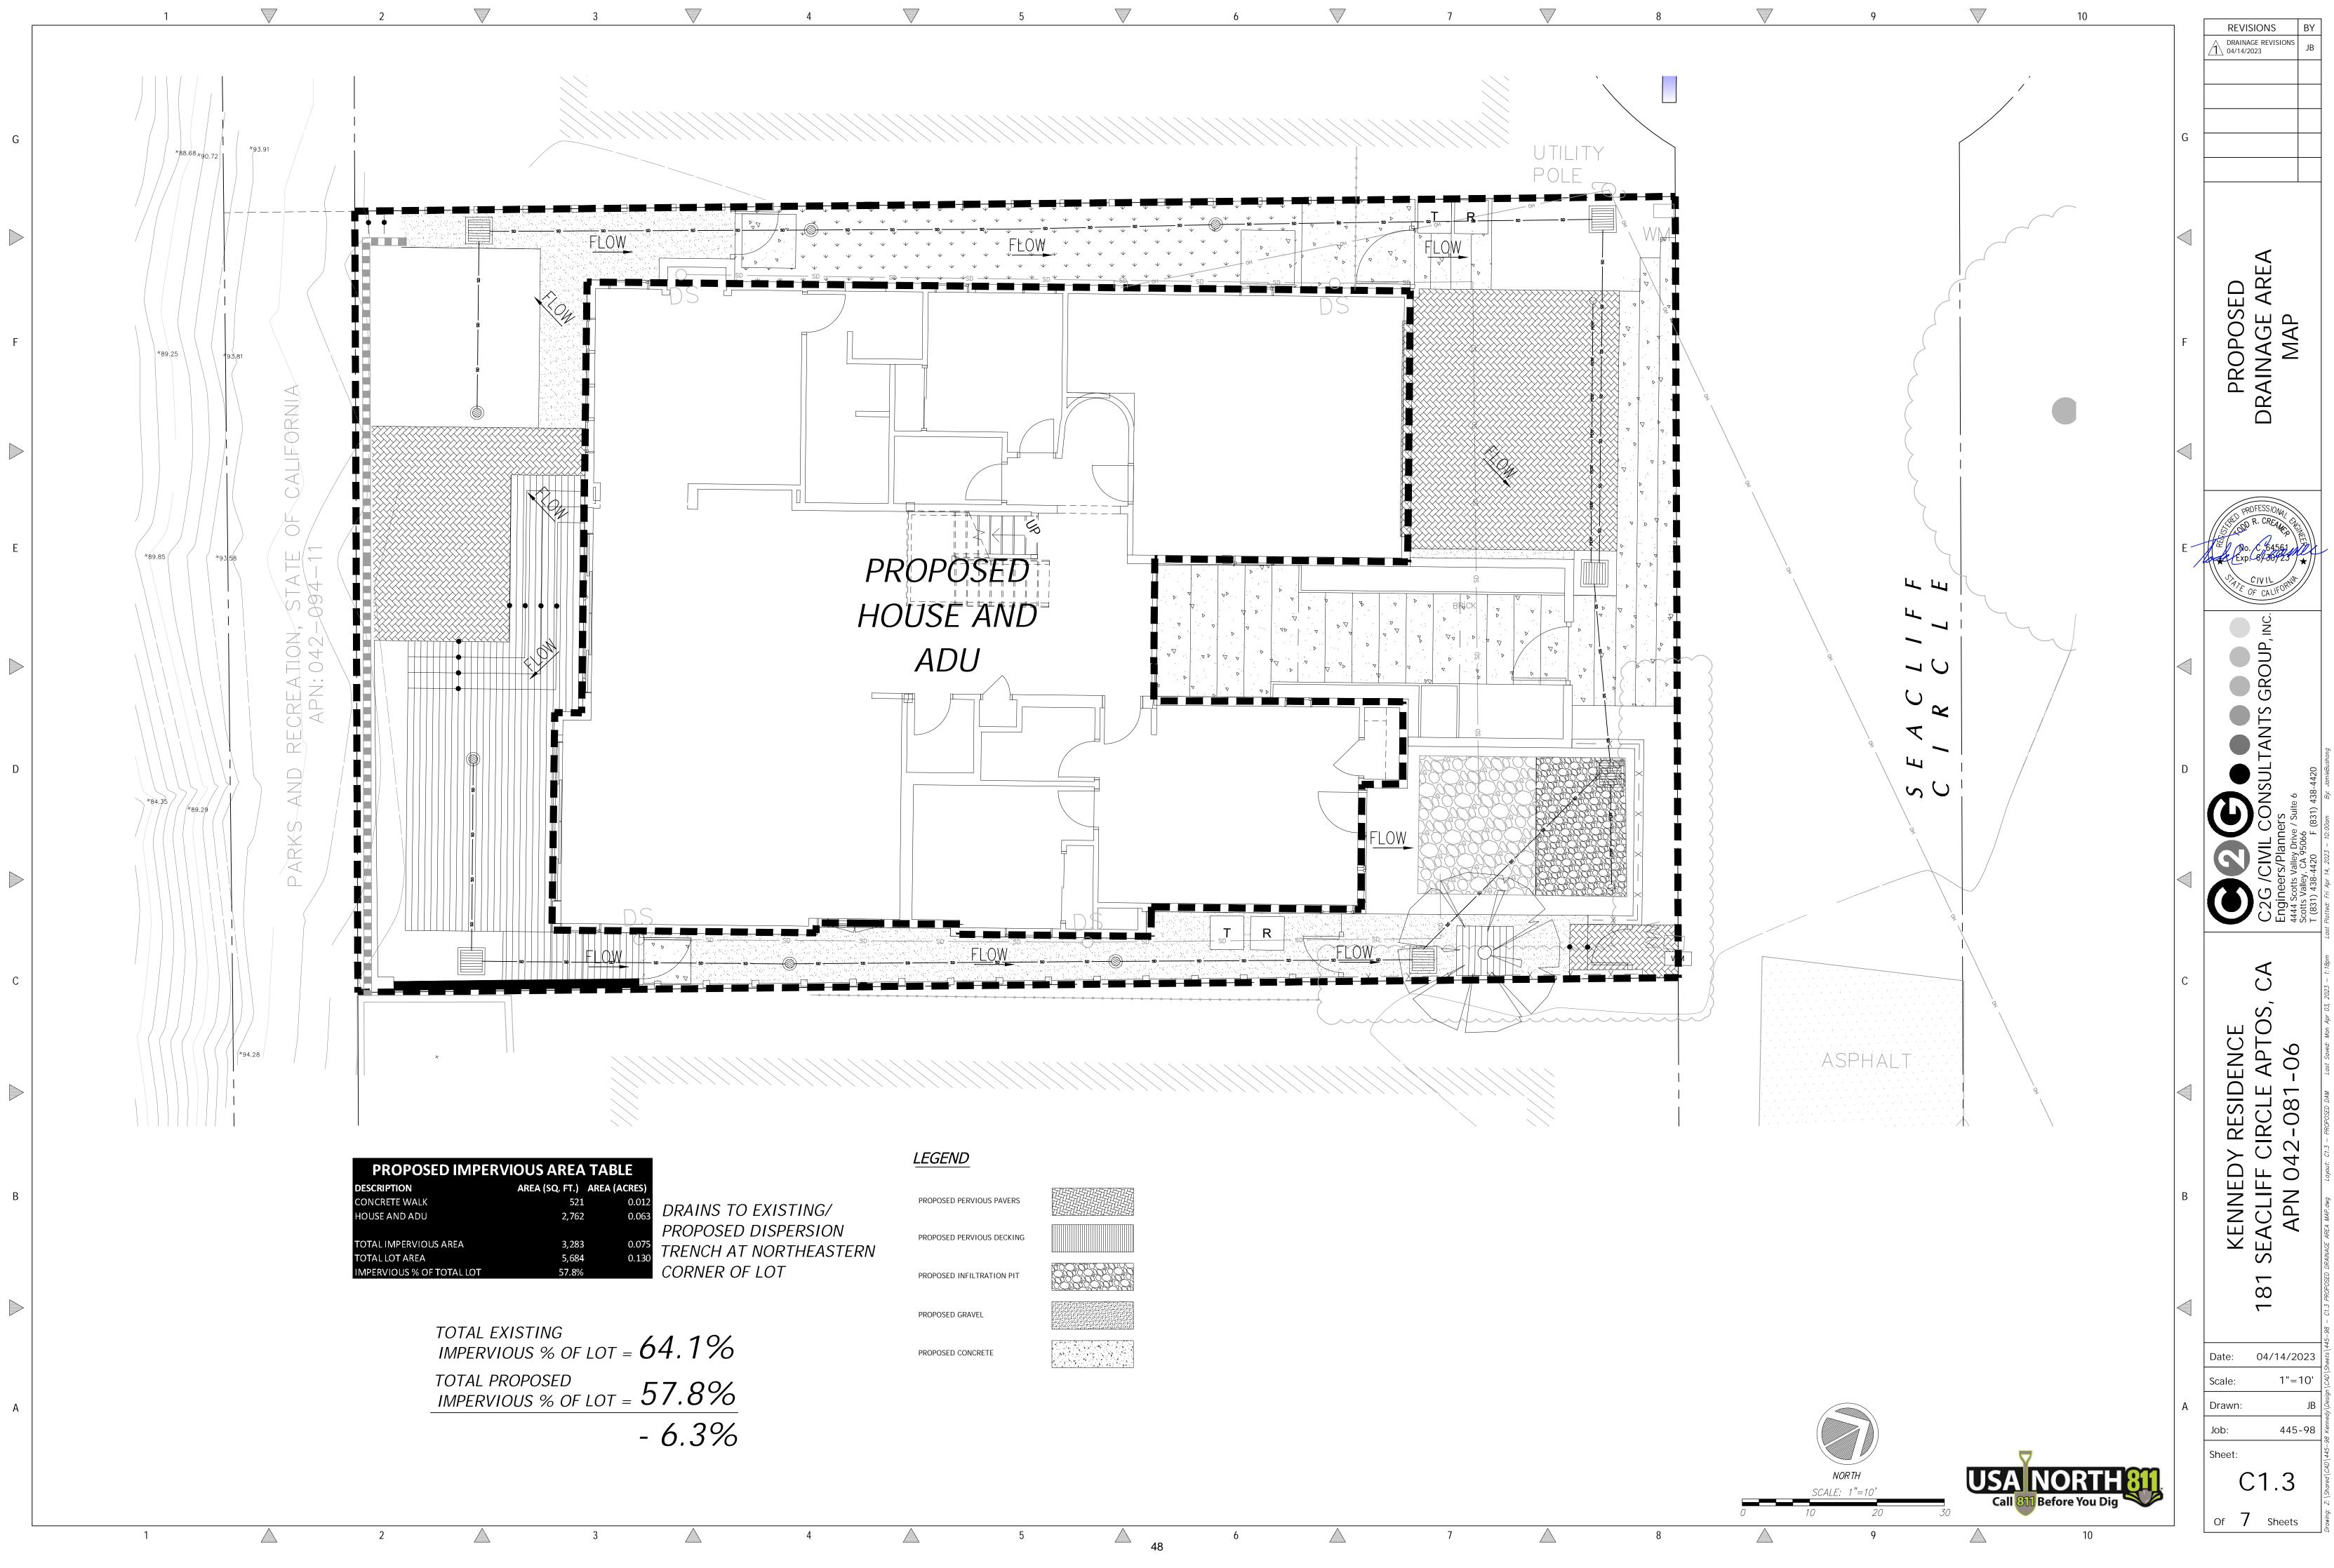

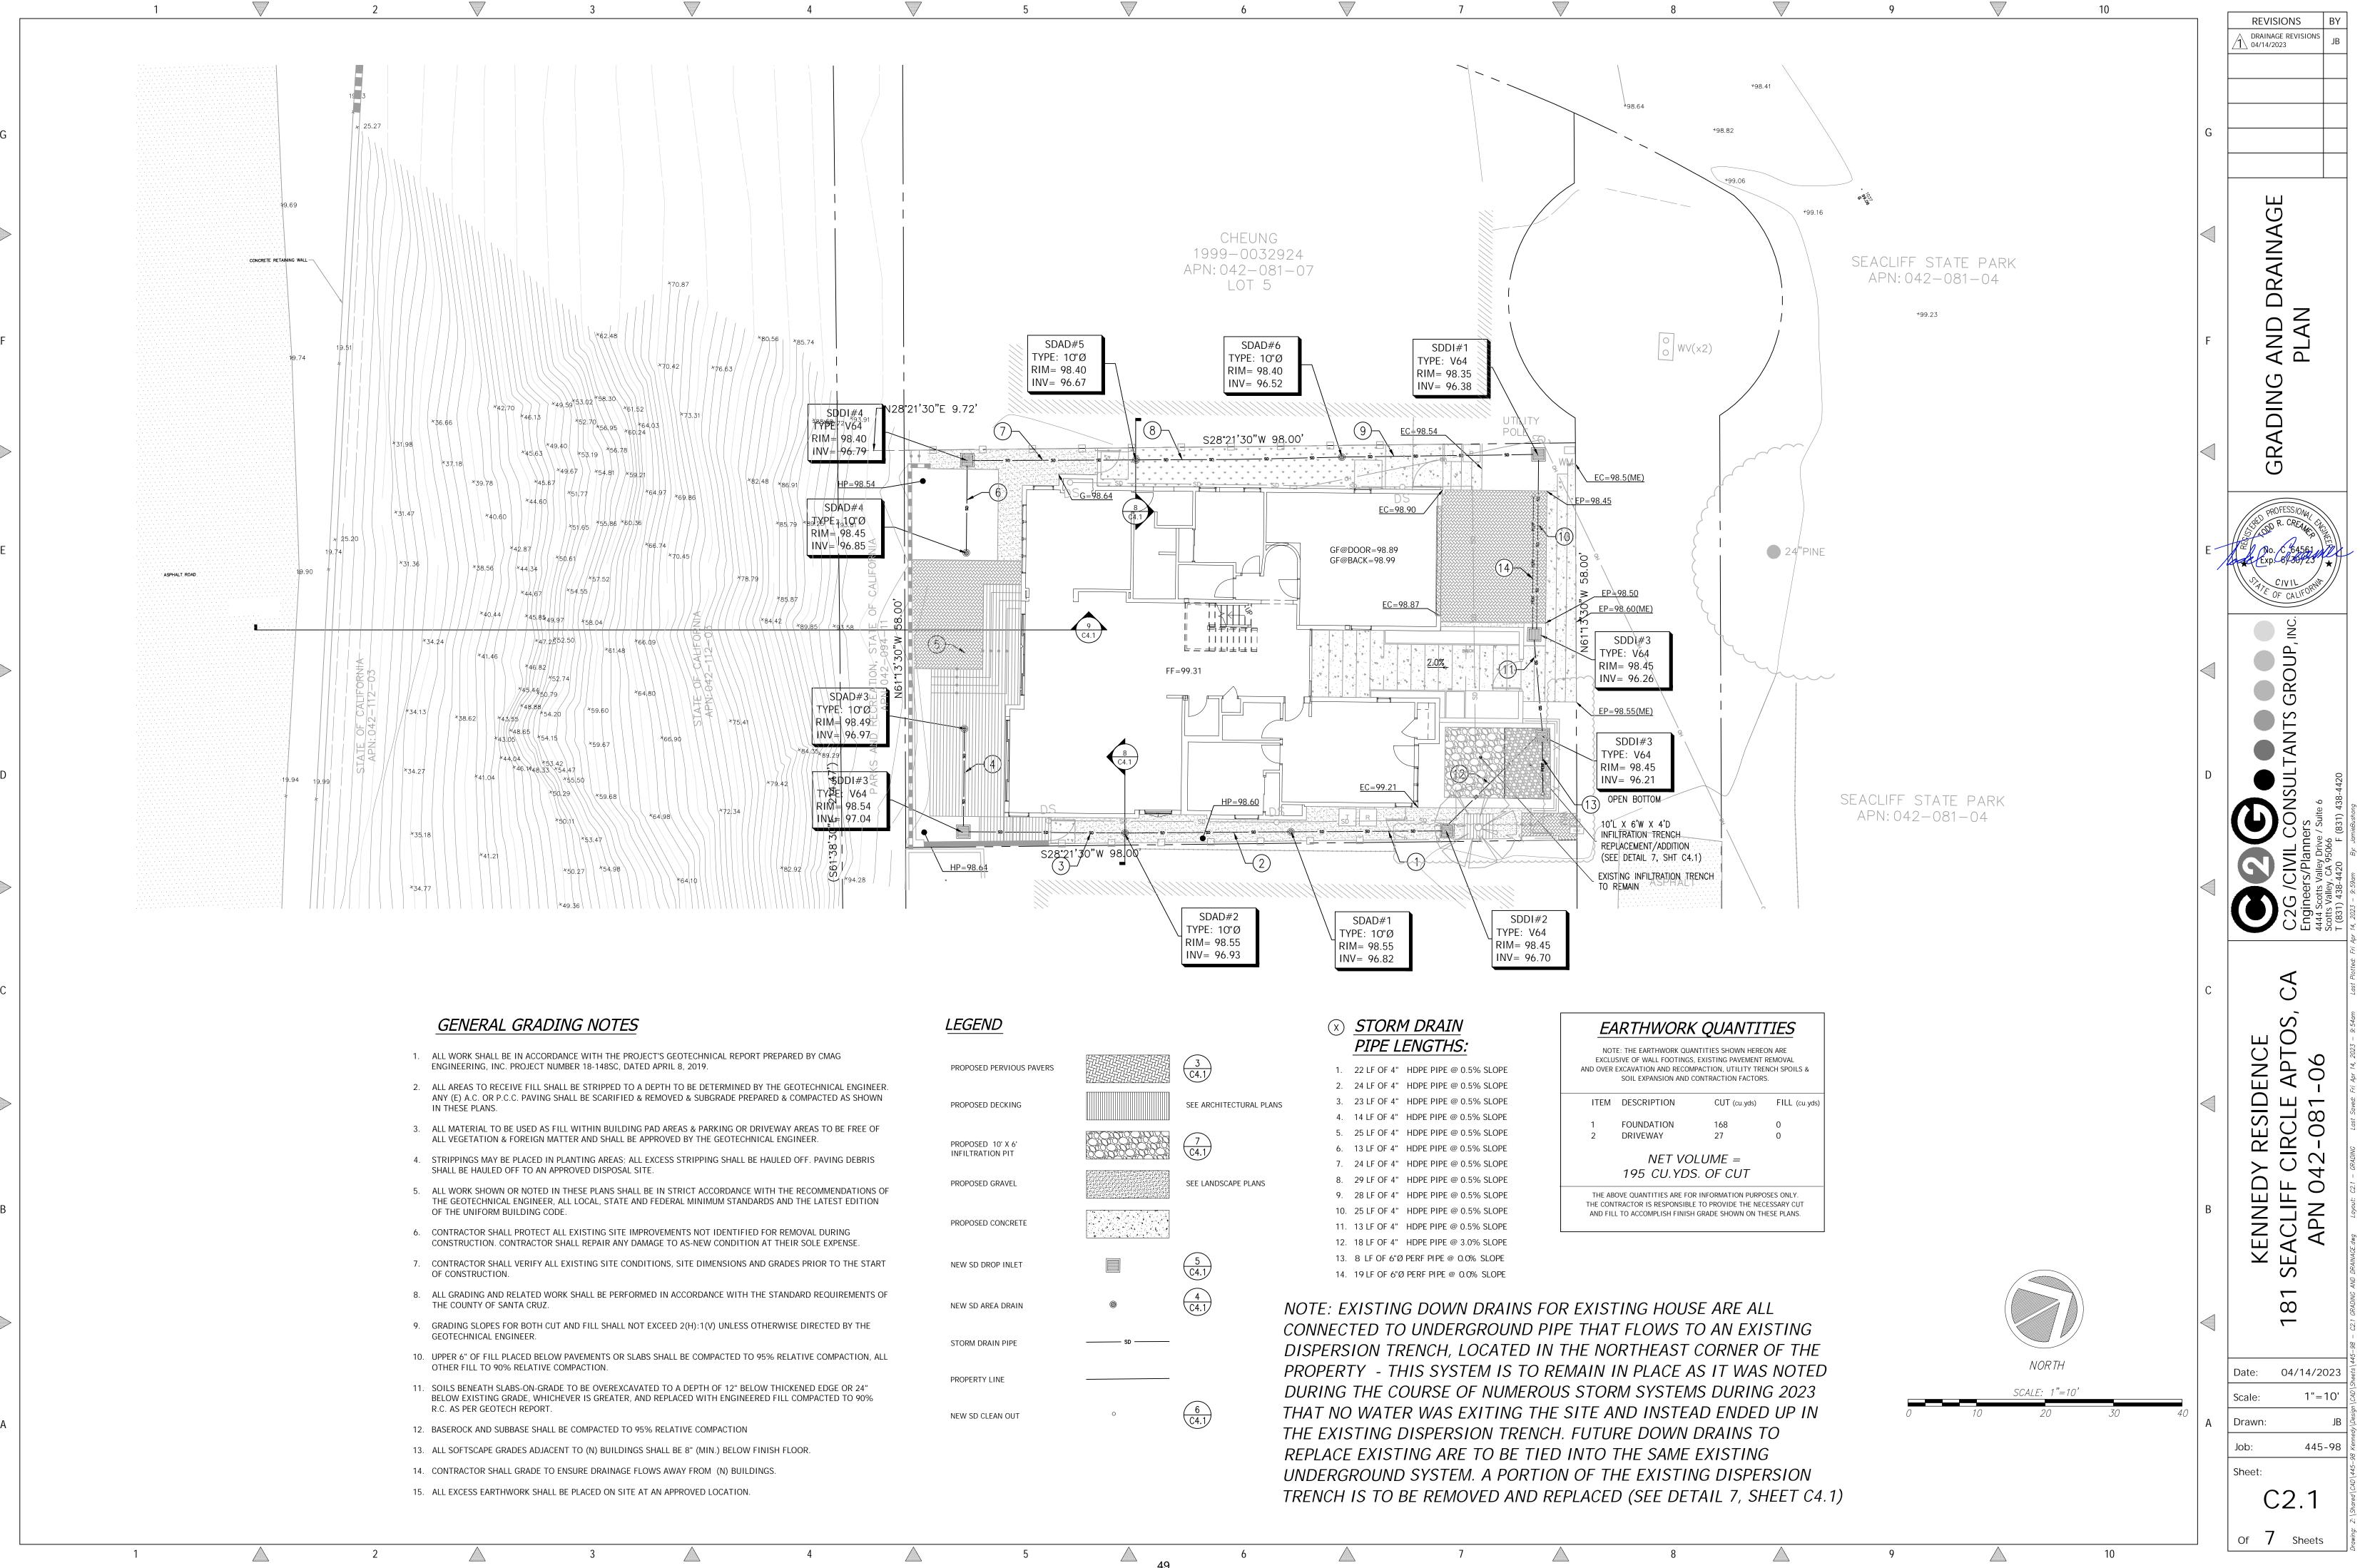

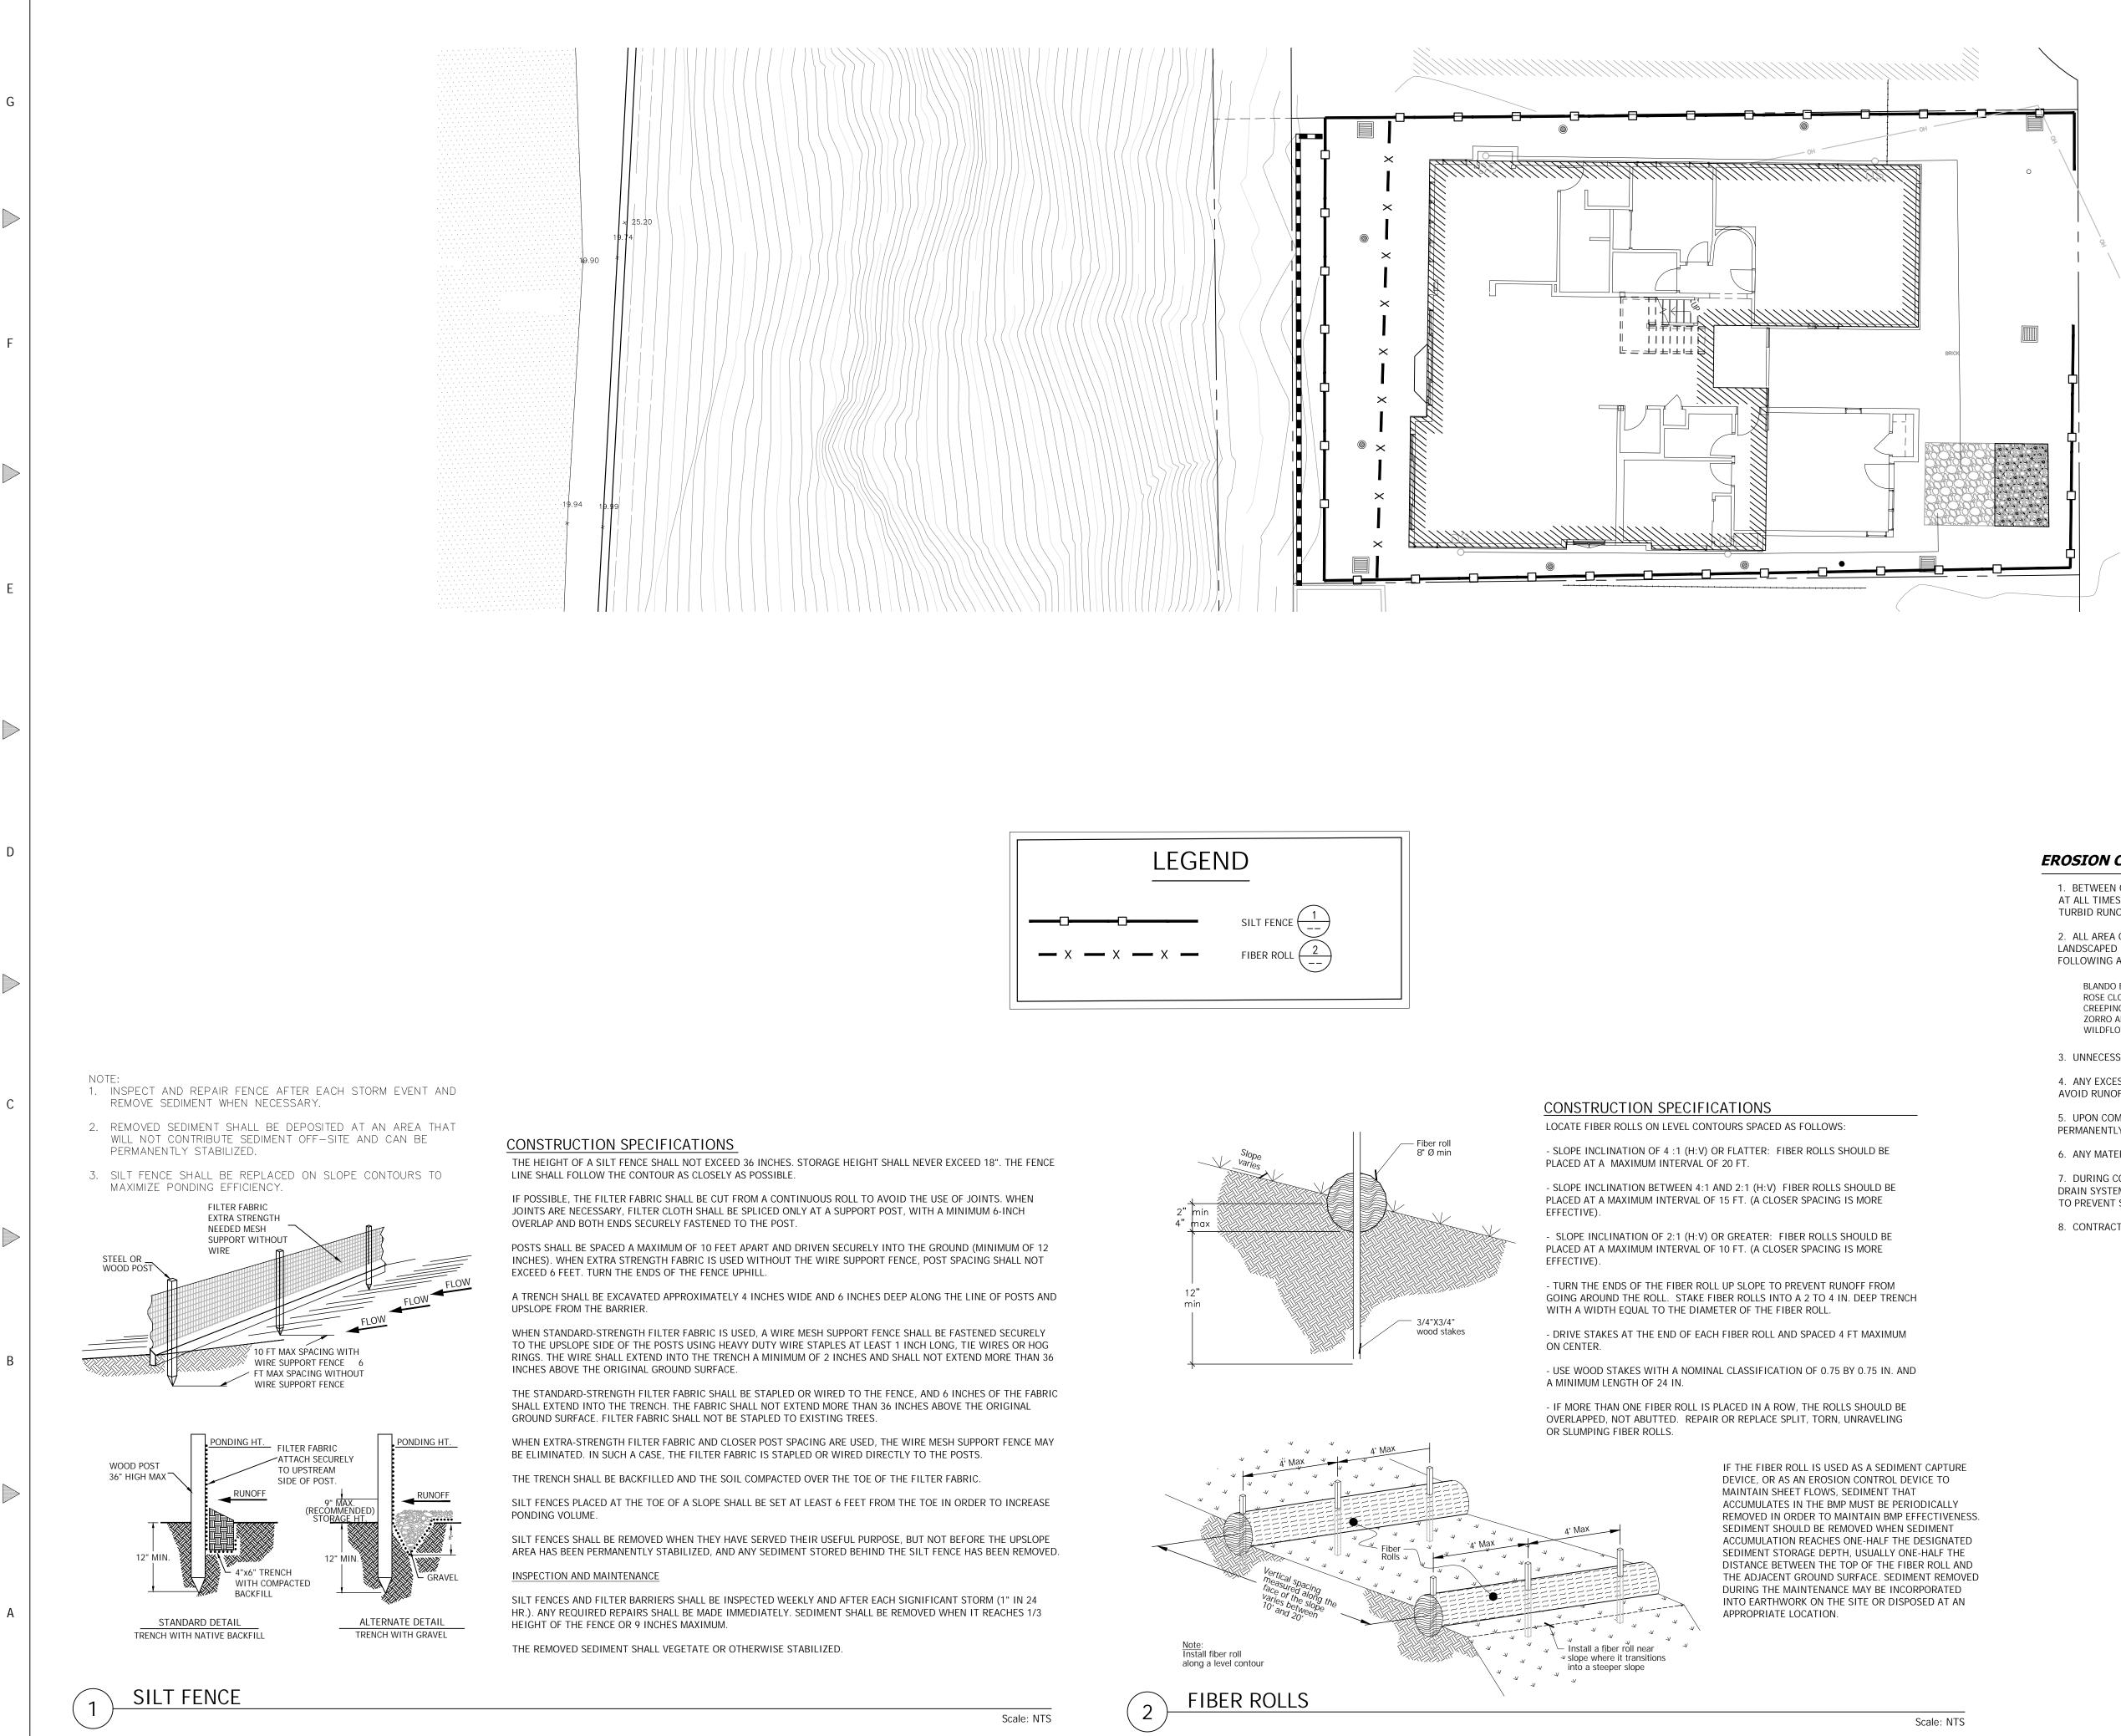

 ∇

4

 ∇

 \bigtriangledown

1

 \bigtriangledown

 \bigtriangleup

3

 \bigtriangleup

2

 \bigtriangleup

1

 ∇

4

 \bigtriangleup

 \square

50

6

7

EROSION CONTROL NOTES

 $\langle \rangle$

/

SETWEEN OCTOBER 15 AND APRIL 15, EXPOSED SOIL SHALL BE PR AT ALL TIMES. HAY BALES, FILTER BERMS, OR OTHER MEANS SHALL BE EMPLOYED TO PREVENT TURBID RUNOFF TO ADJOINING PROPERTIES.

 \bigtriangledown

10

2. ALL AREA ON AND OFF SITE, EXPOSED DURING CONSTRUCTION, IF NOT PERMANENTLY LANDSCAPED PER PLANS, SHALL BE PROTECTED BY MULCHING AND/OR PLANTING OF THE FOLLOWING APPROVED EROSION CONTROL MIX, AT A RATE OF 35 POUNDS PER ACRE:

BLANDO BROME 50% ROSE CLOVER (PELLET INOCULATED) 35% CREEPING RED RESCUE 15% ZORRO ANNUAL FESCUE TRACE WILDFLOWERS TRACE


3. UNNECESSARY GRADING AND DISTURBING OR SOIL IS NOT ALLOWED.

4. ANY EXCESS MATERIAL SHALL BE DISPOSED OF OFF-SITE OR STOCKPILED IN A MANNER TO AVOID RUNOFF ONTO ADJOINING PROPERTIES.


5. UPON COMPLETION OF CONSTRUCTION, ALL REMAINING EXPOSED AREAS SHALL BE PERMANENTLY REVEGETATED PER LANDSCAPE PLANS.

6. ANY MATERIAL STOCKPILED DURING CONSTRUCTION SHALL BE COVERED WITH PLASTIC. 7. DURING CONSTRUCTION, NO TURBID SITE WATER SHALL BE PERMITTED TO ENTER STORM DRAIN SYSTEM. USE OF SILT AND GREASE TRAPS, FILTER BERMS, OR HAY BALES MAY BE USED

TO PREVENT SUCH DISCHARGE. 8. CONTRACTOR SHALL NOTIFY COUNTY 48 HOURS BEFORE ANY EARTHWORK IS BEGUN.

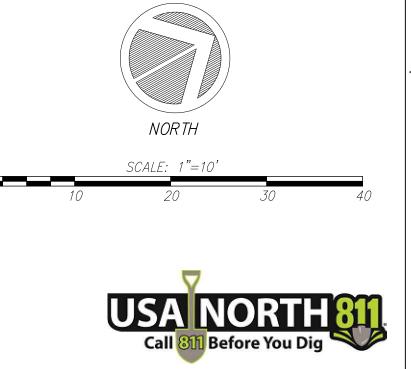


10

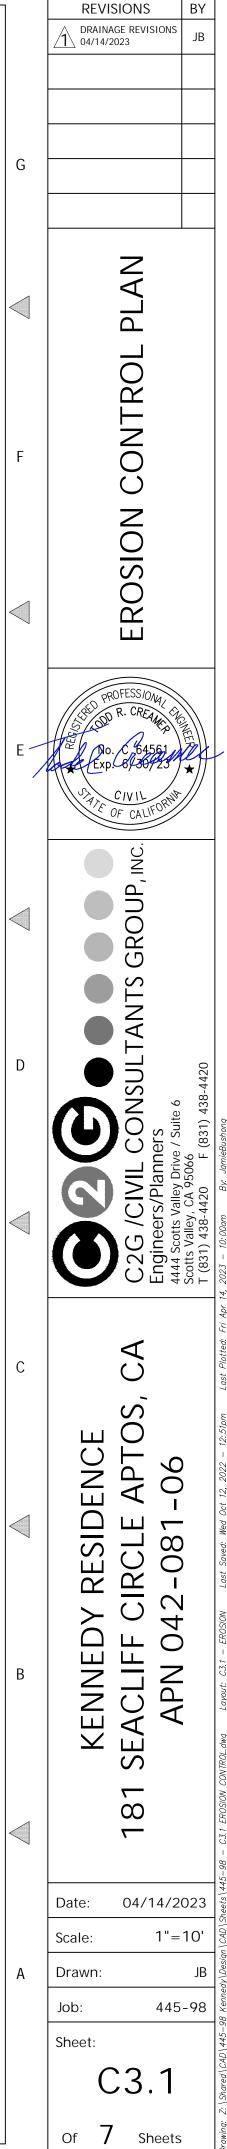


8

 \square

9

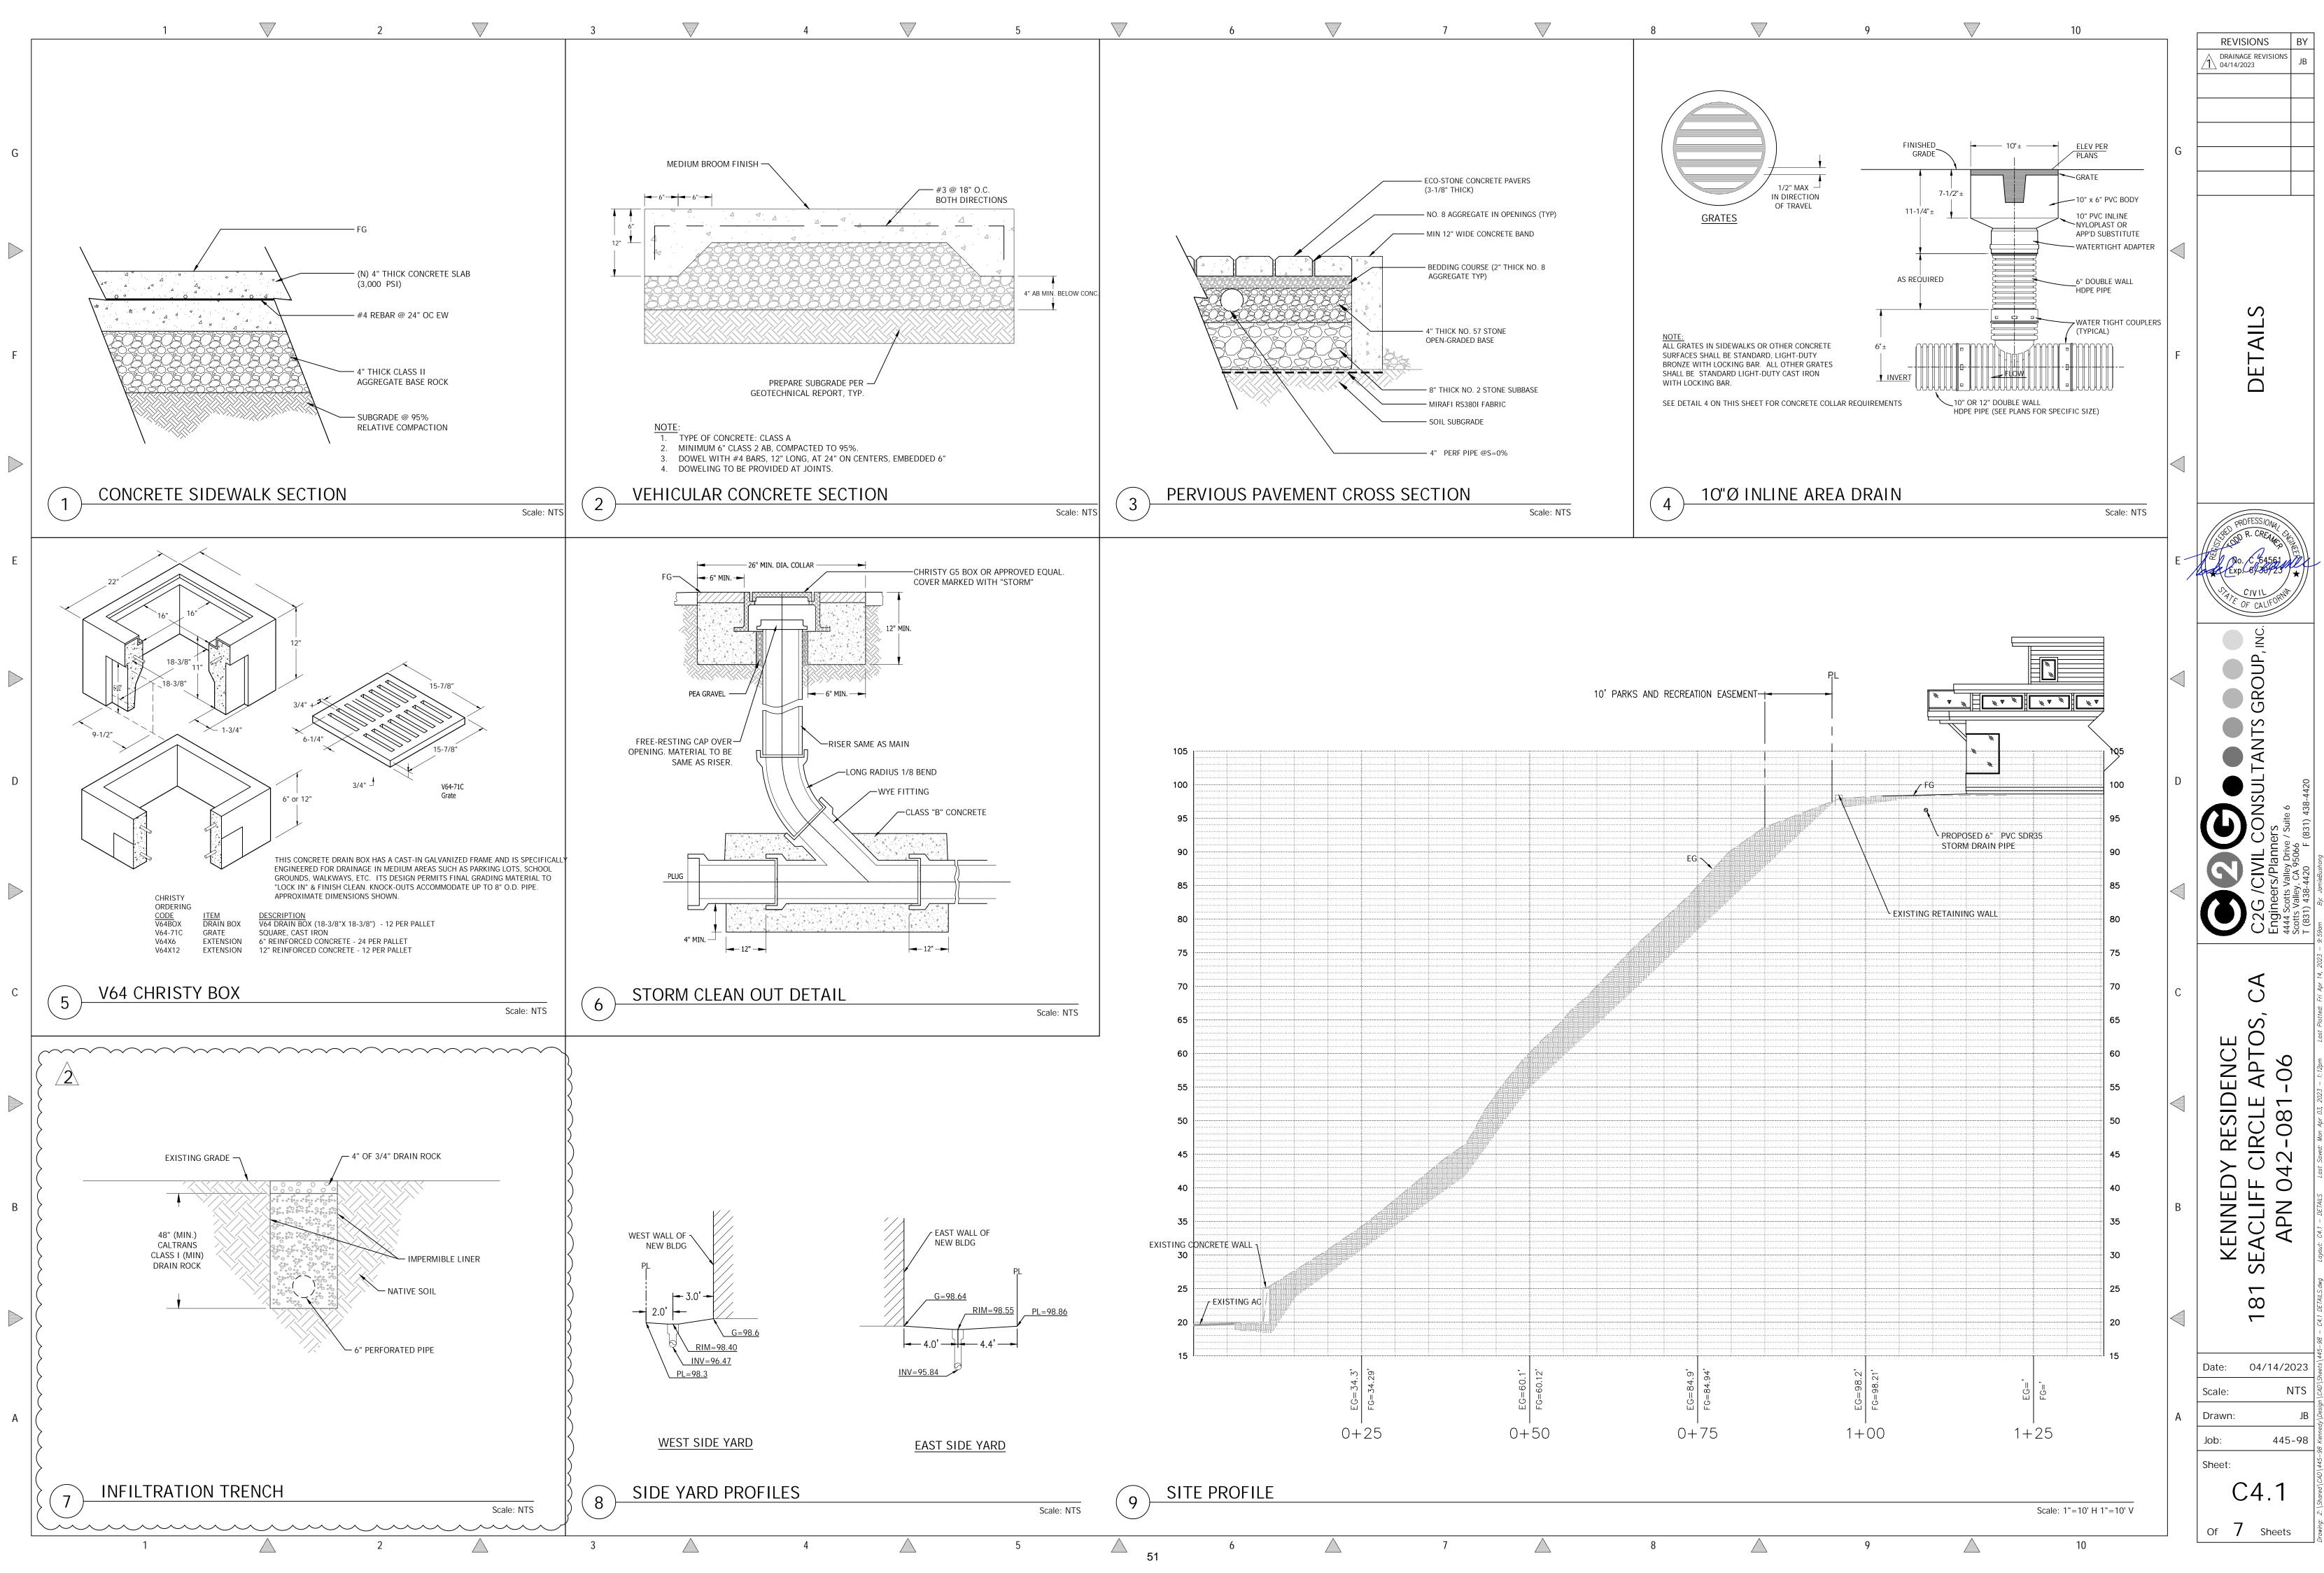


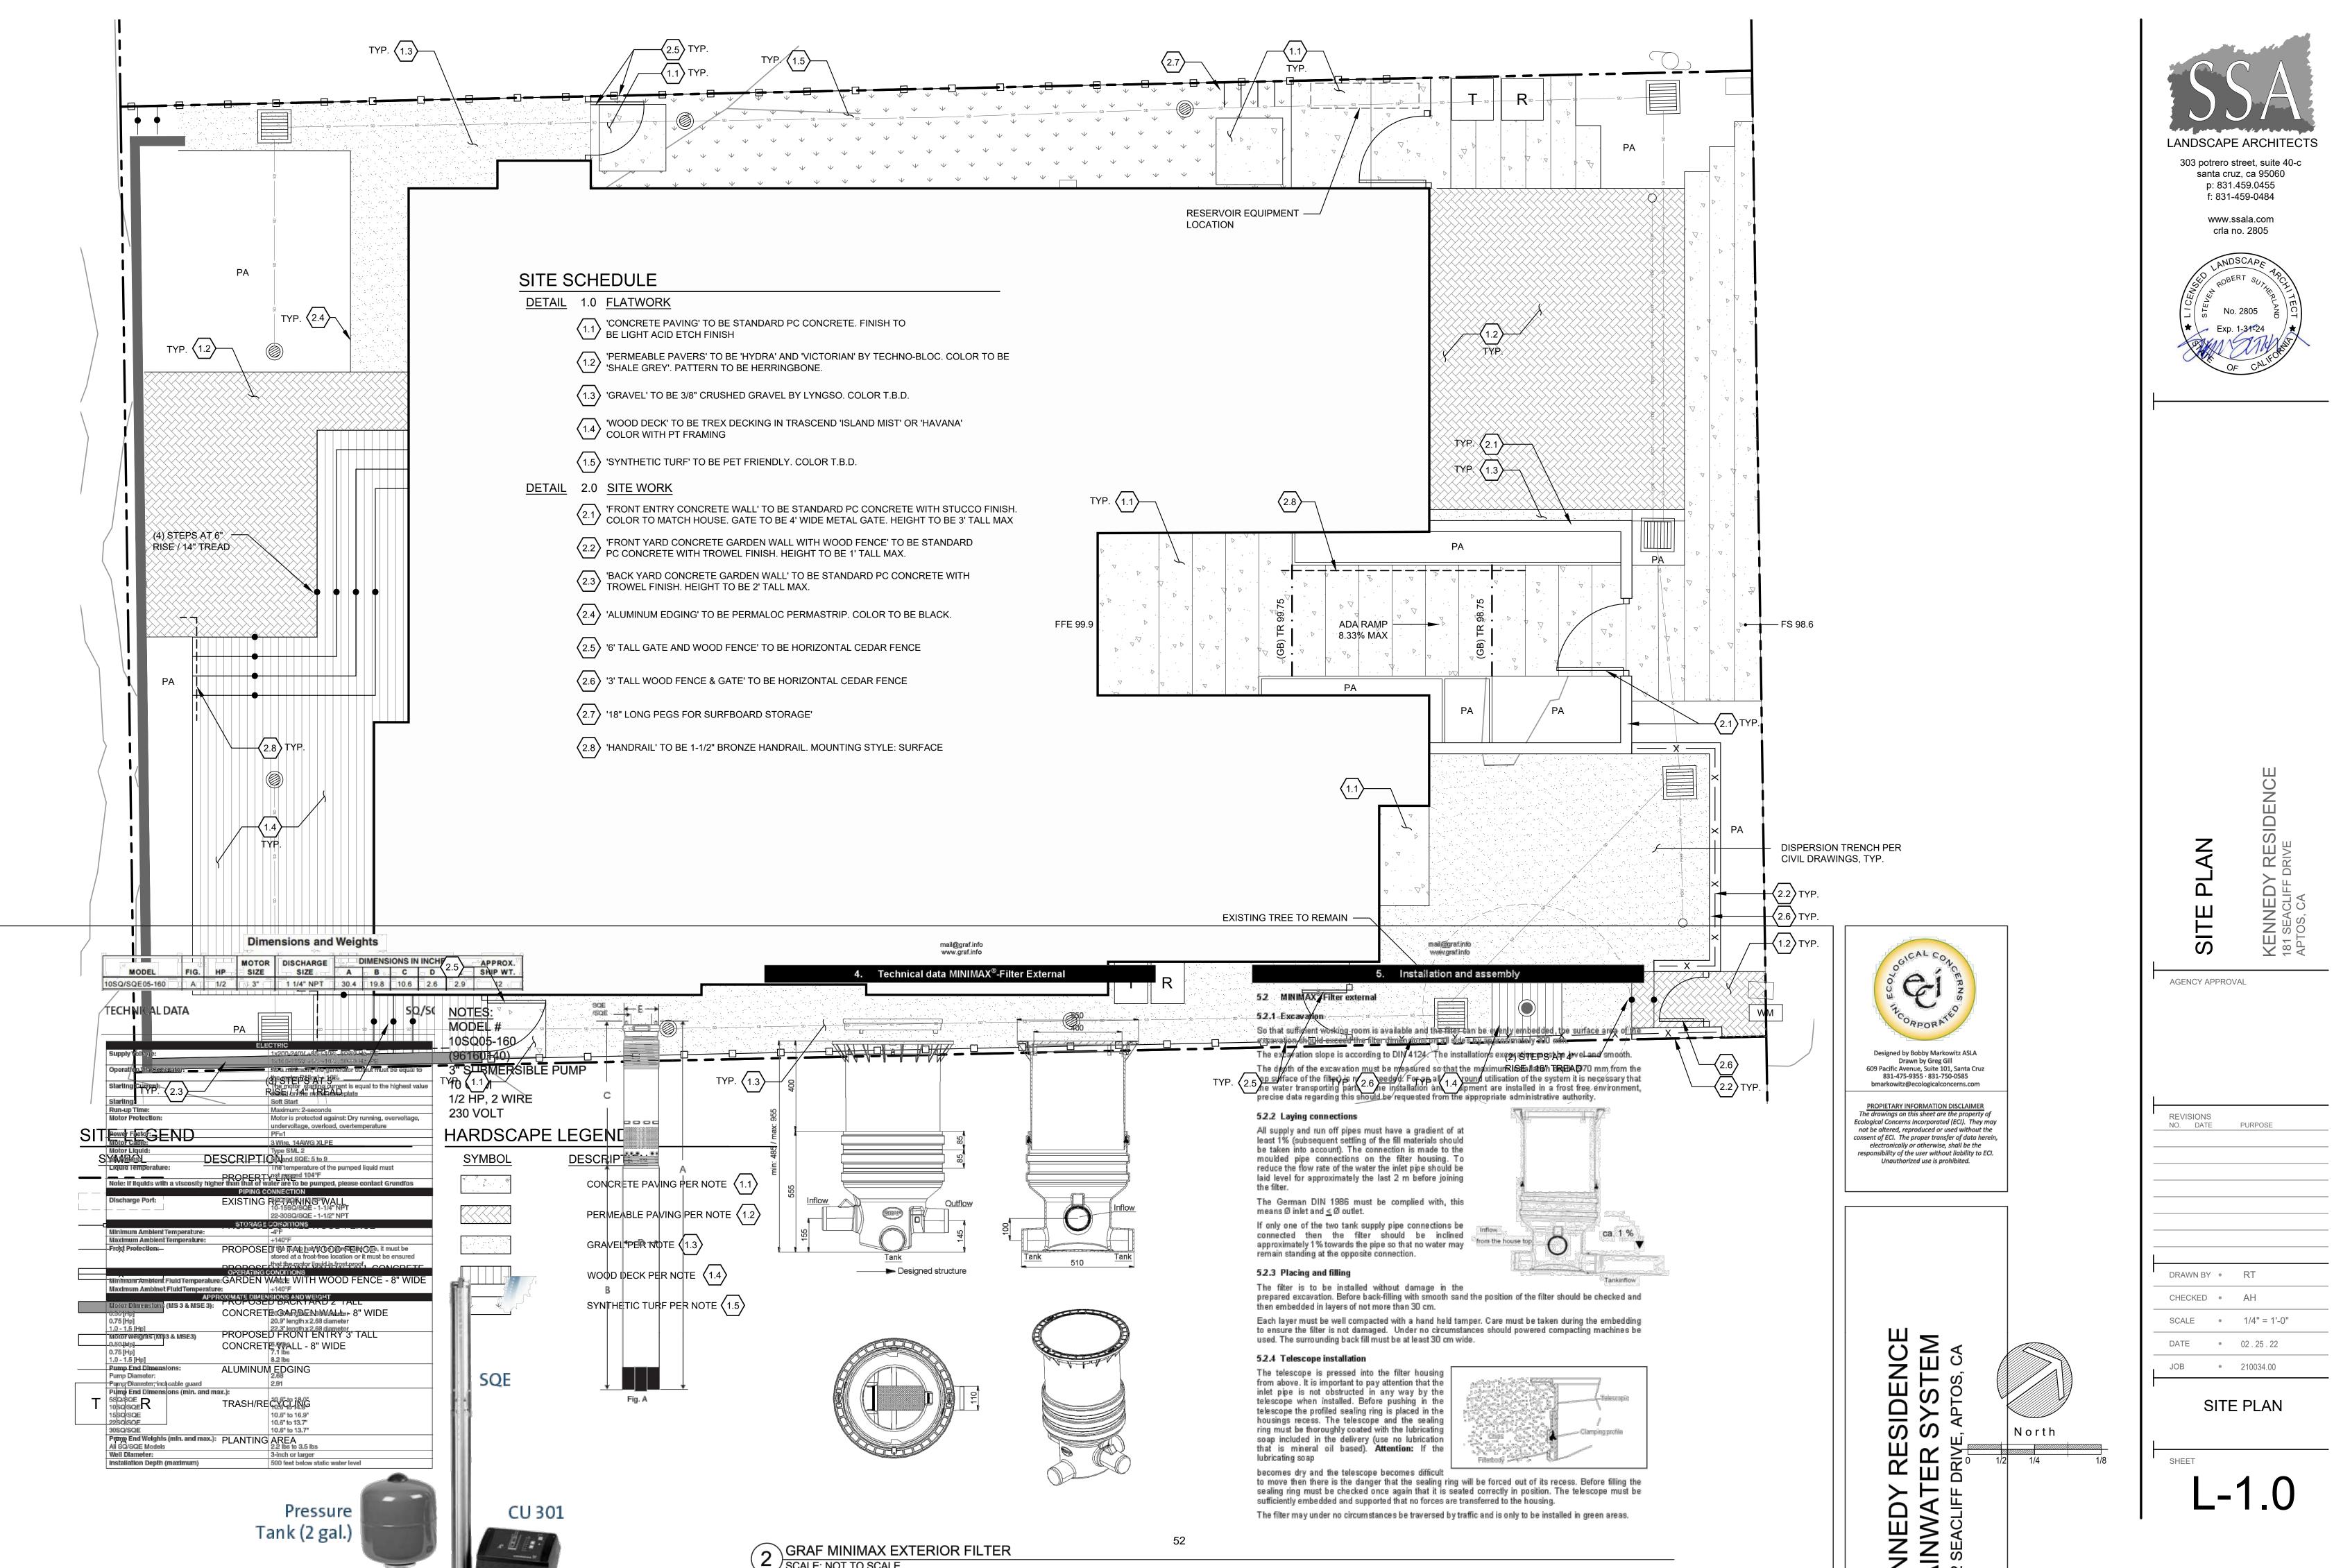




VICTORIEN 60 mm

DESCRIPTION: Paver TEXTURE: Smooth

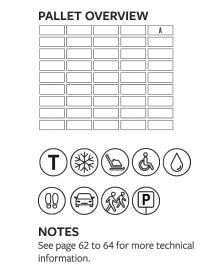

See page 30 for more information about applications.


Specifications per pallet				perial		Metric	
ШШ	Cubing	123	3.70 ft ²		11.50 m ²		
60 mm	Approx. Weight		34	81 lbs		1 579 kg	
	Number of rows		11				
	Coverage per row		11.	25 ft ²		1.05 m ²	
	Linear coverage per row	Depth		15.87 lin. ft		4.84 lin. m	
		Length	31.	74 lin. ft		9.68 lin. m	
		nit dimensio	ons	in	mm	Units/pallet	
		Hei	ght	2 3/8	60	495 units	
		Wi	dth	4 1⁄4	108	4 units/ft ²	
		Len	gth	8 1⁄2	216	43.10 units/m ²	

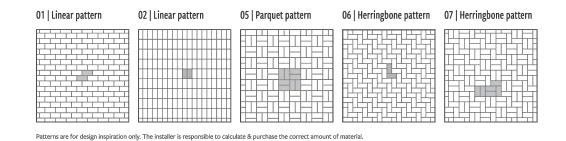



PERMEABLE PAVERS






LEED[®] Projects.

 Reduces stormwater runoff to municipal sewers. • Eliminates the need for retention basins and optimizes the use of land.

CHARACTERISTICS Clamp or Mechanical tool available for machine installation. Check with your local Techo-Bloc representative for more information.

 6000 to 8000 sq. ft can be installed per day with mechanical installation and a team of 5 persons NOTES

See page 33 and 101 for more technical information. See page 30 for more information about applications. JOINT WIDTH: 1/2" (13 mm) % OF SURFACE OPENING: 8.3 % INFILTRATOIN RATE: 605 in./hr (15 345 mm/hr)







HYDRA

DESCRIPTION: Paver TEXTURE: Smooth

	Specifications per pallet	Imperial		Metric		
	Cubing	62 ft ²		5.76 m ²		
	Approx. Weight	2 811 lbs		1 275 kg	5	1
	Number of rows	8				10
	Coverage per row	7.75 ft ²		0.72 m ²		PAV
	Linear coverage per row	11.80 lin.	ft	3.60 lin.	m	PERMEABLE PAVERS
)(&)		nit dimensions	in	mm	Units/pallet	100
		Height	3 ¹⁵ ⁄16	100	96 units	a M
J)		Width	7 7⁄8	200		
		Length	11 ¹³ ⁄16	300		




Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.








TREX DECKING

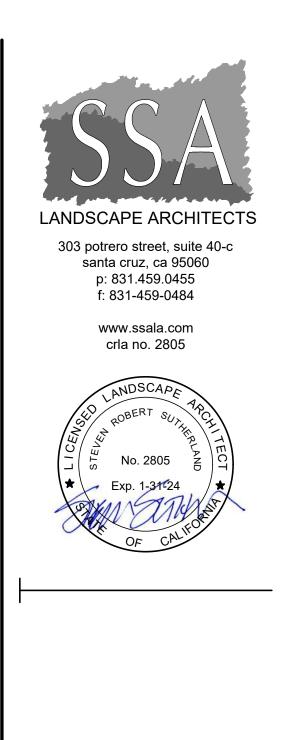


MATERIALS BOARD	KENNEDY RESIDENCE 181 SEACLIFF DRIVE APTOS, CA
AGENCY APPROVAL	

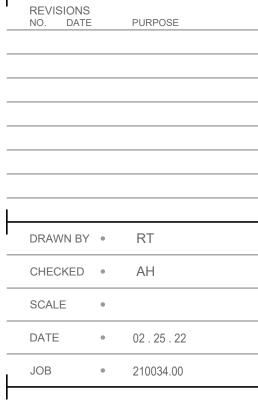

MATERIALS BOARD

SHEET

L-1.1

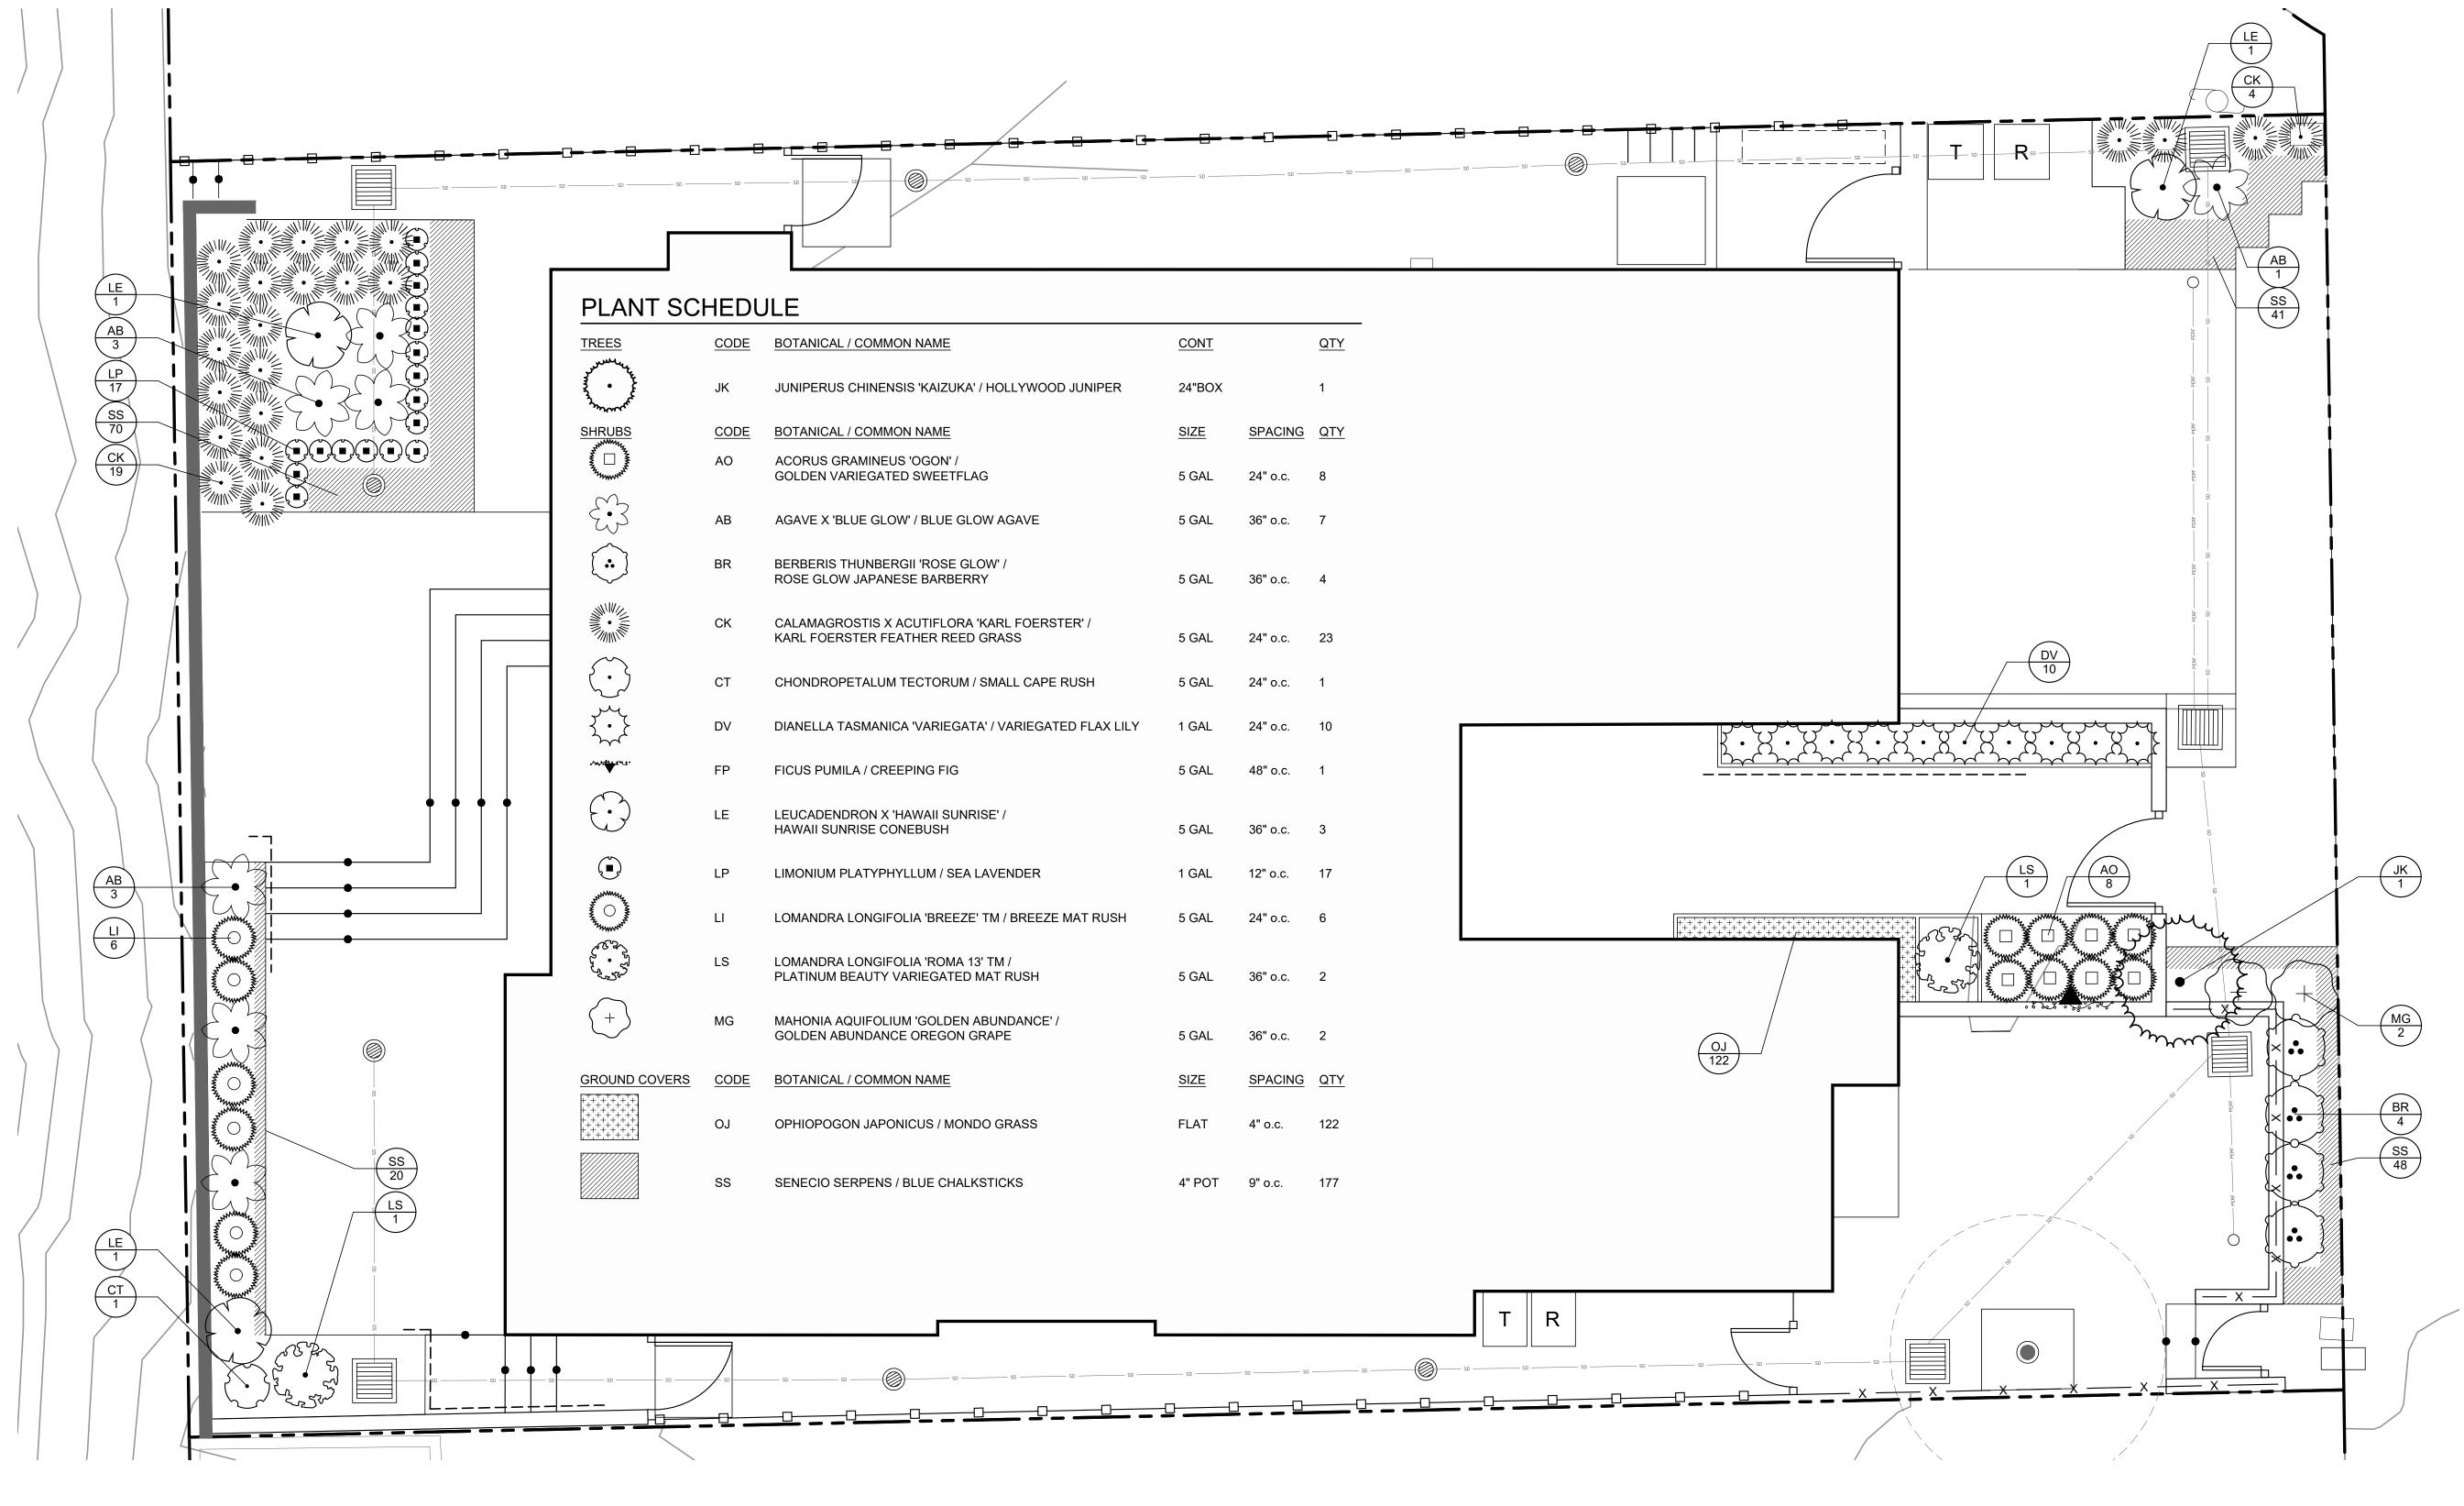

PLANTING NOTES

- 1. PLANT COUNTS SHOWN ARE FOR BIDDING REFERENCE ONLY. CONTRACTOR SHALL SUPPLY ALL PLANTS REQUIRED TO FULFILL DESIGN INTENT AS SHOWN. ADDITIONALLY, IF A GROUNDCOVER SYMBOL OR PATTERN IS SHOWN STOPPING AT THE EDGE OF A TREE OR SHRUB CANOPY SYMBOL, THE INTENT IS THAT THE GROUNDCOVER CONTINUE UNDERNEATH THE CANOPY SYMBOL(S) TO PROVIDE AN EVENLY COVERED GROUND PLANE.
- 2. CONTRACTOR SHALL PROTECT AND MAINTAIN ALL PLANT MATERIAL FROM THE TIME OF DELIVERY TO THE TIME OF PROJECT ACCEPTANCE. THE OWNER SHALL NOT BE RESPONSIBLE FOR LOSSES DUE TO VANDALISM, THEFT, OR SEVERE WEATHER.
- 3. CONTRACTOR SHALL PLACE PLANT MATERIALS SO THEY DO NOT INTERFERE WITH IRRIGATION SYSTEM OR INHIBIT REQUIRED COVERAGE. PLANT LOCATIONS MAY BE ADJUSTED AS LONG AS DESIGN IS NOT ALTERED SIGNIFICANTLY. CONTRACTOR SHALL SET OUT PLANT MATERIAL IN THEIR CONTAINERS AS SHOWN AND RECEIVE ACCEPTANCE FROM PROJECT MANAGER WITH RESPECT TO PLANT HEALTH/APPEARANCE AND LOCATION PRIOR TO INSTALLATION. CONTRACTOR SHALL GIVE A MINIMUM OF 2 WORKING DAY NOTICE FOR INSPECTION/OBSERVATION AND SHALL HAVE ALL MATERIAL IN SPECIFIED LOCATIONS FOR REVIEW AT ONE TIME.
- 4. ALL NON-TURF PLANTING AREAS SHALL RECEIVE A PRE-EMERGENT HERBICIDE TREATMENT AND A 3" LAYER OF MAHOGANY COLOR PRO CHIP MULCH TOP DRESS (1-3" PIECES-SUBMIT SAMPLES)
- 5. ALL PLANTING AREAS SHALL BE MAINTAINED IN A WEED FREE CONDITION UNTIL PROJECT ACCEPTANCE.
- 6. PLANTS CAN BE INSPECTED AND REJECTED UPON DELIVERY.

WELO NOTES

- 1. A HORTICULTURAL SOIL ANALYST TEST SHALL BE CONDUCTED AT A MINIMUM OF (3) LOCATIONS THROUGHOUT THE PROJECT SITE, IN ADDITION TO AN ANALYSIS OF ANY TOP SOIL IMPORTED TO PROJECT PLANTING AREAS. CONTRACTOR TO FOLLOW AMENDMENT RECOMMENDATIONS FROM A QUALIFIED SOILS LABORATORY BASED ON TEST RESULTS.
- 2. SOIL AMENDMENT AND COMPOST TO BE ADDED TO PLANTING AREAS AT A RATE OF 4 CUBIC YARDS PER 1,000 SF. INCORPORATED TO A DEPTH OF SIX INCHES INTO THE SOIL.
- 3. A MINIMUM (3") LAYER OF MULCH SHALL BE APPLIED ON ALL EXPOSED SOIL SURFACES OF PLANTING AREAS EXCEPT IN TURF AREAS. REFER TO PLANTING PLAN FOR MULCH SPECIFICATION.
- 4. A LANDSCAPE IRRIGATION AUDIT SHALL BE CONDUCTED BY EITHER A LOCAL AGENCY LANDSCAPE IRRIGATION AUDITOR OR A THIRD PARTY LANDSCAPE IRRIGATION AUDITOR.
- 5. LANDSCAPE CONTRACT TO INSTALL THIS IRRIGATION SYSTEM PER PLAN AND PER ALL REQUIREMENTS OF THE CITY OF WATSONVILLE WATER EFFICIENT LANDSCAPE ORDINANCE.

I HAVE COMPLIED WITH THE CRITERIA OF THE ORDINANCE AND APPLIED THEM FOR THE EFFICIENT USE OF WATER IN THE IRRIGATION DESIGN PLAN.

PLANT ALTERNATIVES

- CUPHEA MICROPETALAJUNIPERUS NANA COMMUNIS
- CORDYLINE SPP.
- DRACAENA TRIFASCIATA
- SEDUM SPP. FESTUCA 'ELIJAH BLUE'
- STIPA ARUNDINACEA
- HELICTOTRICHON SEMPERVIRENS

North 1/8

SHEET

PLANTING PLAN

REVISIONS NO. DATE		PURPOSE
DRAWN BY	•	RT
CHECKED	•	AH
SCALE	٠	1/4" = 1'-0"
DATE	٠	02.25.22
JOB	٠	210034.00



Z

Ω


ANTING











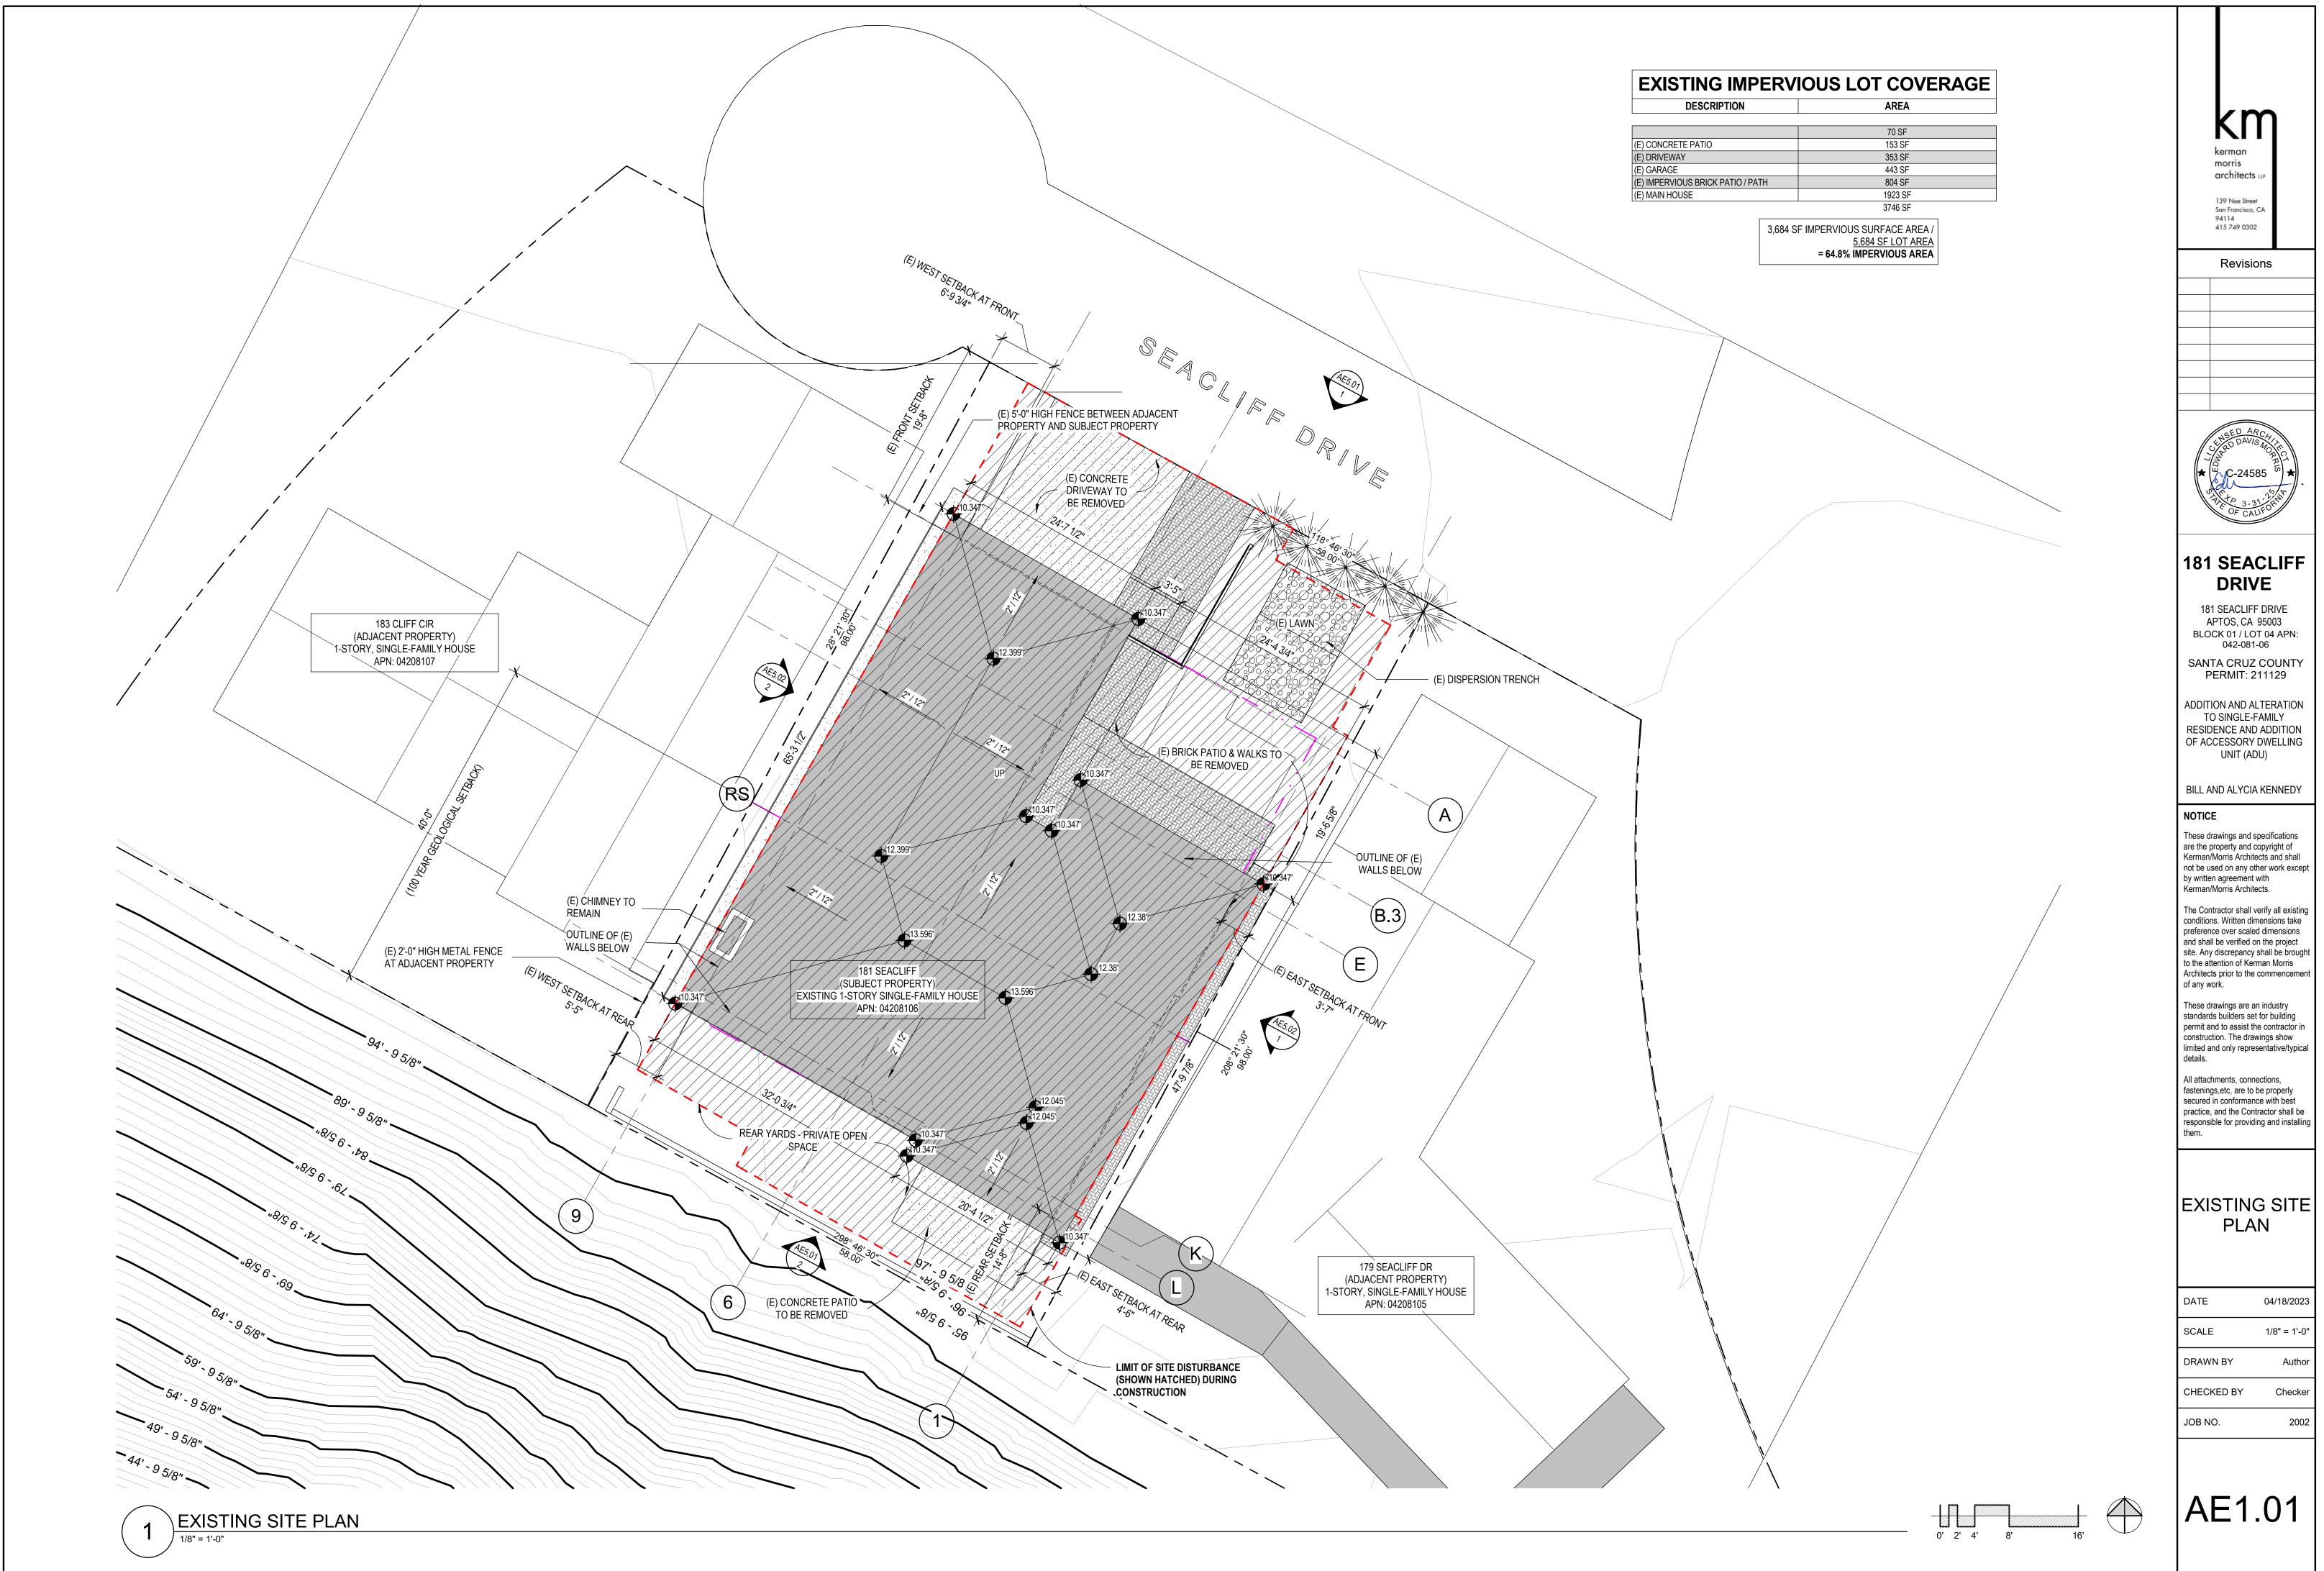


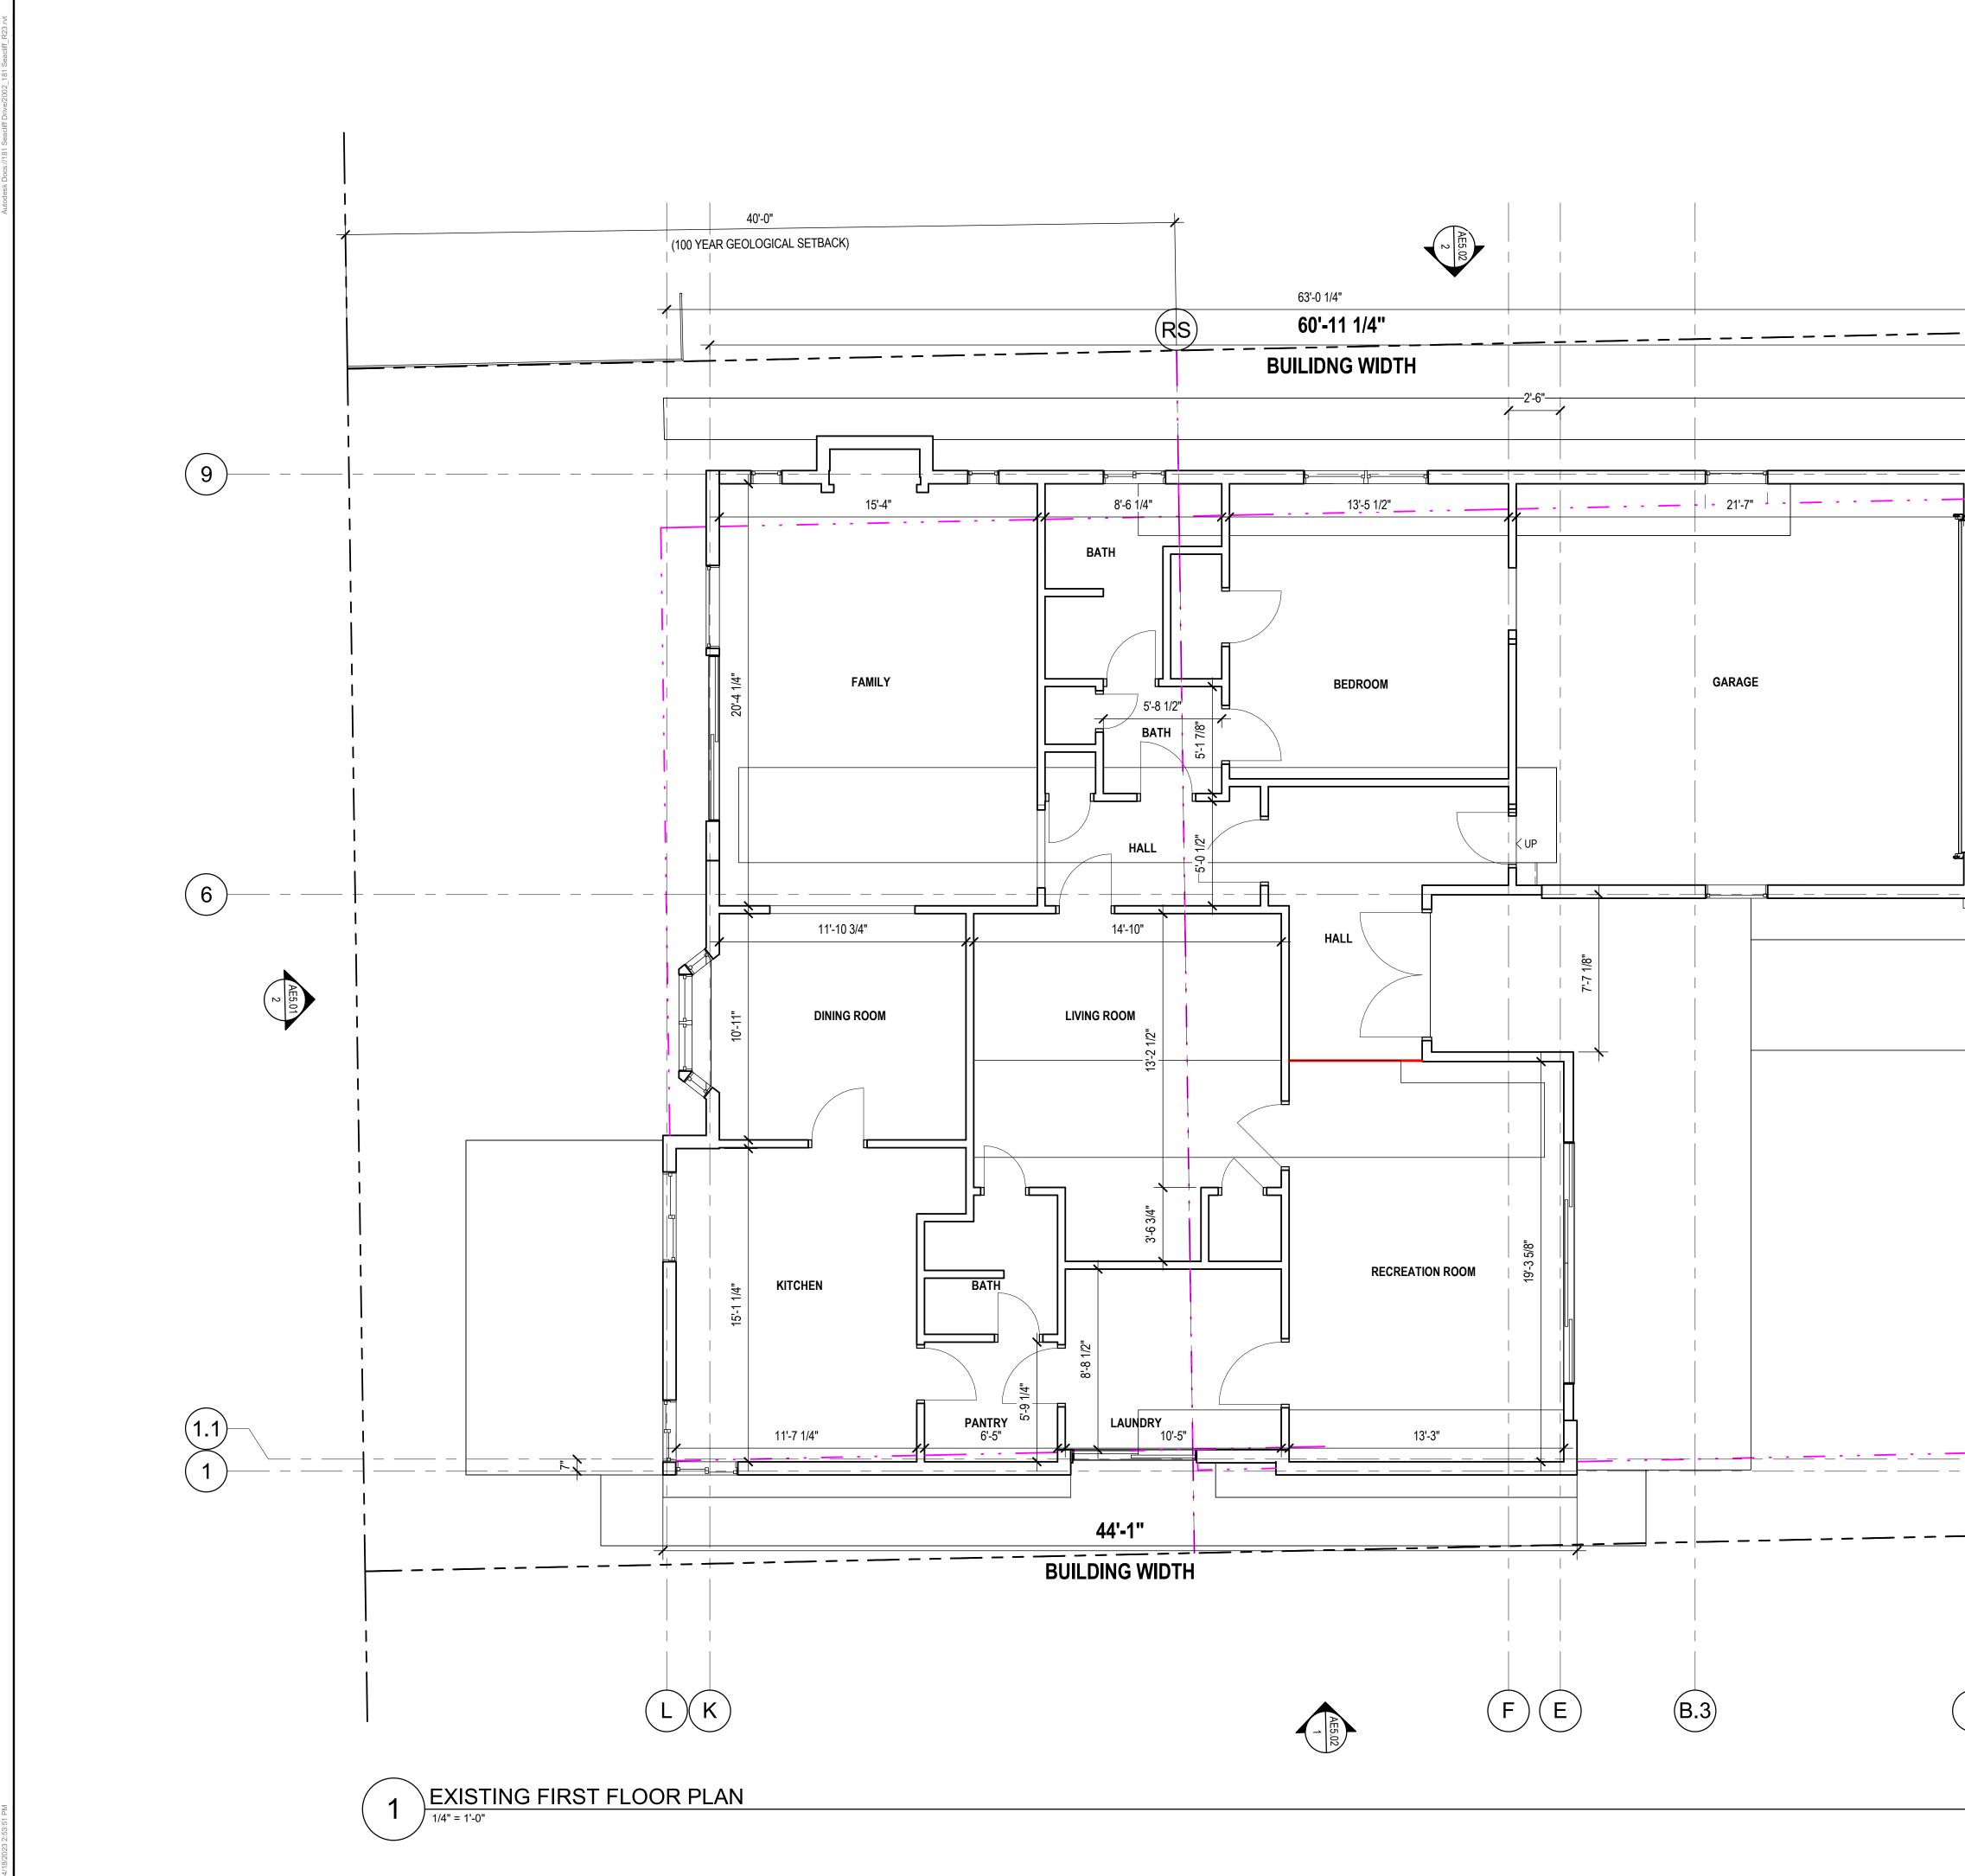


	Kerman morris architects up lay Noe Street Son Francisco, CA 415 749 0302 Ison Francisco, CA 415 749 0302 Revisions Image: Calibration of the
A	DRAWN BY Author CHECKED BY Checker

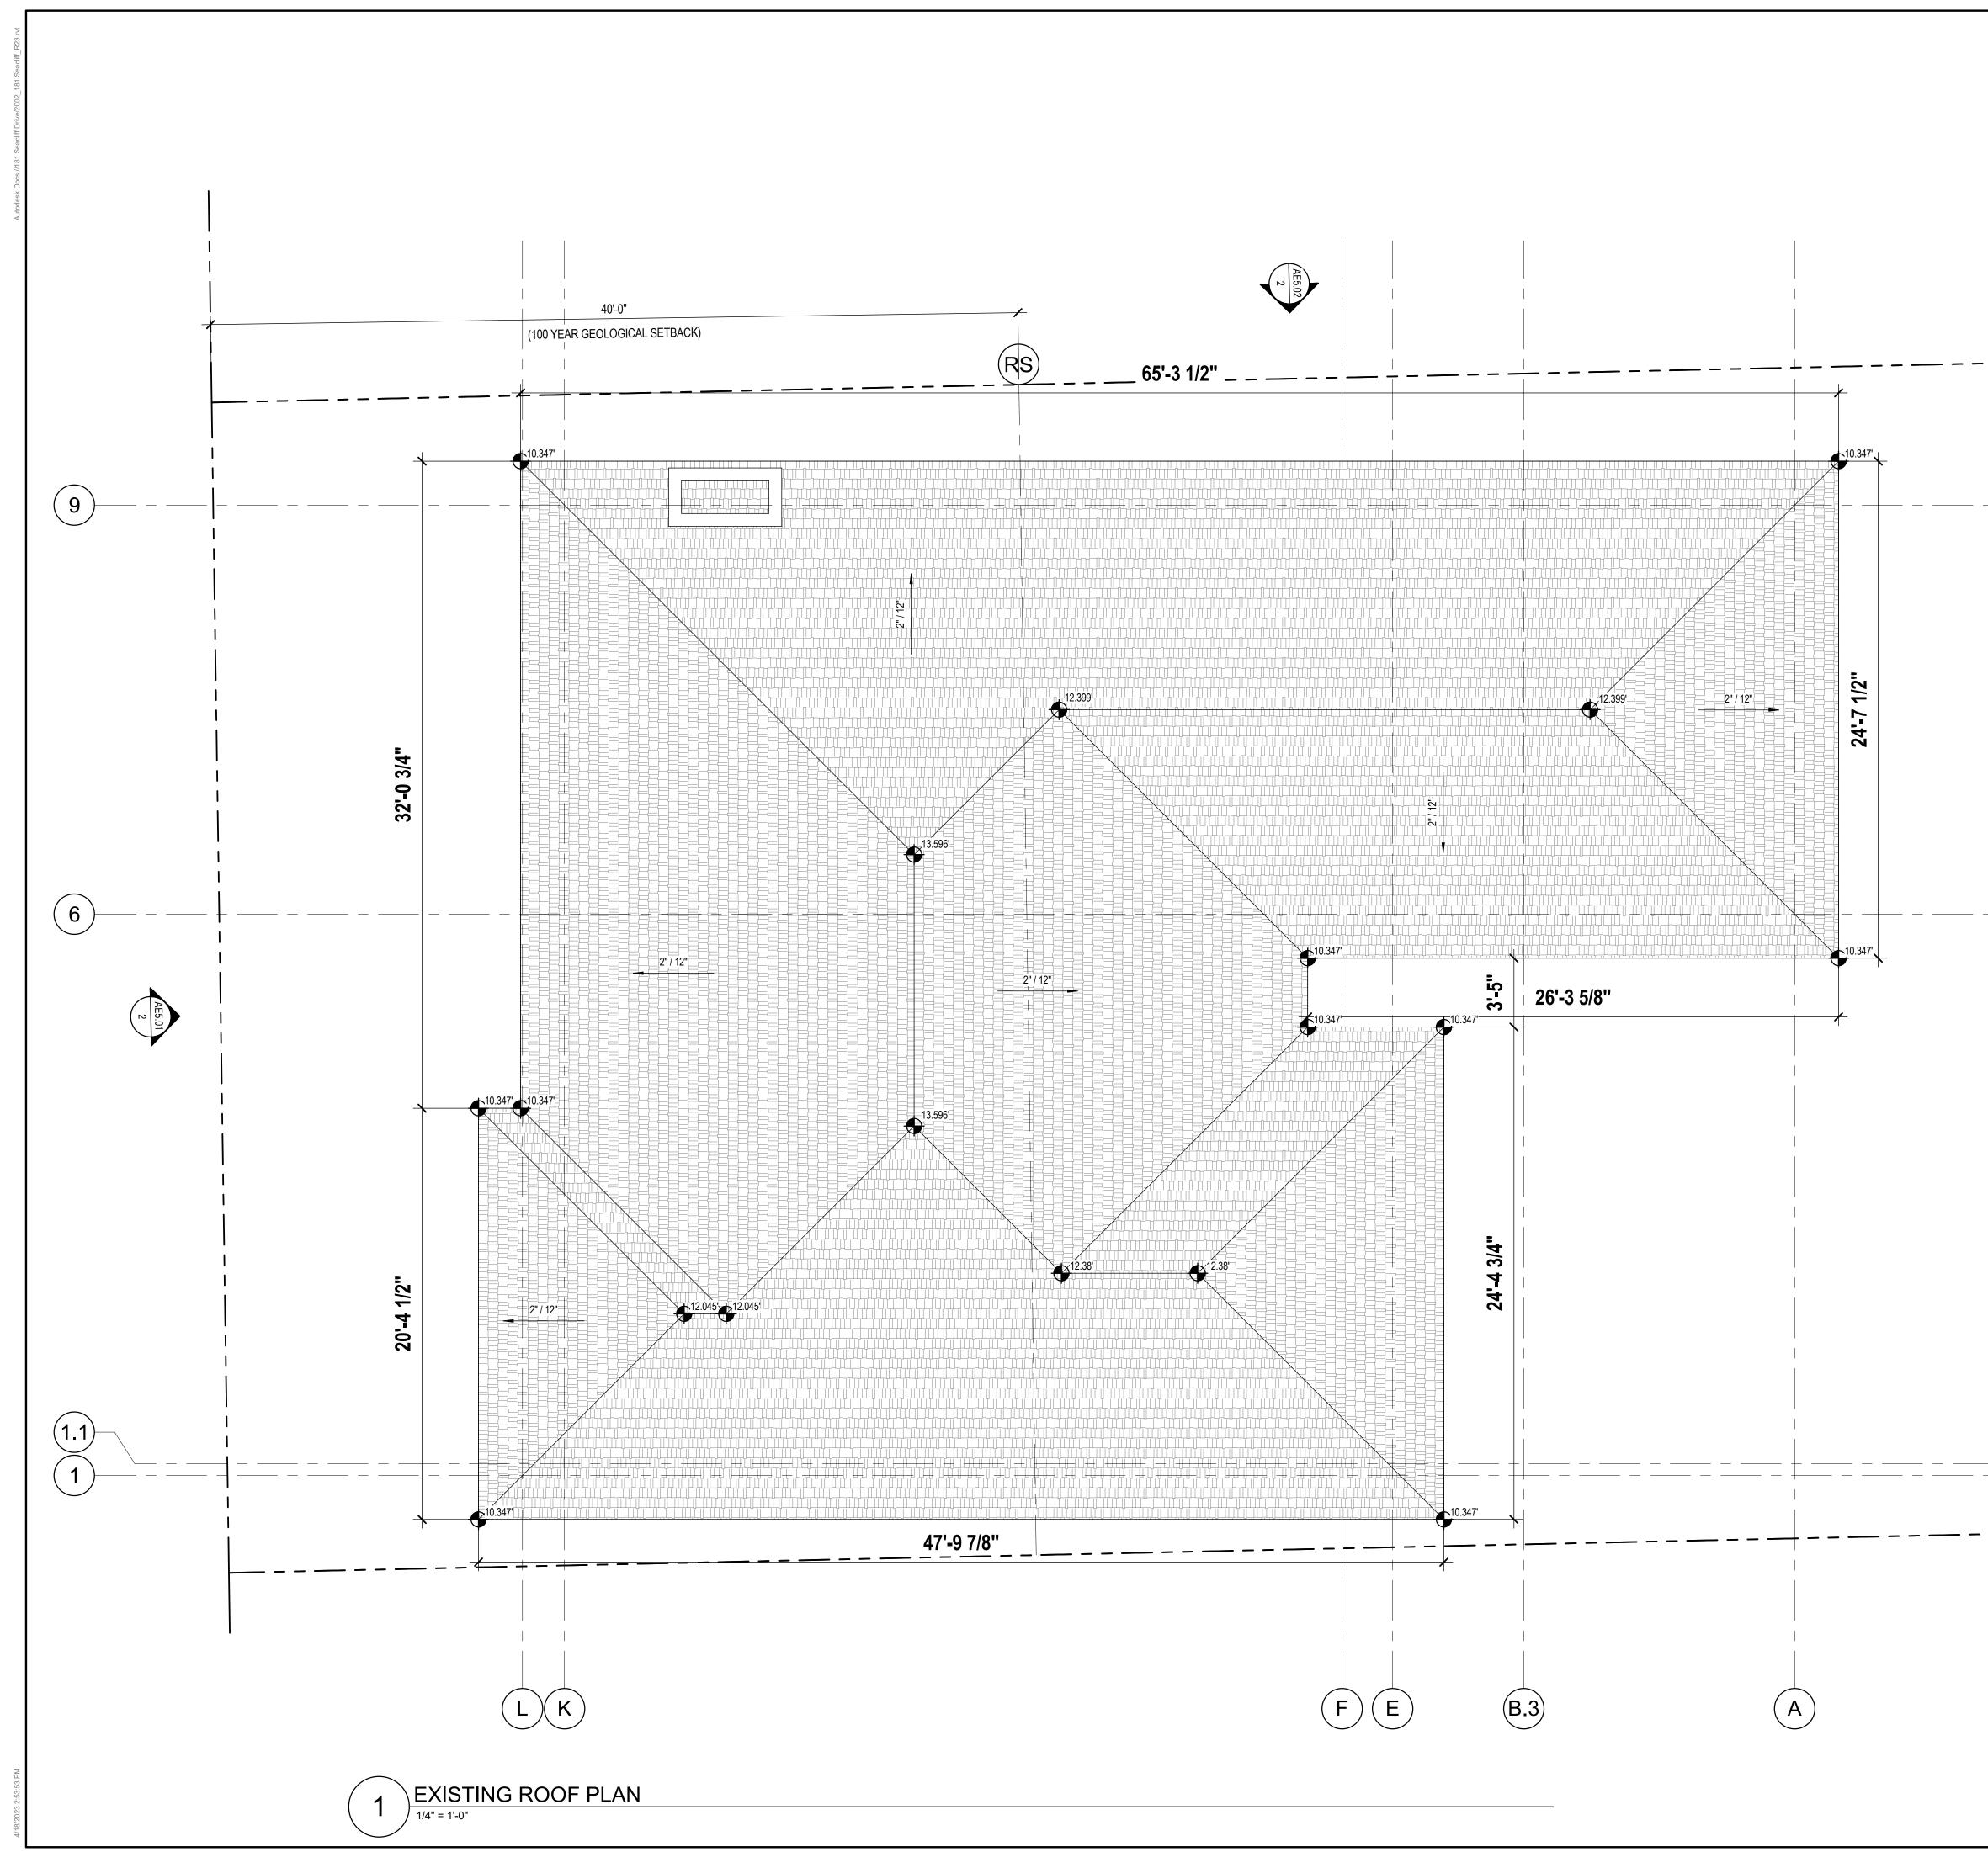

GENERAL NOTES 1. ALL DIMENSIONS TO FINISH FACE OF WALL U.O.N. 2. V.I.F. ALL (E) DIMENSIONS PRIOR TO CONSTRUCTION. CONTRACTOR SHALL ALERT ARCHITECT TO ANY DISCREPANCIES 3. ALL CLEAR DIMENSIONS SHALL BE EXACT WITHIN 1/8" TOLERANCE ALONG FULL HEIGHT AND FULL WIDTH OF WALLS	
	kerman morris architects LLP 139 Noe Street San Francisco, CA
PARTITION LEGEND	94114 415 749 0302
(E) PARTITION TO REMAIN	Revisions
(N) 1-HR RATED PARTITION (SEE SHEET A7.00)	
	→ C-24585 ¹⁰ → C-24585 ¹⁰
	181 SEACLIFF DRIVE
	181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06
	SANTA CRUZ COUNTY PERMIT: 211129
	ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)
	BILL AND ALYCIA KENNEDY
	NOTICE These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.
	The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.
	These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.
	All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.
	EXISTING ROOF PLAN
	DATE 04/18/2023
	SCALE As indicated
	DRAWN BY Author
Ι	CHECKED BY Checker
	JOB NO. 2002
	AE2.02

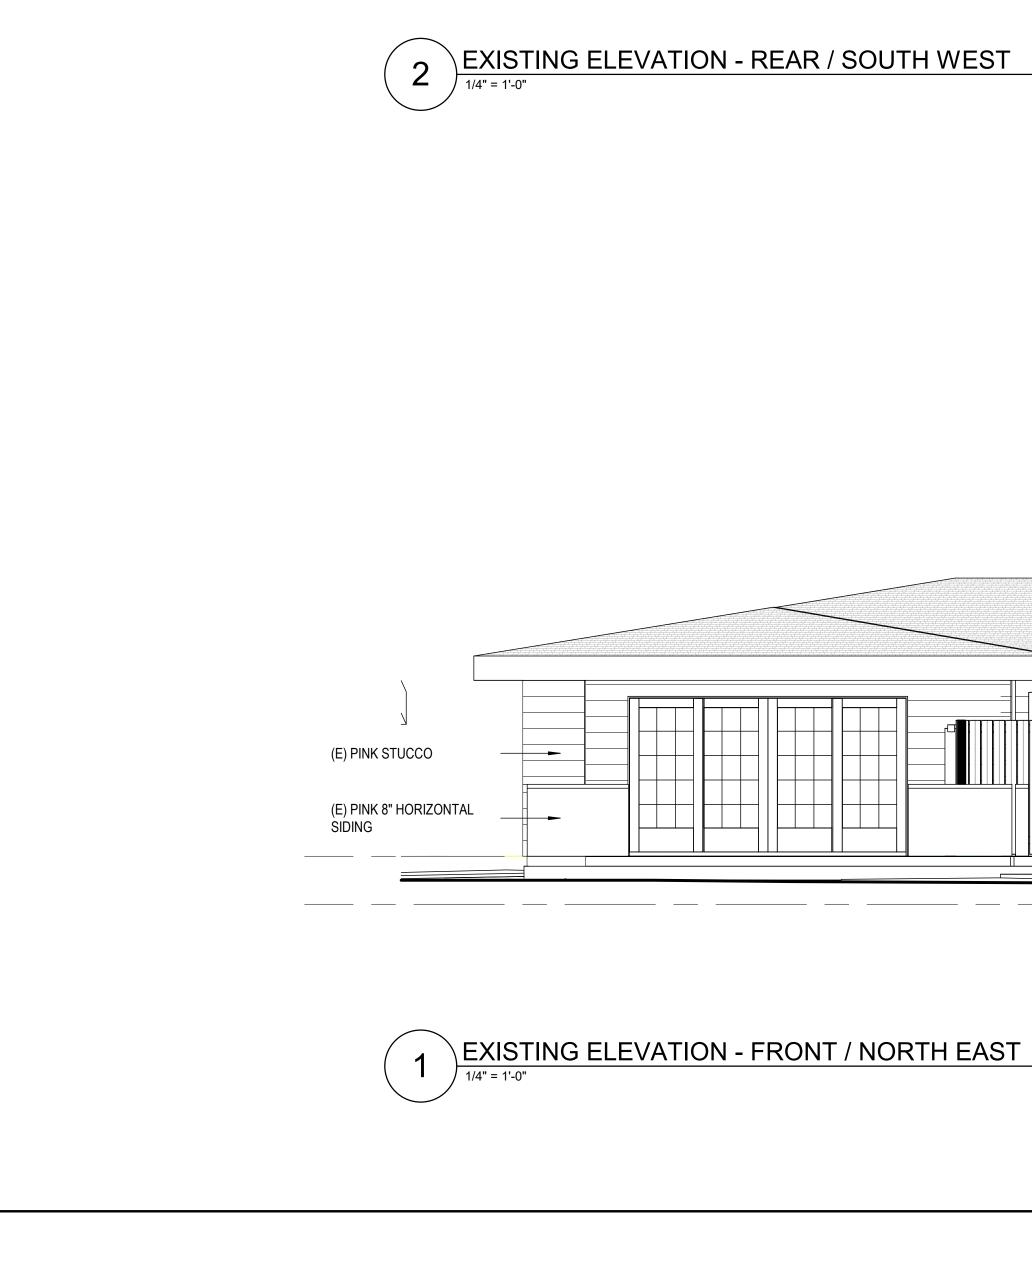



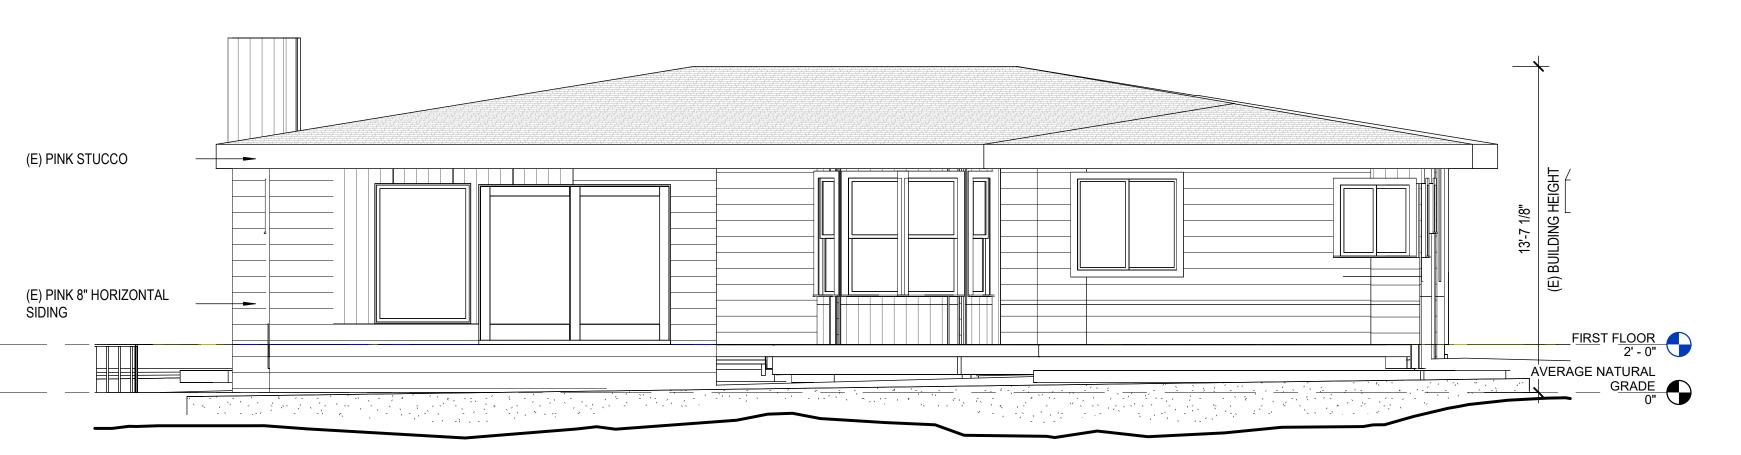





139 Noe Street San Francisco, CA 94114 415 749 0302





181 SEACLIFF DRIVE

181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06

SANTA CRUZ COUNTY PERMIT: 211129

ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)

BILL AND ALYCIA KENNEDY

NOTICE

These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.

The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.


These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.

All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.





DATE	04/18/2023
SCALE	1/4" = 1'-0"
DRAWN BY	Author
CHECKED BY	Checker
JOB NO.	2002







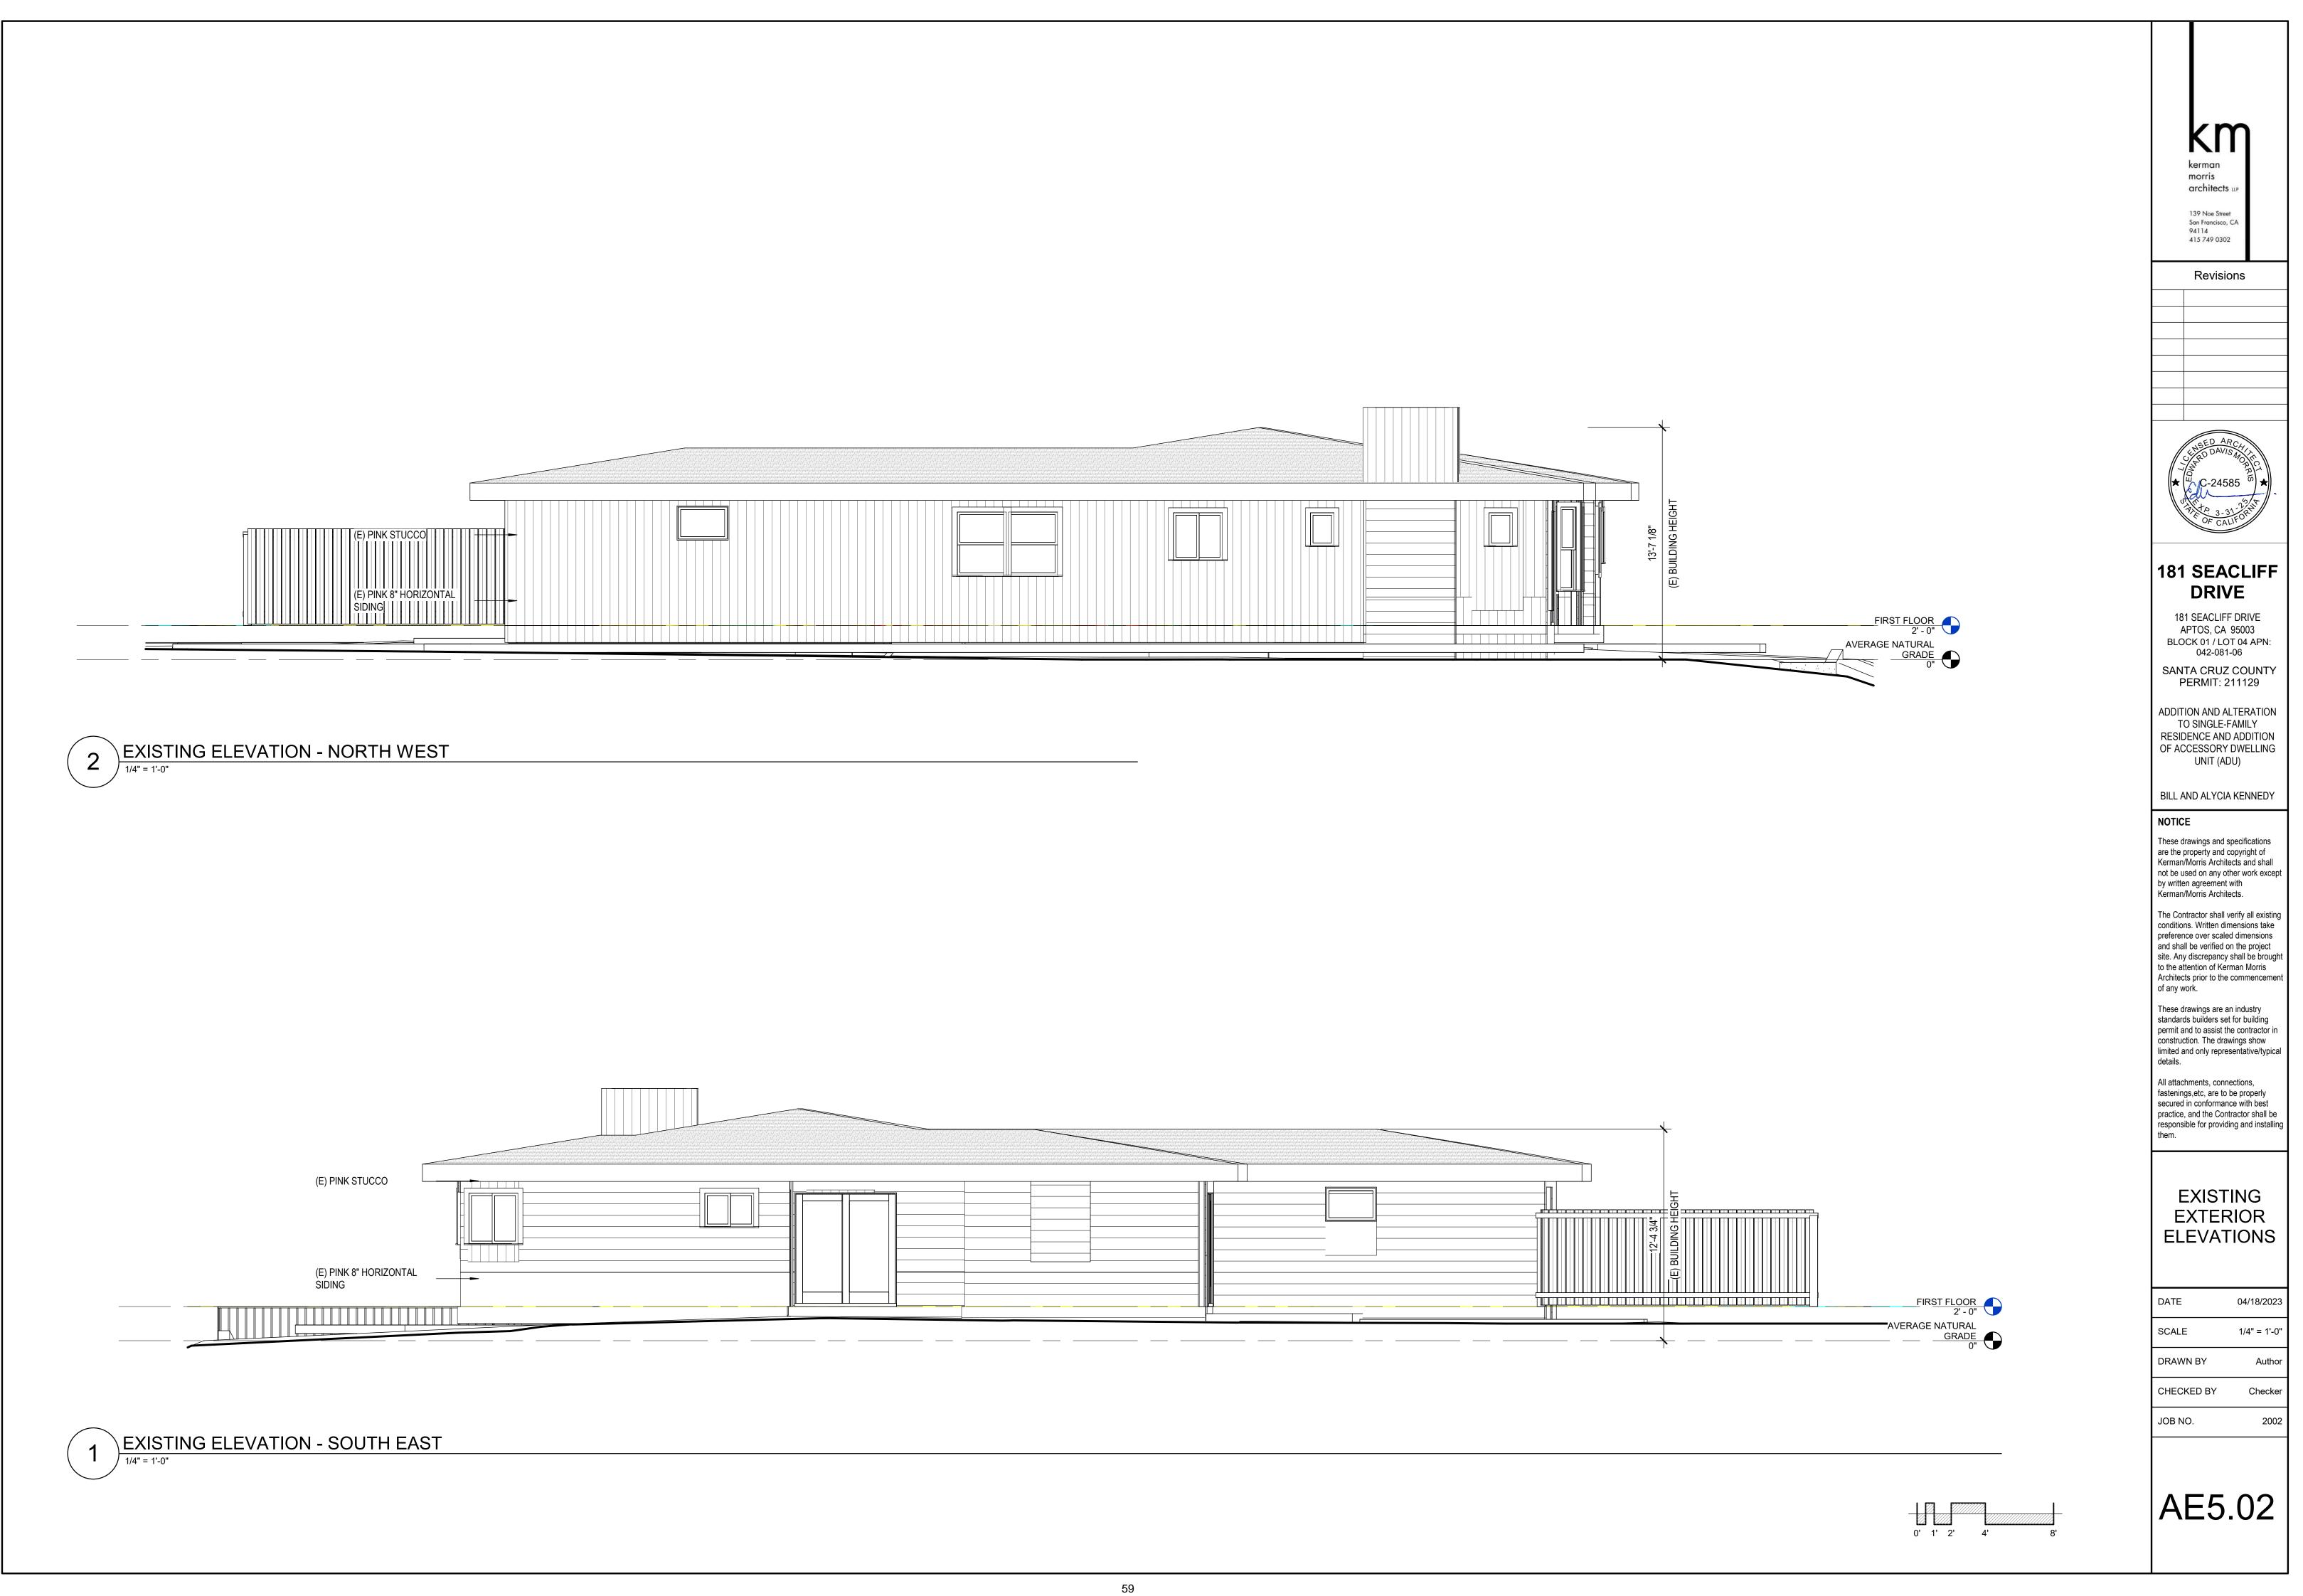

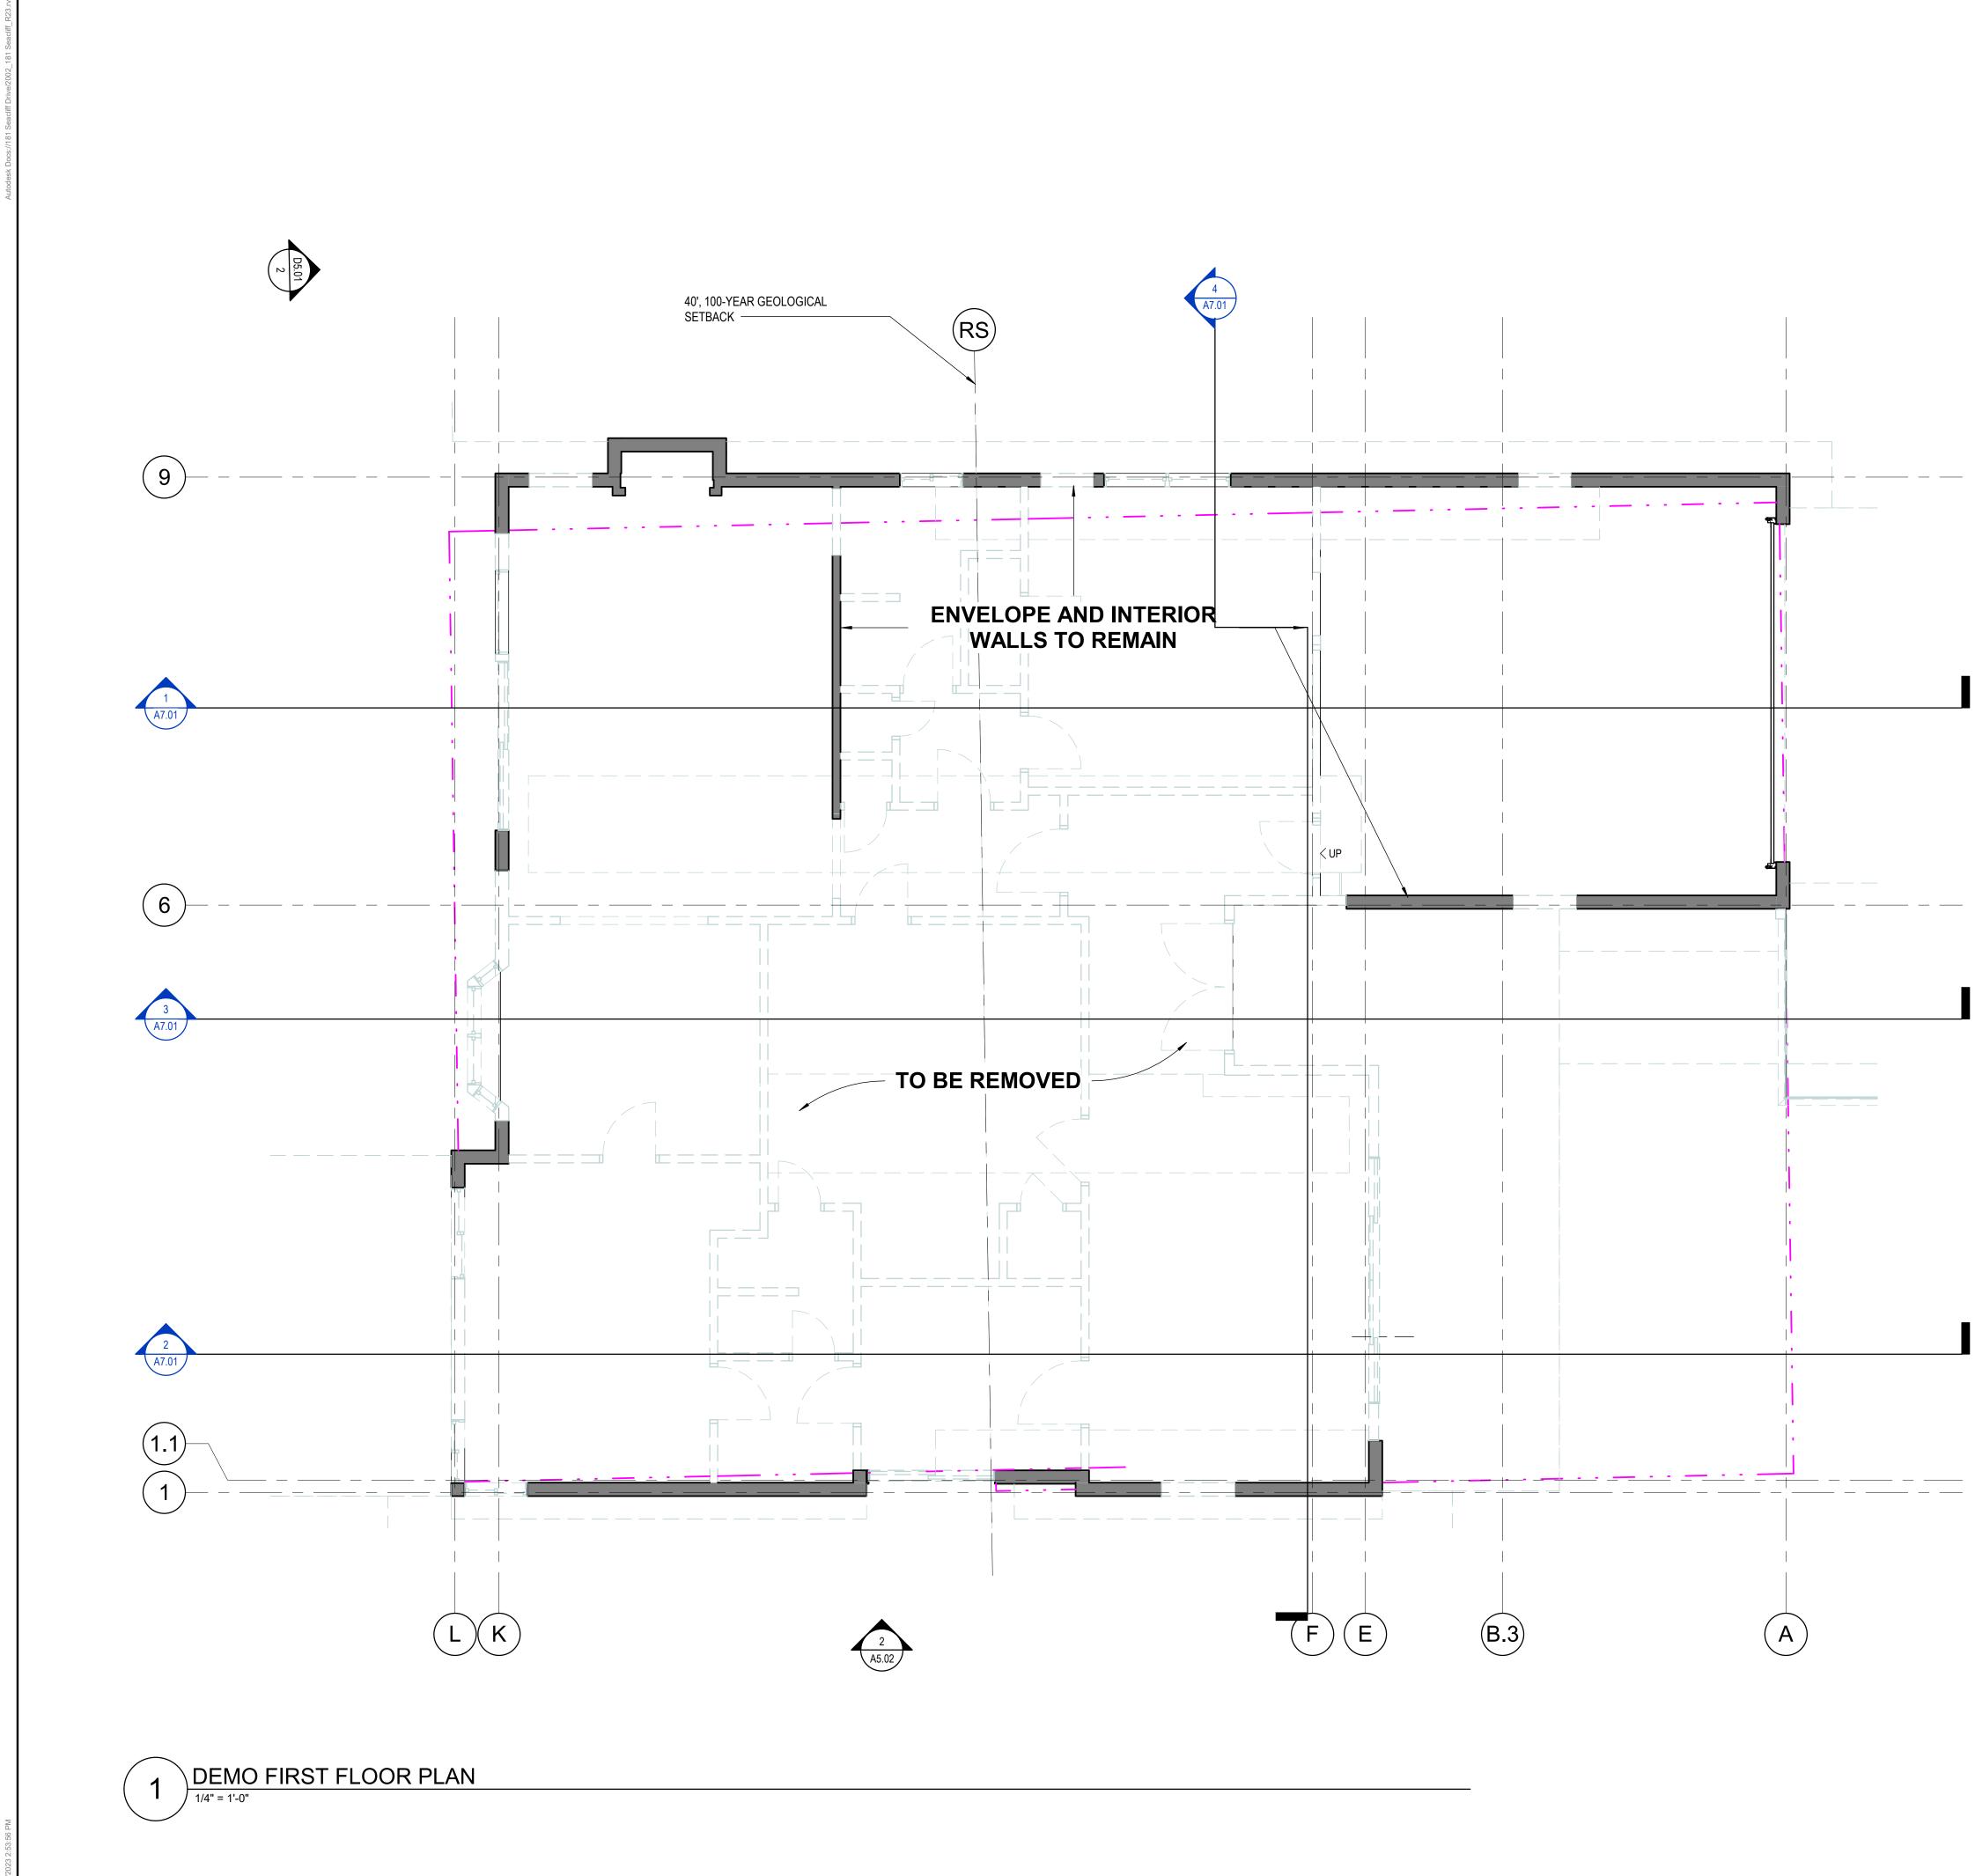

DEMO PLAN LEGEND

GENERAL NOTES ALL DIMENSIONS TO FINISH FACE OF WALL U.O.N. V.I.F. ALL (E) DIMENSIONS PRIOR TO CONSTRUCTION. CONTRACTOR SHALL ALERT ARCHITECT TO ANY DISCREPANCIES

3. ALL CLEAR DIMENSIONS SHALL BE EXACT WITHIN 1/8" TOLERANCE ALONG FULL HEIGHT AND FULL WIDTH OF WALLS

PARTITION LEGEND

_____ ___ (E) WALL / PARTITION TO BE REMOVED

(E) WALL TO REMAIN



km kerman morris architects up 139 Noe Street San Francisco, CA 94114 415 749 0302 Revisions ED AR **★** ([₩]_ C-24585 181 SEACLIFF DRIVE 181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06 SANTA CRUZ COUNTY PERMIT: 211129

ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)

BILL AND ALYCIA KENNEDY


NOTICE

These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.


The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.


These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.

All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.

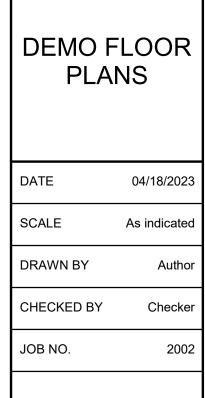

D2.01



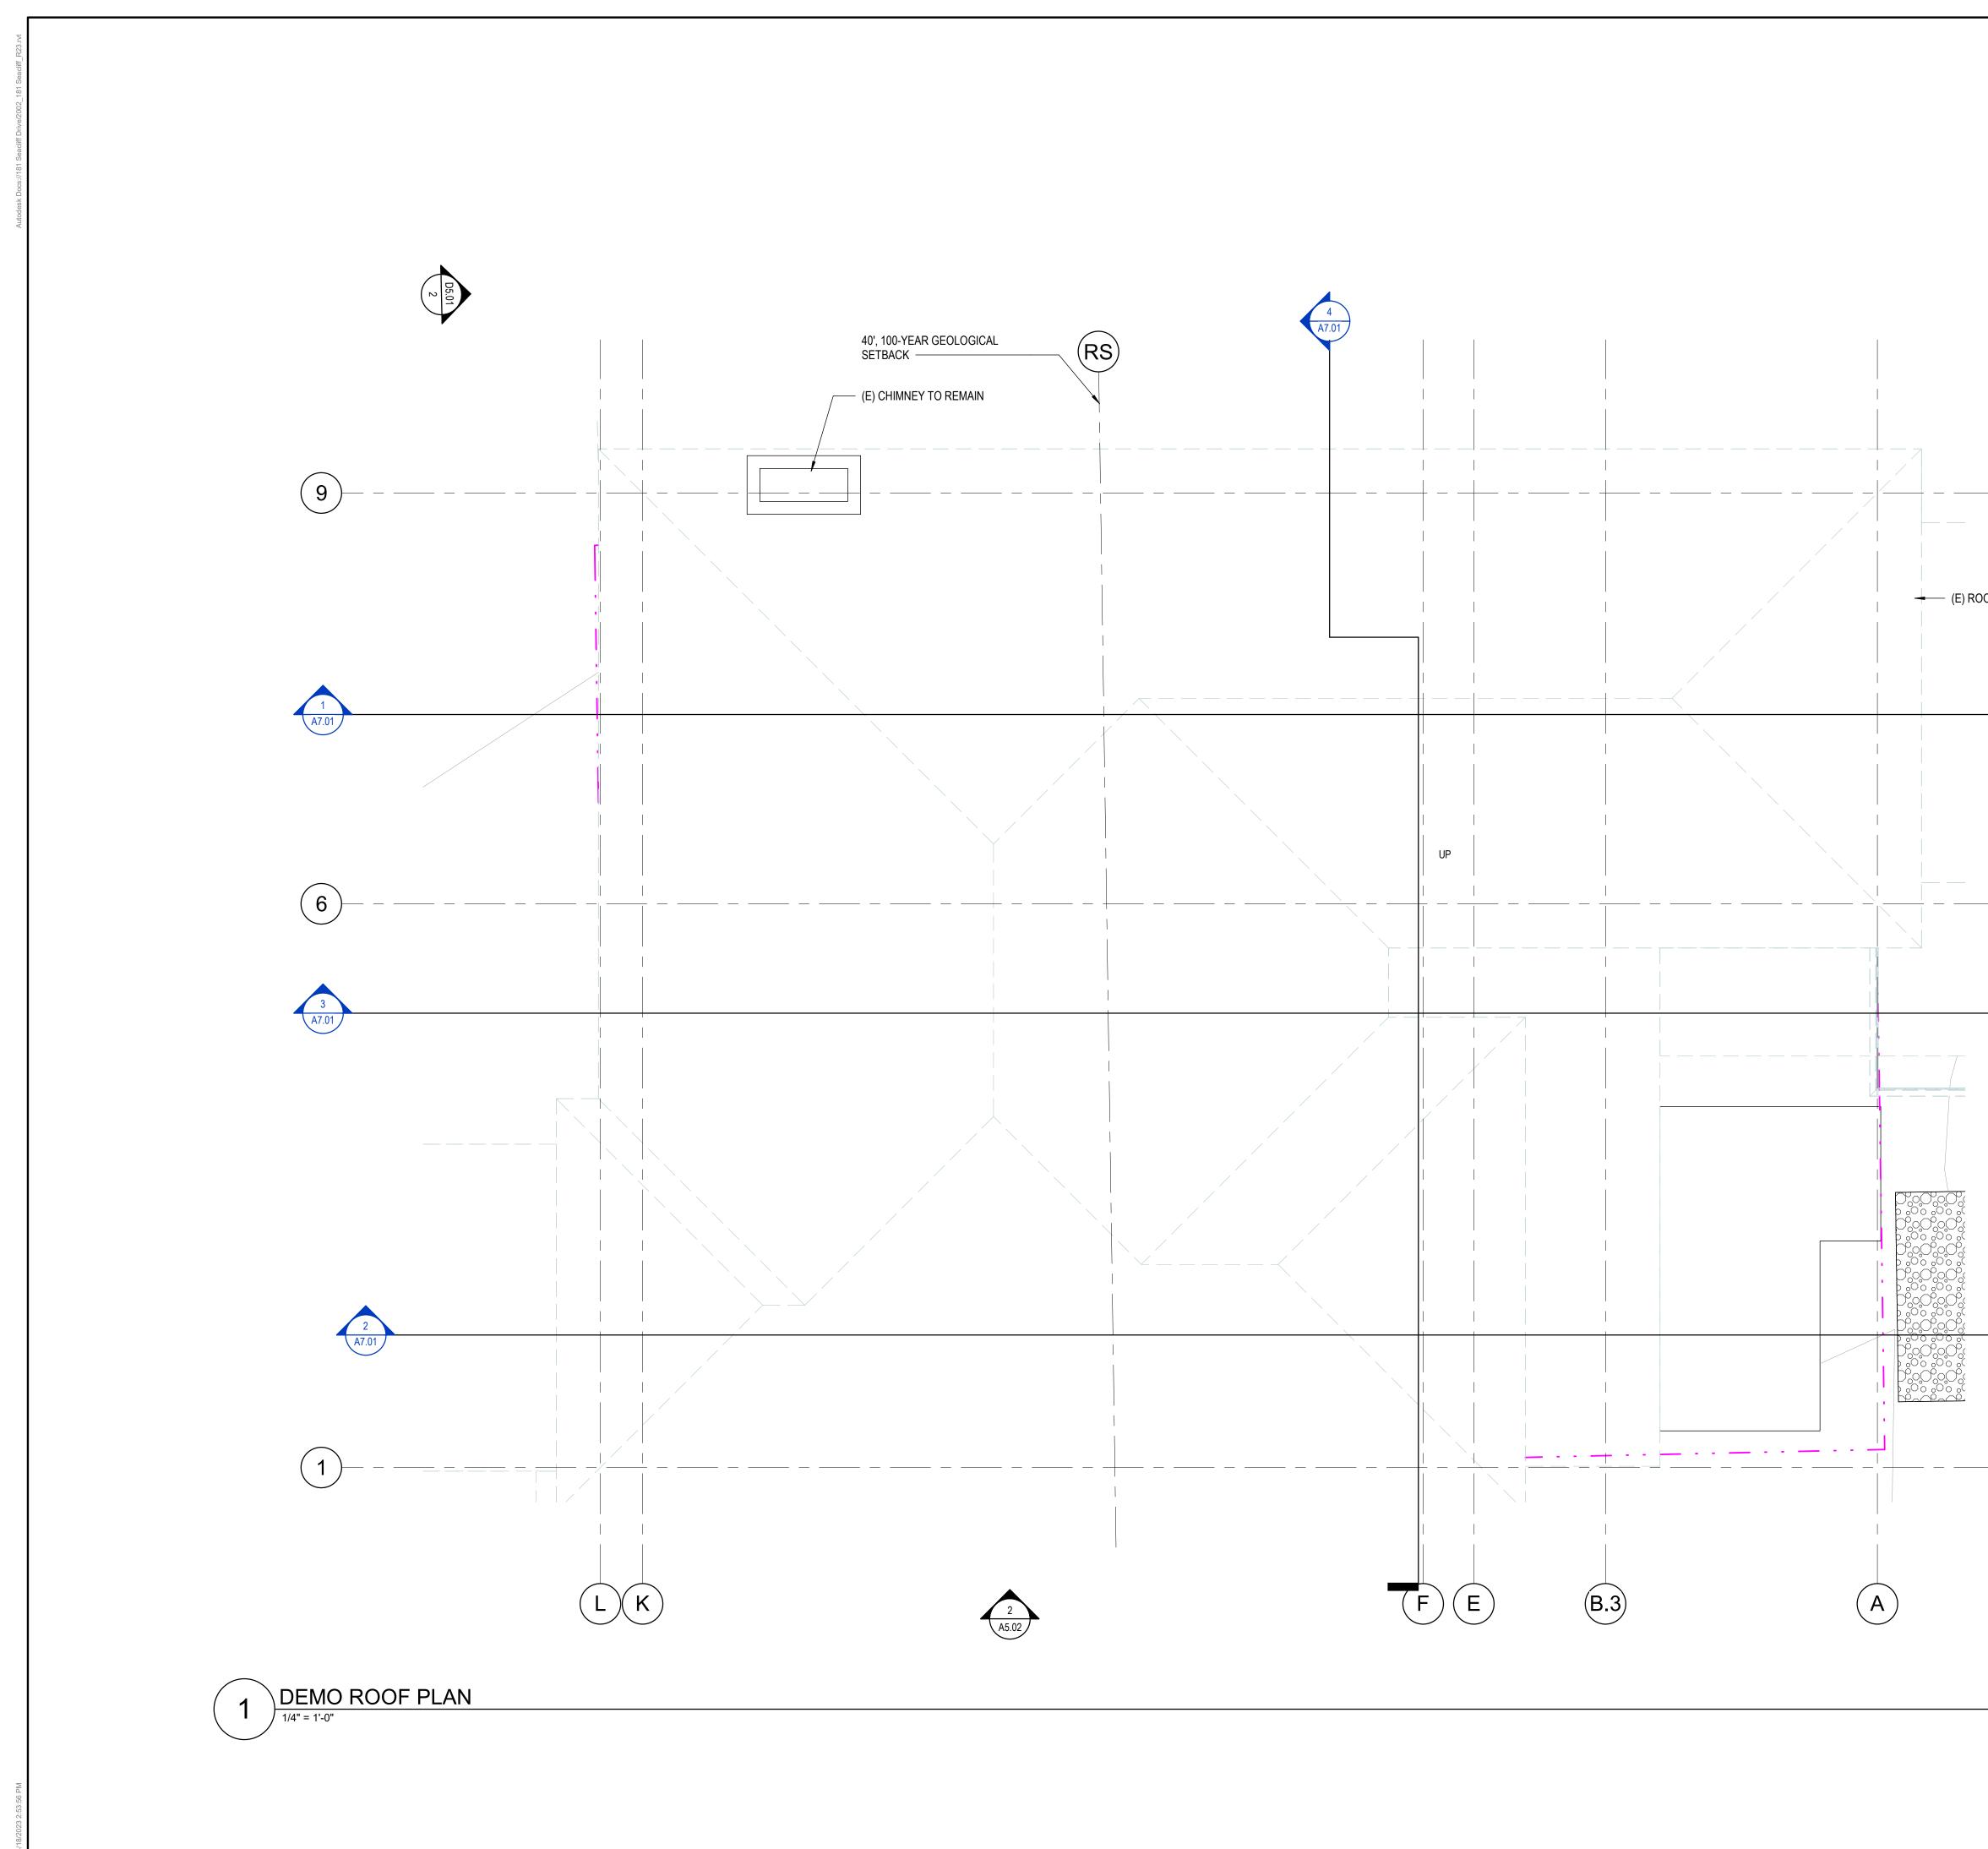

(E) ROOF AND ROOF FRAMING TO BE REMOVED

1 A5.01 ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU) BILL AND ALYCIA KENNEDY

km

kerman morris architects ur

139 Noe Street San Francisco, CA 94114 415 749 0302

Revisions

ED AR

^w C-24585

181 SEACLIFF

DRIVE

181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06

SANTA CRUZ COUNTY PERMIT: 211129

These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.

NOTICE

The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.


These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.


All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.

DEMO ROOF PLANS

DATE	04/18/2023
SCALE	1/4" = 1'-0"
DRAWN BY	Author
CHECKED BY	Checker
JOB NO.	2002

D2.02



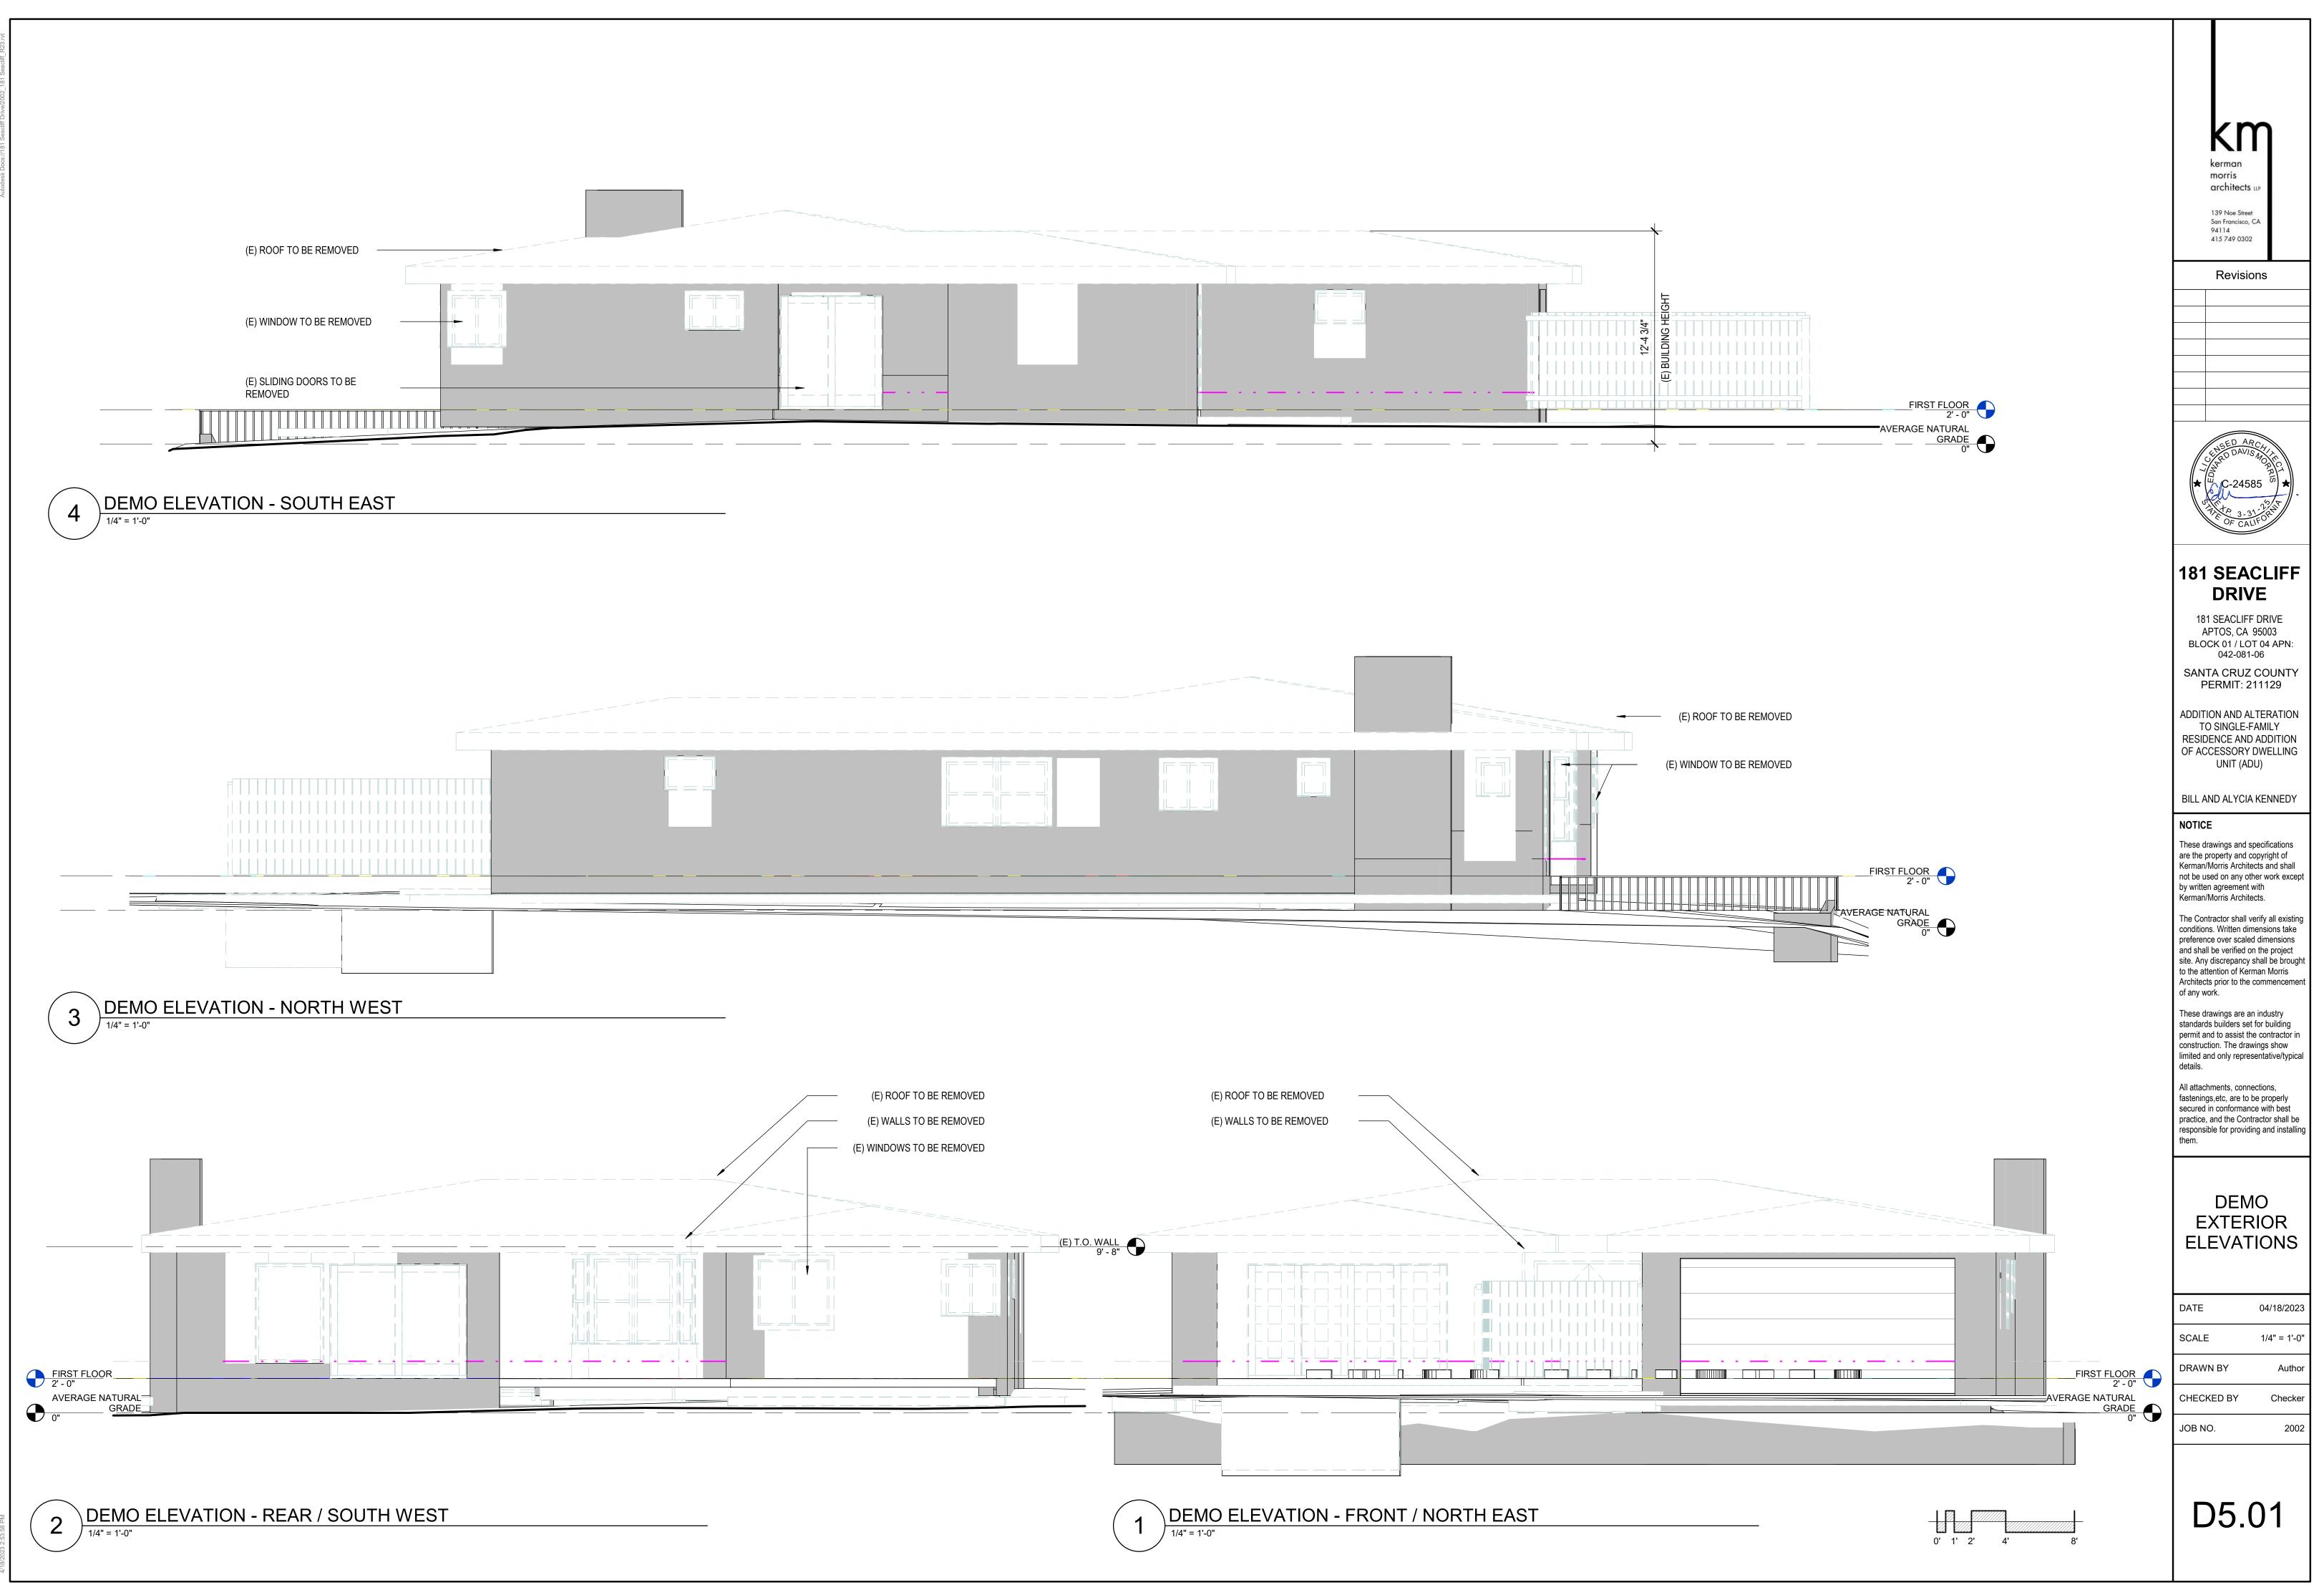



Autodesk Docs://181 Seacliff Drive/2002_181 Seacliff_R23.rvt

GENERAL NOTES

A. GENERAL NOTES:

- 1. THE CONTRACTOR SHALL PROVIDE COMPLETE PROJECT SYSTEMS AND COMPONENTS AND COMPLY WITH ALL REQUIREMENTS INDICATED ON THE PROJECT DOCUMENTS.
- 2. WORK WITHIN THE AREA BOUNDARIES INDICATED IN THE PROJECT DOCUMENTS AND COMPLY WITH ALL APPLICABLE BUILDING CODE, REGULATION, & ORDINANCE REQUIREMENTS. OCCUPANTS ADJACENT TO THE PROJECT AREA BOUNDARIES SHALL CONTINUE UNINTERRUPTED OCCUPANCY DURING CONSTRUCTION OF THE PROJECT.
- 3. VERIFY FIELD CONDITIONS AND COORDINATION WITH THE PROJECT DOCUMENTS PRIOR TO PROCEEDING WITH THE WORK.
- 4. COORDINATE THE WORK WITH ALL REQUIREMENTS INDICATED IN THE PROJECT DOCUMENTS.
- 5. PERFORM THE WORK AT THE PROJECT SITE DURING NORMAL BUSINESS HOURS, UNLESS OTHERWISE NOTED.
- 6. COORDINATE THE WORK WITH EQUIPMENT, FURNISHINGS AND SYSTEMS PROVIDED BY THE OWNER.

B. DEFINITIONS:

- 1. "TYPICAL" OR "TYP" INDICATES IDENTICAL COMPLETE SYSTEM SHALL BE PROVIDED FOR EACH OCCURRENCE
- OF THE CONDITION NOTED. 2. "SIMILAR" INDICATES COMPLETE SYSTEM AND COMPONENTS SHALL BE PROVIDED COMPARABLE TO THE
- CHARACTERISTICS FOR THE CONDITION NOTED.
- 3. "AS REQUIRED" INDICATES COMPONENTS REQUIRED TO COMPLETE THE NOTED, SYSTEM AS INDICATED IN THE PROJECT DOCUMENTS, SHALL BE PROVIDED
- "ALIGN" INDICATES ACCURATELY PROVIDE FINISH FACES OF MATERIALS IN STRAIGHT, TRUE AND PLUMB RELATION TO ADJACENT MATERIALS.

C. DIMENSIONS:

- 1. DIMENSIONS ARE INDICATED TO THE CENTERLINE OF THE STRUCTURAL GRID, FACE OF CONCRETE WALL, NOMINAL FACE OF CMU WALL, FACE OF PARTITION AS SCHEDULED, UNLESS OTHERWISE NOTED.
- 2. ALIGNMENT OF PARTITIONS AND FINISHES AS SCHEDULED SHALL BE STRAIGHT, TRUE & PLUMB. THE PRIORITY FOR PROJECT DIMENSIONS SHALL BE IN THE FOLLOWING ORDER:
- A. STRUCTURAL DRAWINGS
- B. LARGE SCALE DETAILSC. SMALL SCALE DETAILS
- D. ENLARGED VIEWS
- E. FLOOR PLANS AND ELEVATIONS
- 3. MINIMUM DIMENSIONS FOR ACCESSIBILITY CLEARANCES AND BUILDING CODE REQUIREMENTS SHALL BE MAINTAINED.
- FLOOR ELEVATIONS ARE INDICATED TO THE FACE OF THE STRUCTURAL SLAB, UNLESS OTHERWISE NOTED.
 VERTICAL DIMENSIONS ARE INDICATED FROM THE FLOOR ELEVATION TO FACE OF FINISHED MATERIAL,
- UNLESS NOTED ABOVE FINISH FLOOR -"AFF".

6. CEILING HEIGHTS ARE INDICATED FROM THE FLOOR ELEVATION TO THE FACE OF SUSPENDED ACOUSTIC PANEL CEILING GRID OR FACE OF FINISH MATERIAL FOR OTHER CEILING TYPES, UON.

 DIMENSIONS SHOWN ON THE DRAWINGS SHALL INDICATE THE REQUIRED SIZE, CLEARANCE AND DIMENSIONAL RELATIONSHIP BETWEEN PROJECT SYSTEMS AND COMPONENTS. DIMENSIONS SHALL NOT BE DETERMINED BY SCALING THE DRAWINGS.

D. DRAWING SET ORGANIZATION:

- EACH DRAWING SET SHEET IS IDENTIFIED BY THE SHEET NUMBER IN THE LOWER RIGHT HAND CORNER OF THE DRAWING TITLE BLOCK. THE SHEET TITLE PROVIDES A GENERAL DESCRIPTION OF THE CONTENTS OF THE SHEET.
- SHEET NUMBER EXAMPLE: A201
- "A" INDICATES THE DISCIPLINE THAT CREATED THE DRAWING "2" INDICATES THE DRAWING CATEGORY CONTAINED ON THE SHEET
- "2" INDICATES THE DRAWING CATEGORY CONTAINED ON THE SHE "01" INDICATES THE SHEET NUMBER
- 2. SHEET NUMBERS MAY INCLUDE SUPPLEMENTAL CHARACTERS TO PROVIDE ADDITIONAL INFORMATION, SUCH AS DRAWING CONTENT, PROJECT SECTOR OR PHASE. REFER TO THE DRAWING INDEX FOR A COMPLETE LIST OF SHEETS INCLUDED IN THE DOCUMENT SET.
- EXAMPLE: EL201A "EL" INDICATES THE DISCIPLINE THAT CREATED THE DRAWING AND THE DRAWING CONTENT =
- ELECTRICAL LIGHTING "A" INDICATES SECTOR "A" OF PLAN SHEET "201". REFER TO THE PROJECT KEY PLAN OR COMPOSITE PLAN INDICATING THE RELATIONSHIP OF THE SECTORS.
- DRAWING SET INDEX INDICATES THE COMPLETE LIST OF SHEETS CONTAINED IN THE DRAWING SET, INDEXED BY DISCIPLINE, SHEET NUMBER AND SHEET TITLE, IN SEQUENTIAL ORDER. NOTE THAT ALL SEQUENTIAL SHEET NUMBERS MAY BE NOT USED IN THE DRAWING SET.
- DISCIPLINE IDENTIFICATION, IN ORDER BOUND IN THE DRAWING SET. REFER TO THE DRAWING SET INDEX FOR DISCIPLINE CONTAINED IN THIS DRAWING SET:
- G GENERAL INFORMATION Q EQUIPMENT C CIVIL F FIRE PROTEC
- C CIVIL F FIRE PROTECTION L LANDSCAPE P PLUMBING
- S STRUCTURAL A ARCHITECTURAL

I INTERIORS

- M MECHANICAL E ELECTRICAL
- T TELECOMMUNICATIONS

5. DRAWING CATEGORY IDENTIFICATION. REFER TO THE DRAWING SET INDEX FOR DISCIPLINES, CATEGORIES AND SHEET NUMBERS CONTAINED IN THIS DRAWING SET:

kerman morris architects up

139 Noe Street San Francisco, CA 94114 415 749 0302

Revisions

181 SEACLIFF DRIVE

181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN: 042-081-06

SANTA CRUZ COUNTY PERMIT: 211129

ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)

BILL AND ALYCIA KENNEDY

NOTICE

These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.

The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.


These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.

All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.


	ERAL TES
DATE	04/18/2023
SCALE	1" = 1'-0"

DRAWN BY	DRN
CHECKED BY	СНК
JOB NO.	2002

A0.01

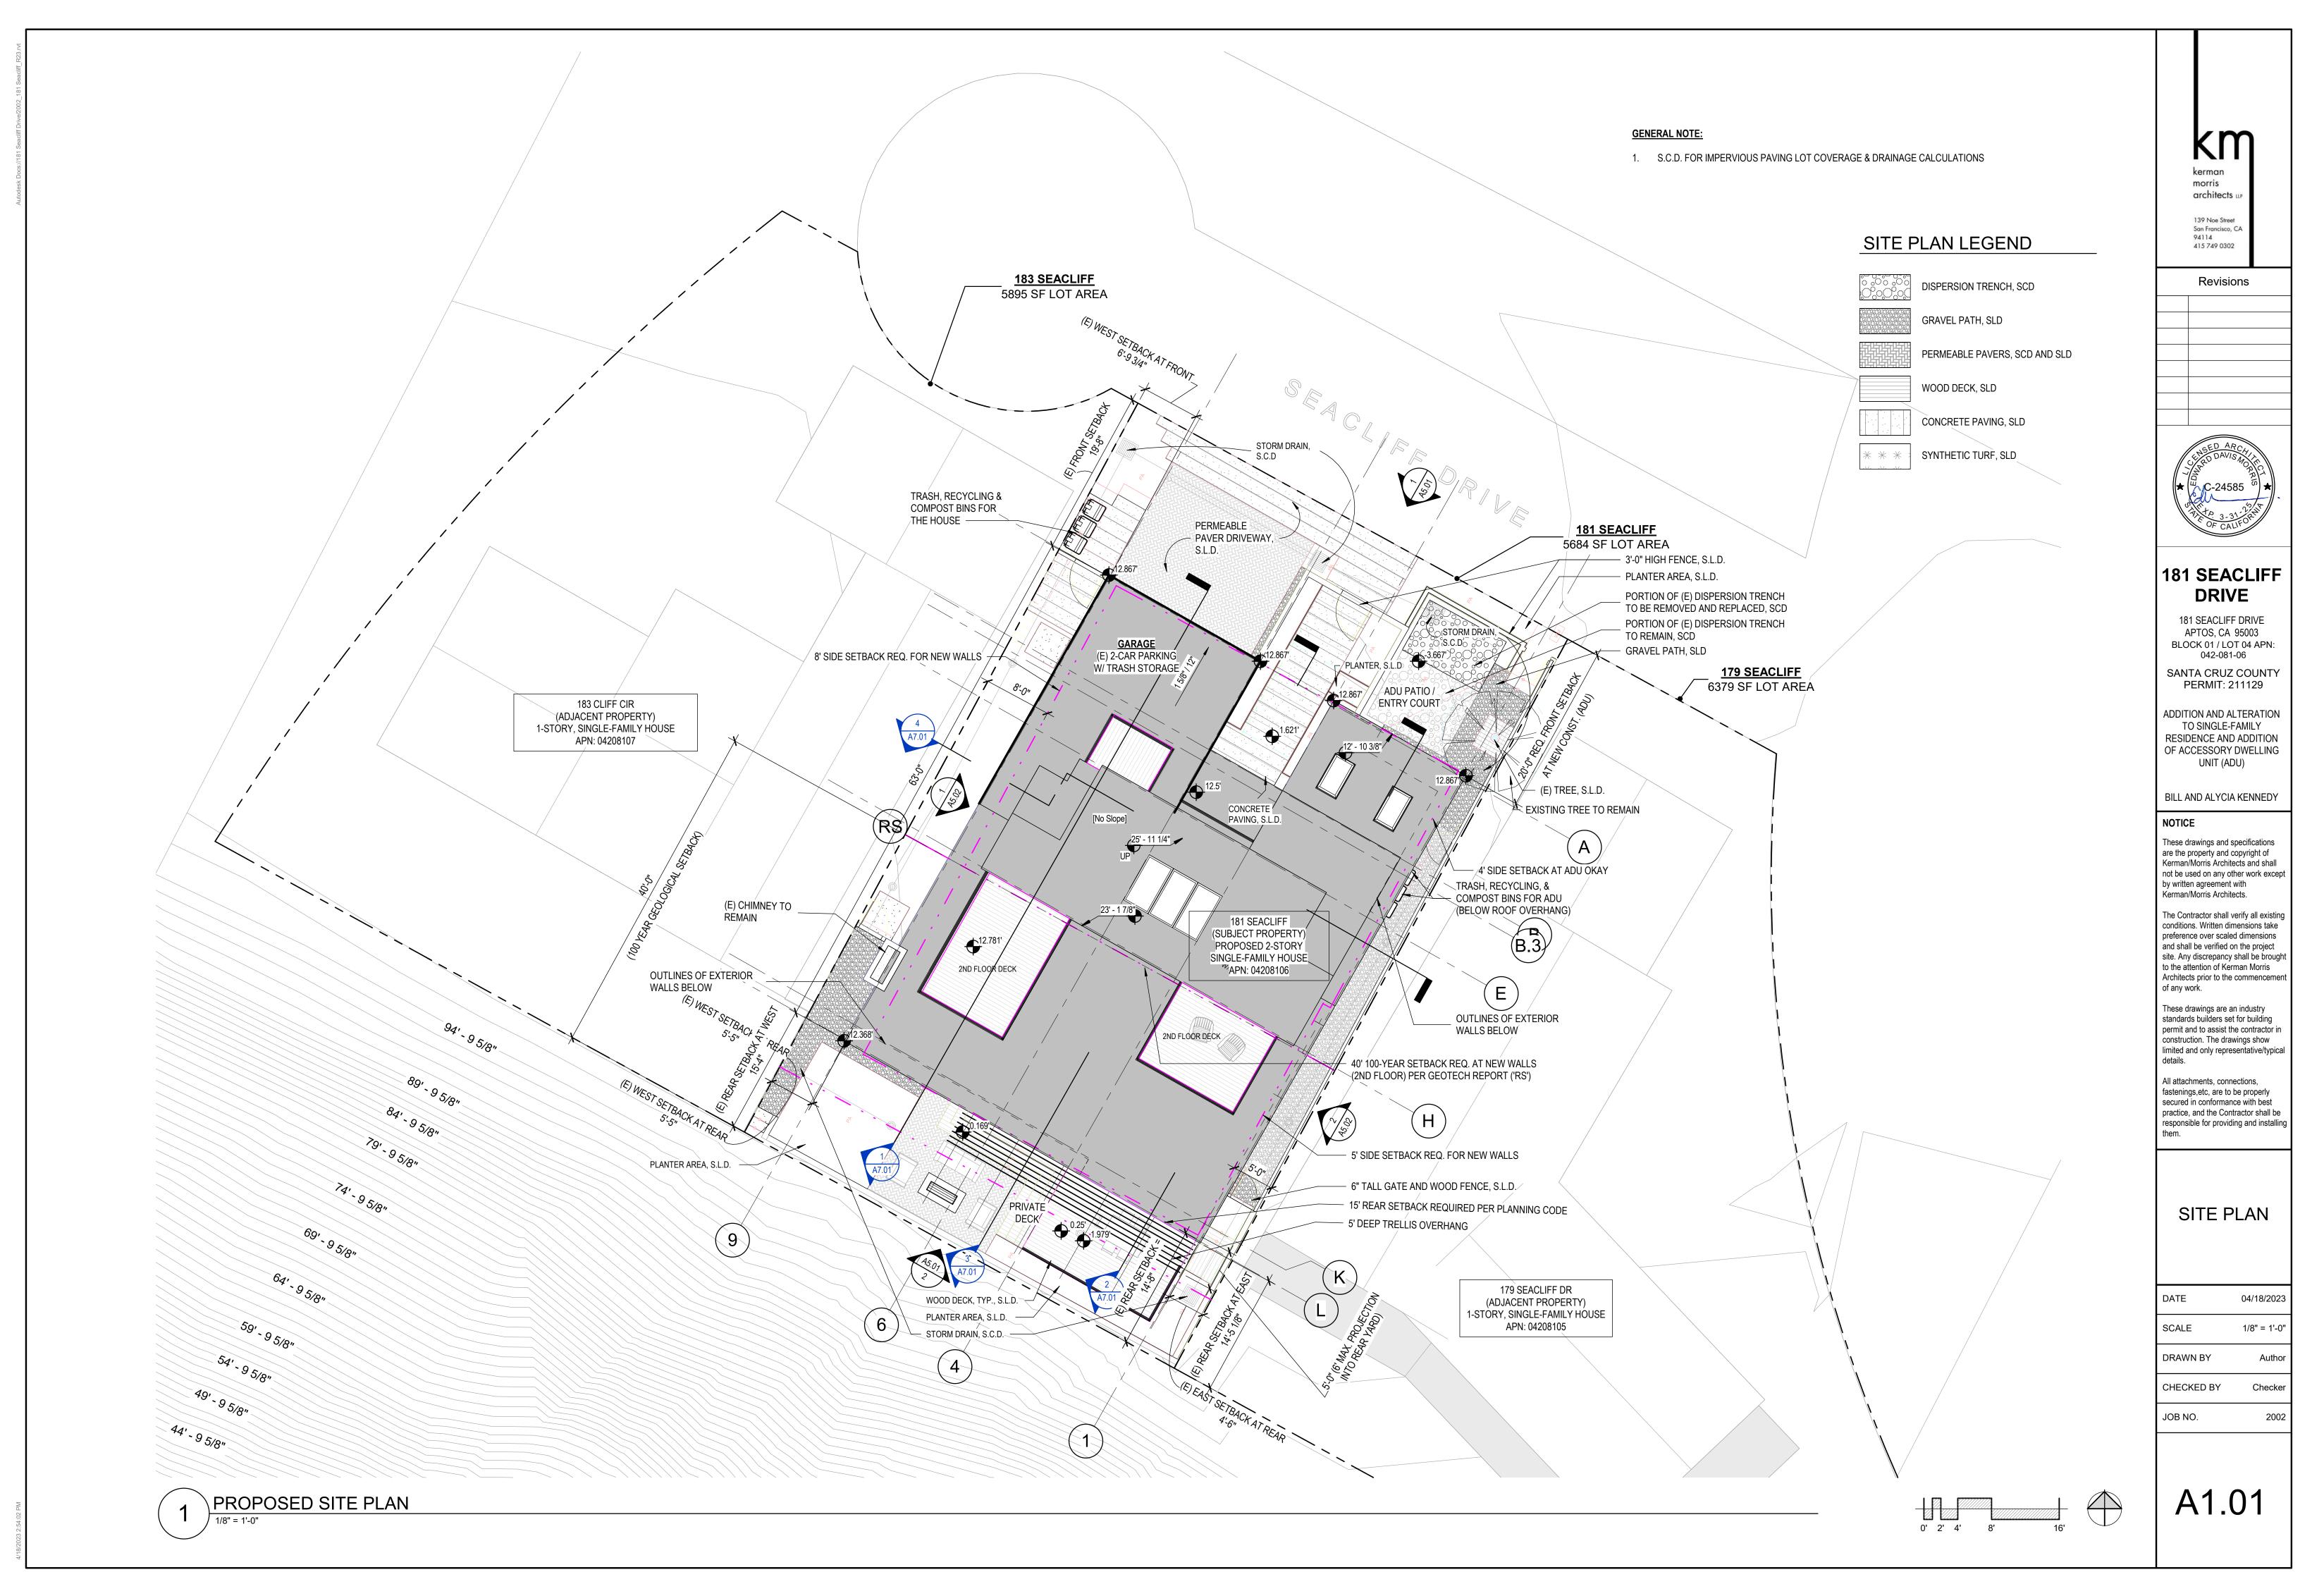

utodesk Docs://181 Seacliff Drive/2002_181 Seacliff_R23.rvt

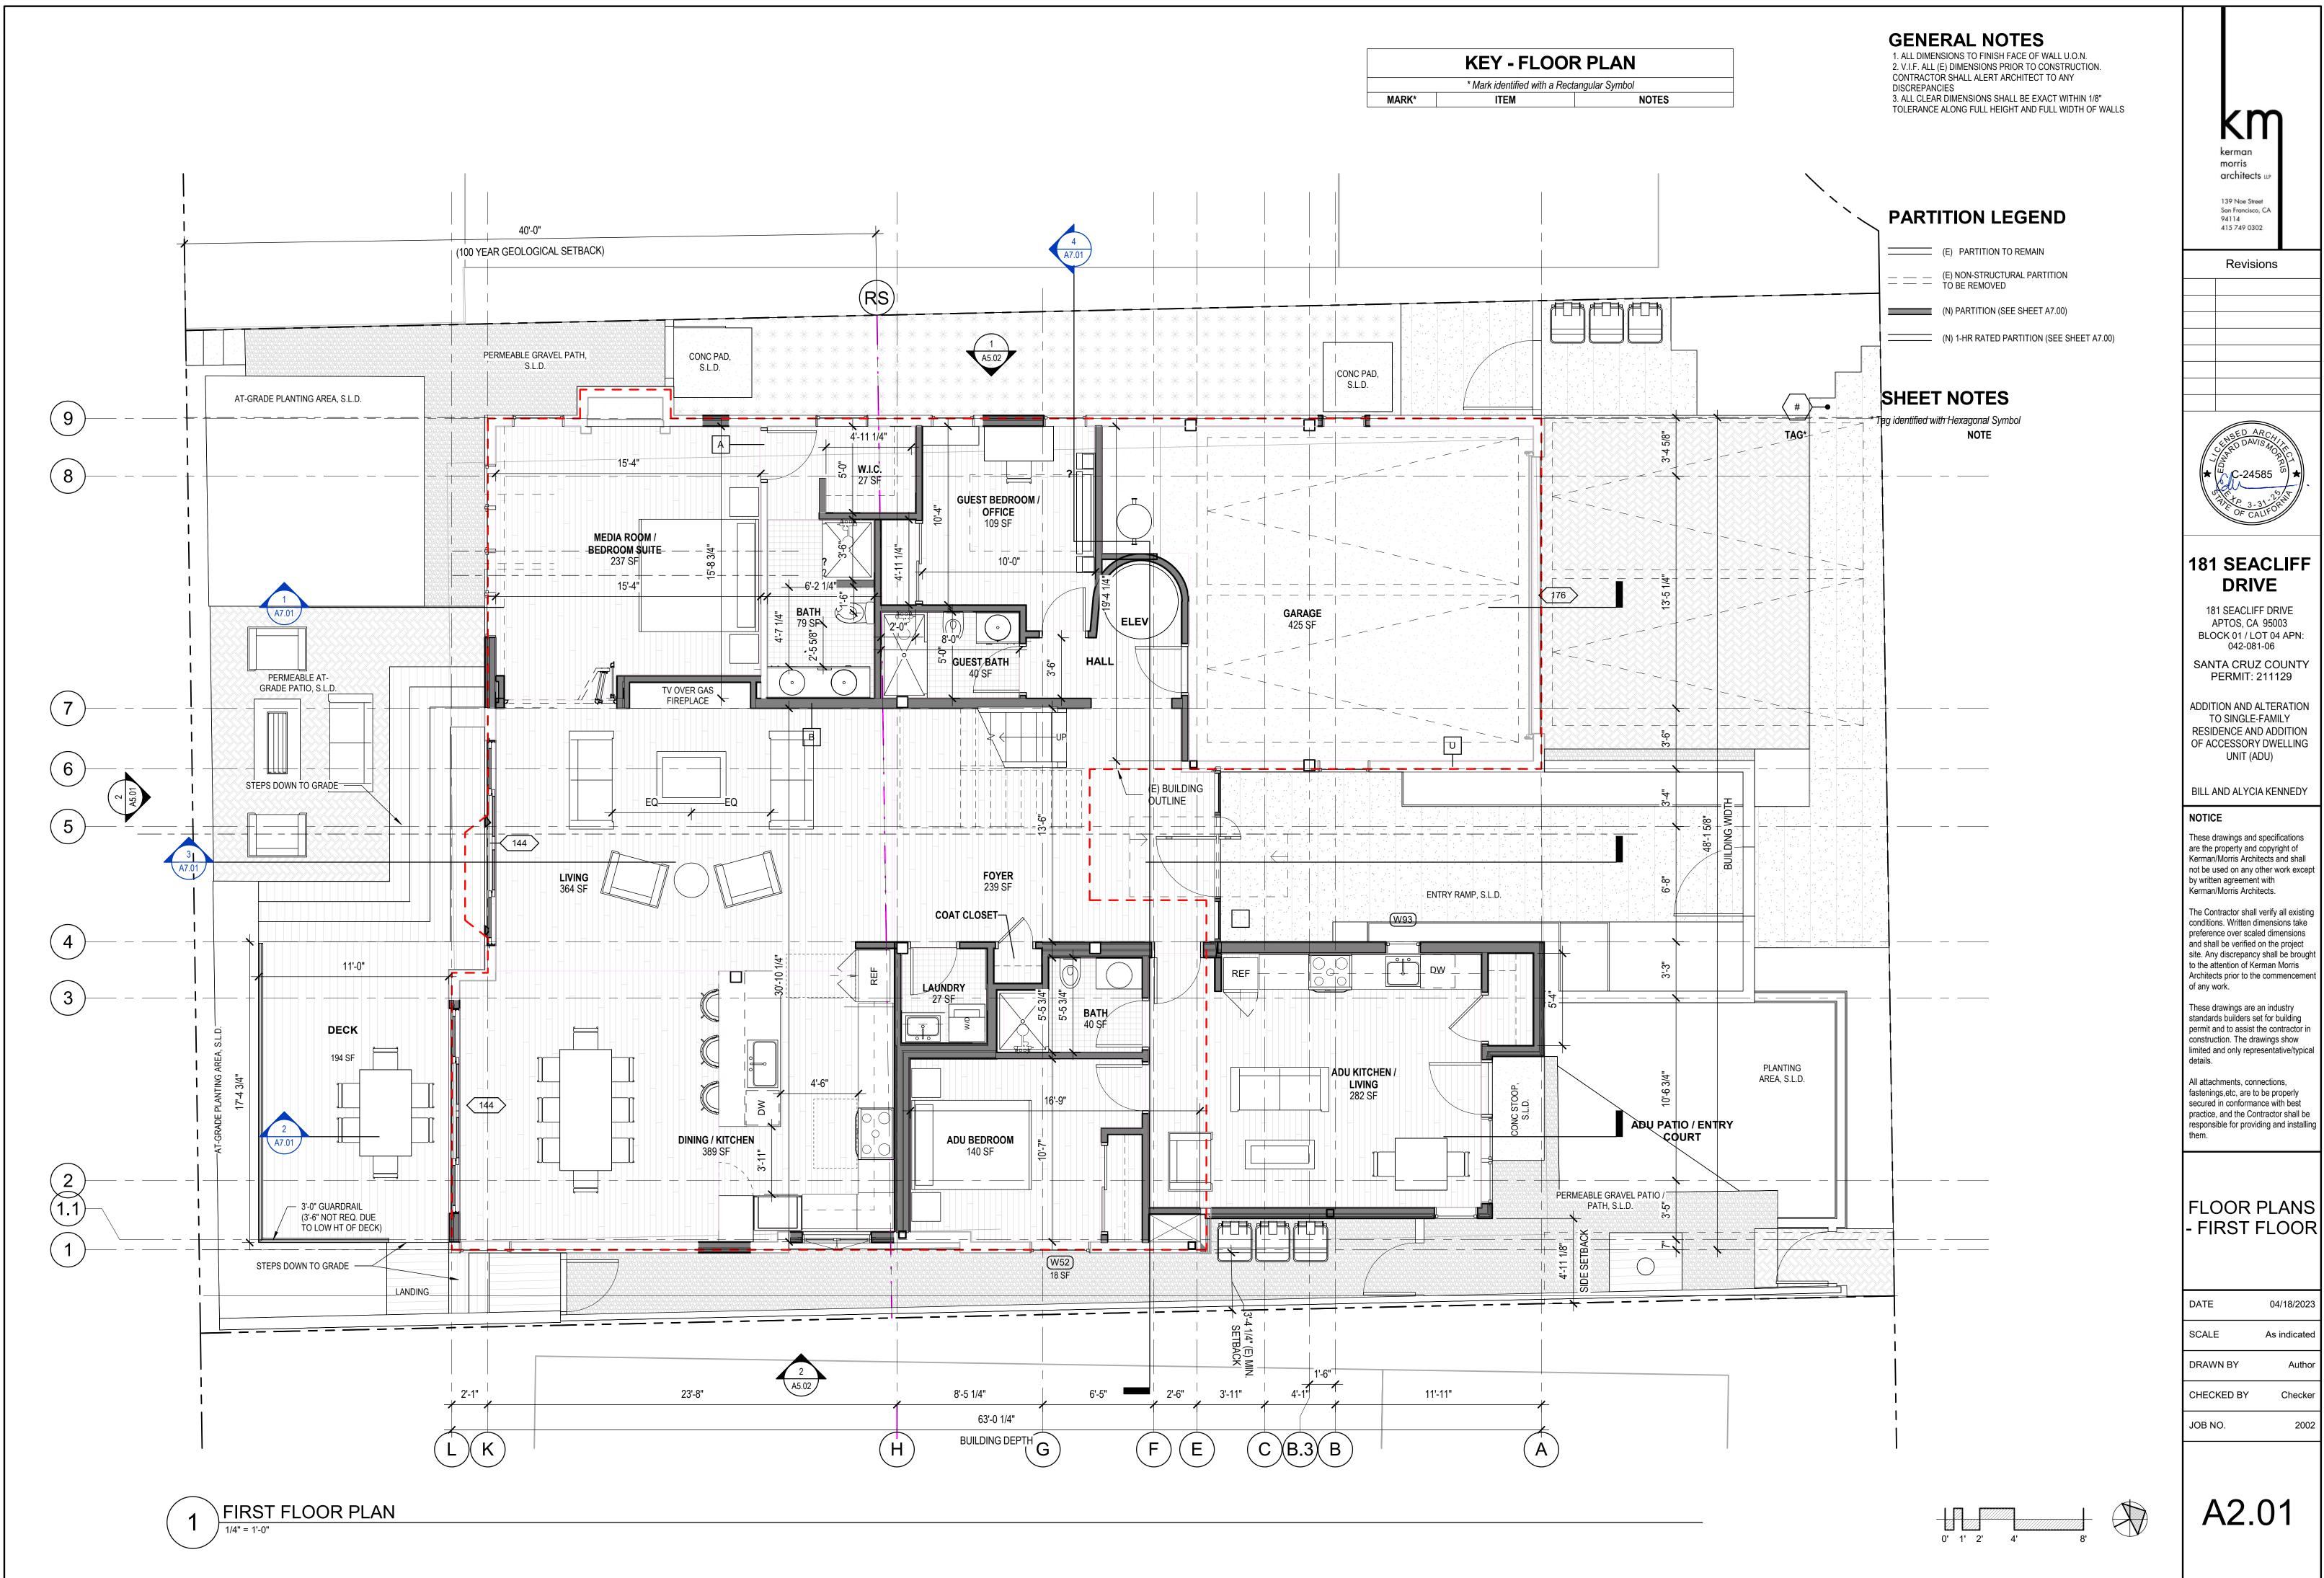

Autodesk Docs://181 Seacliff Drive/2002_181 Seacliff_R23.rvt


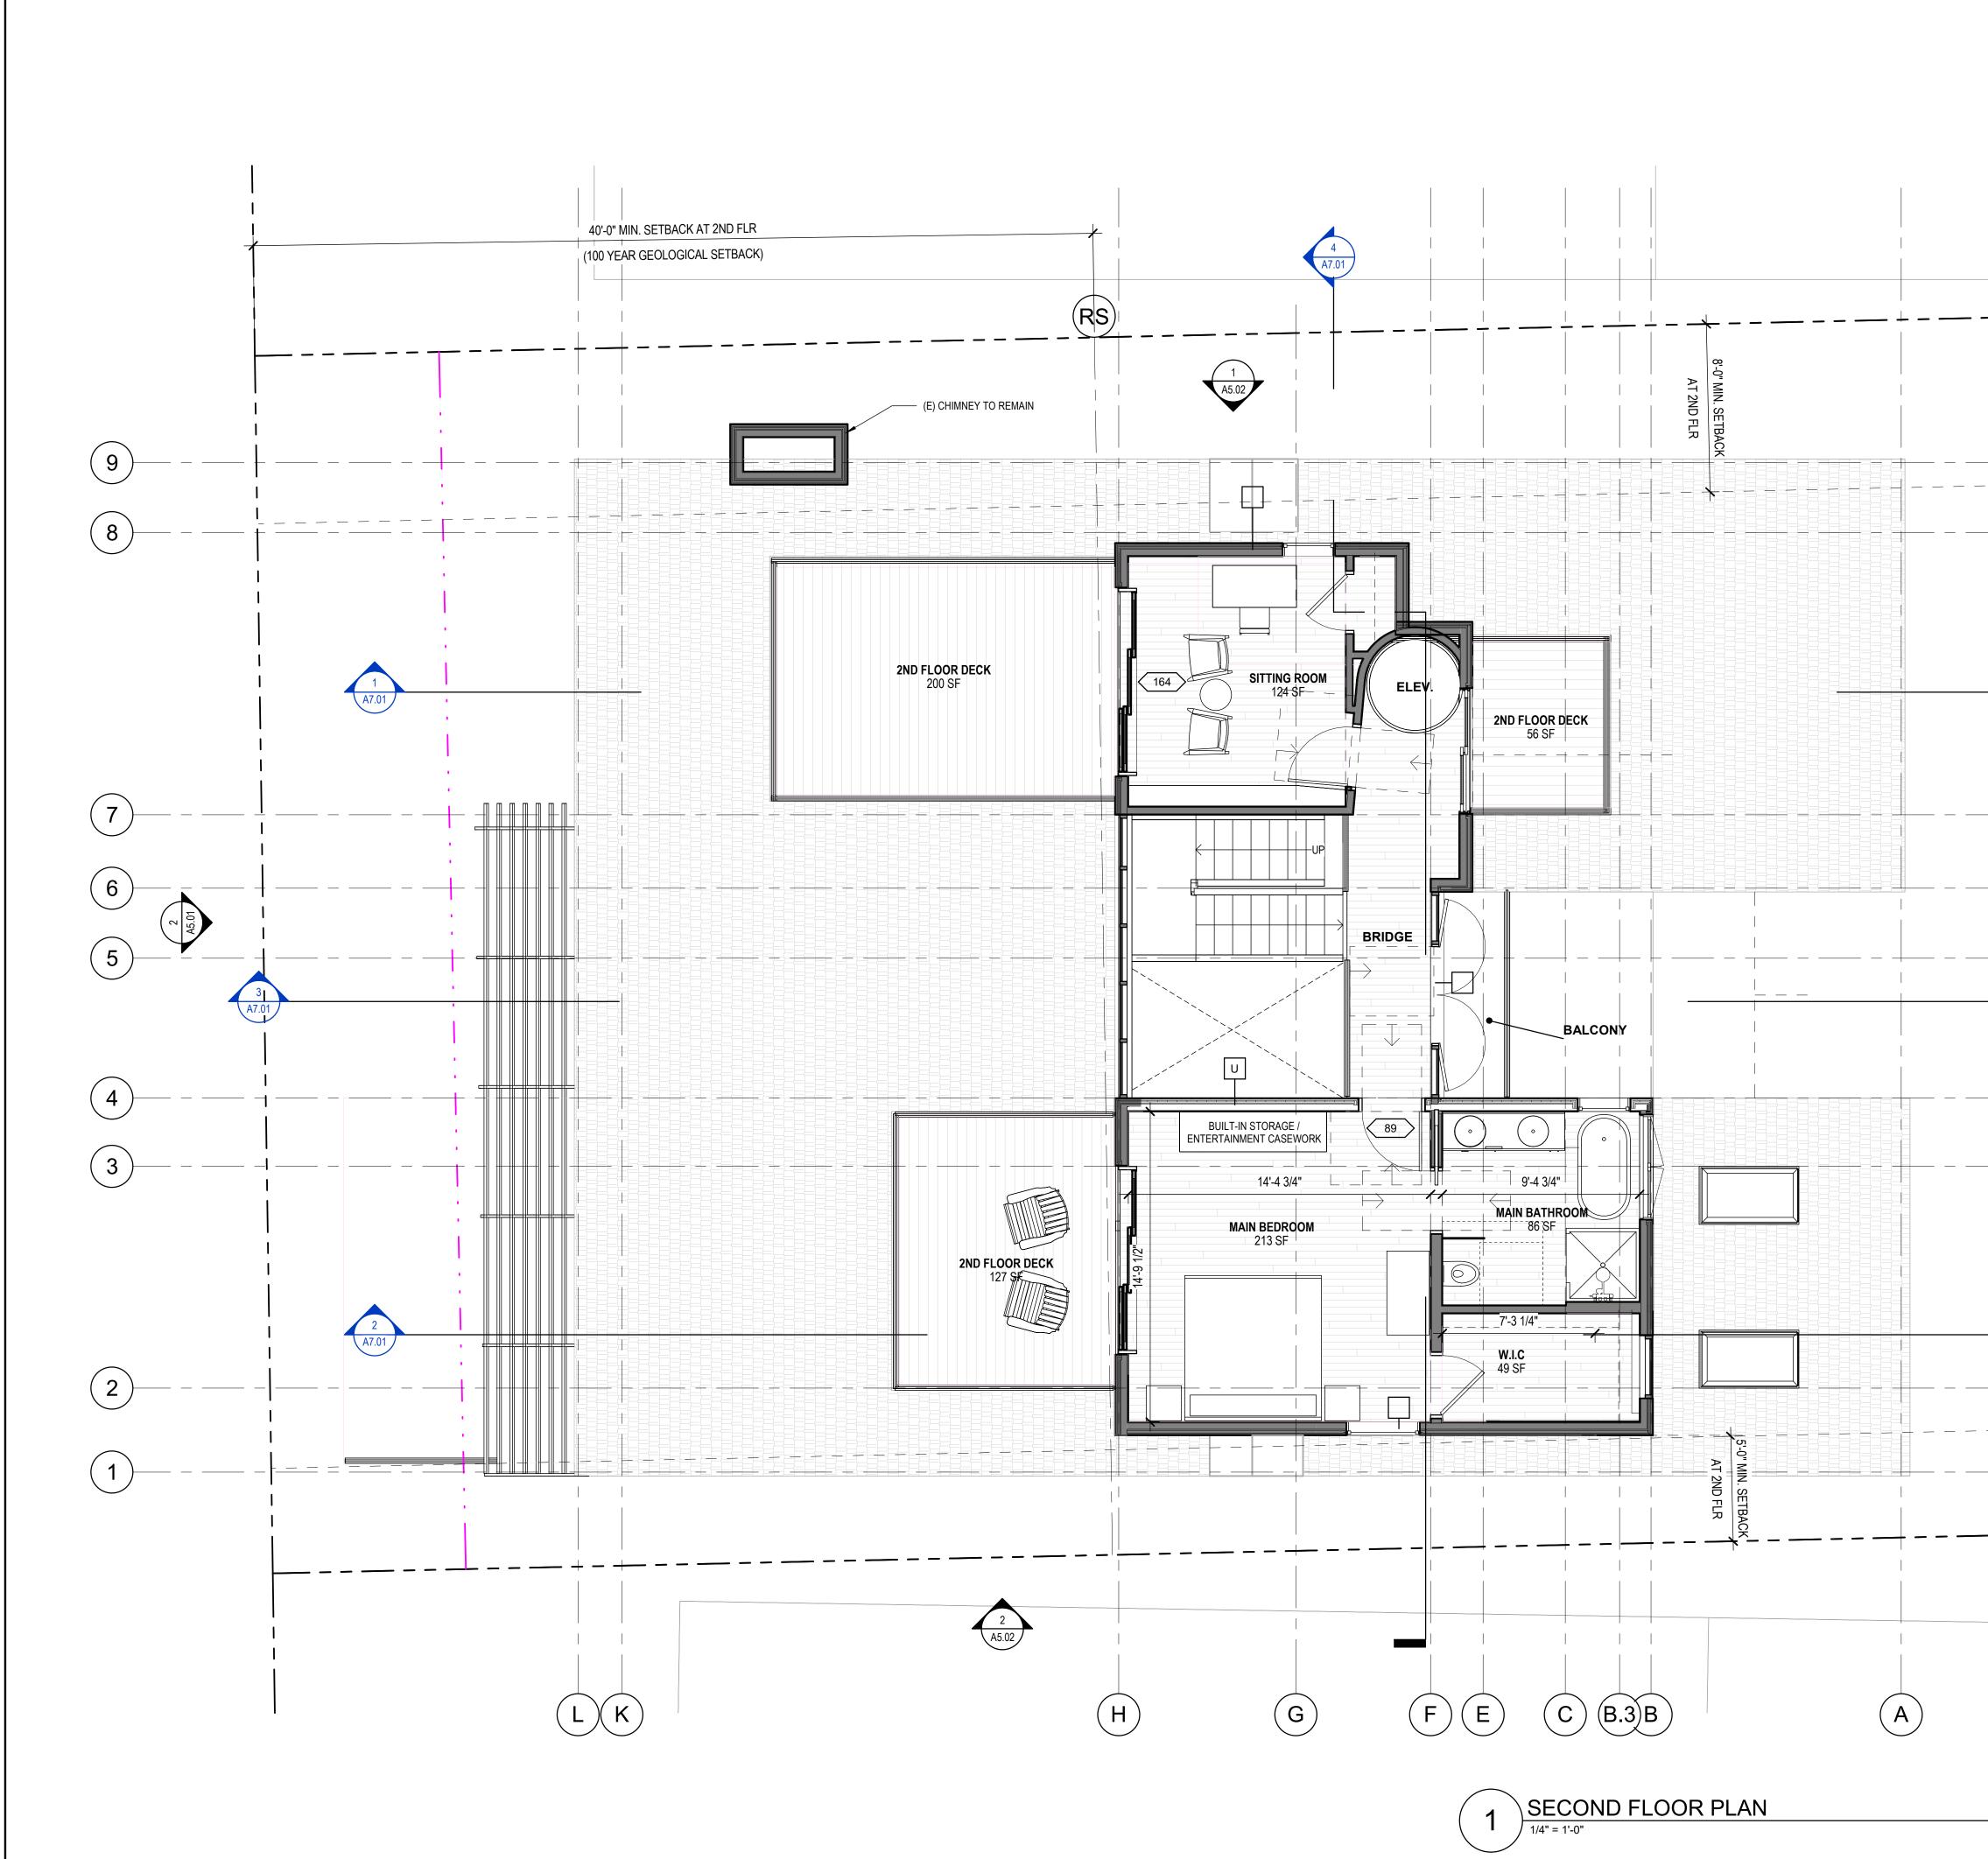


	Image: Serie of the serie
	A2.02




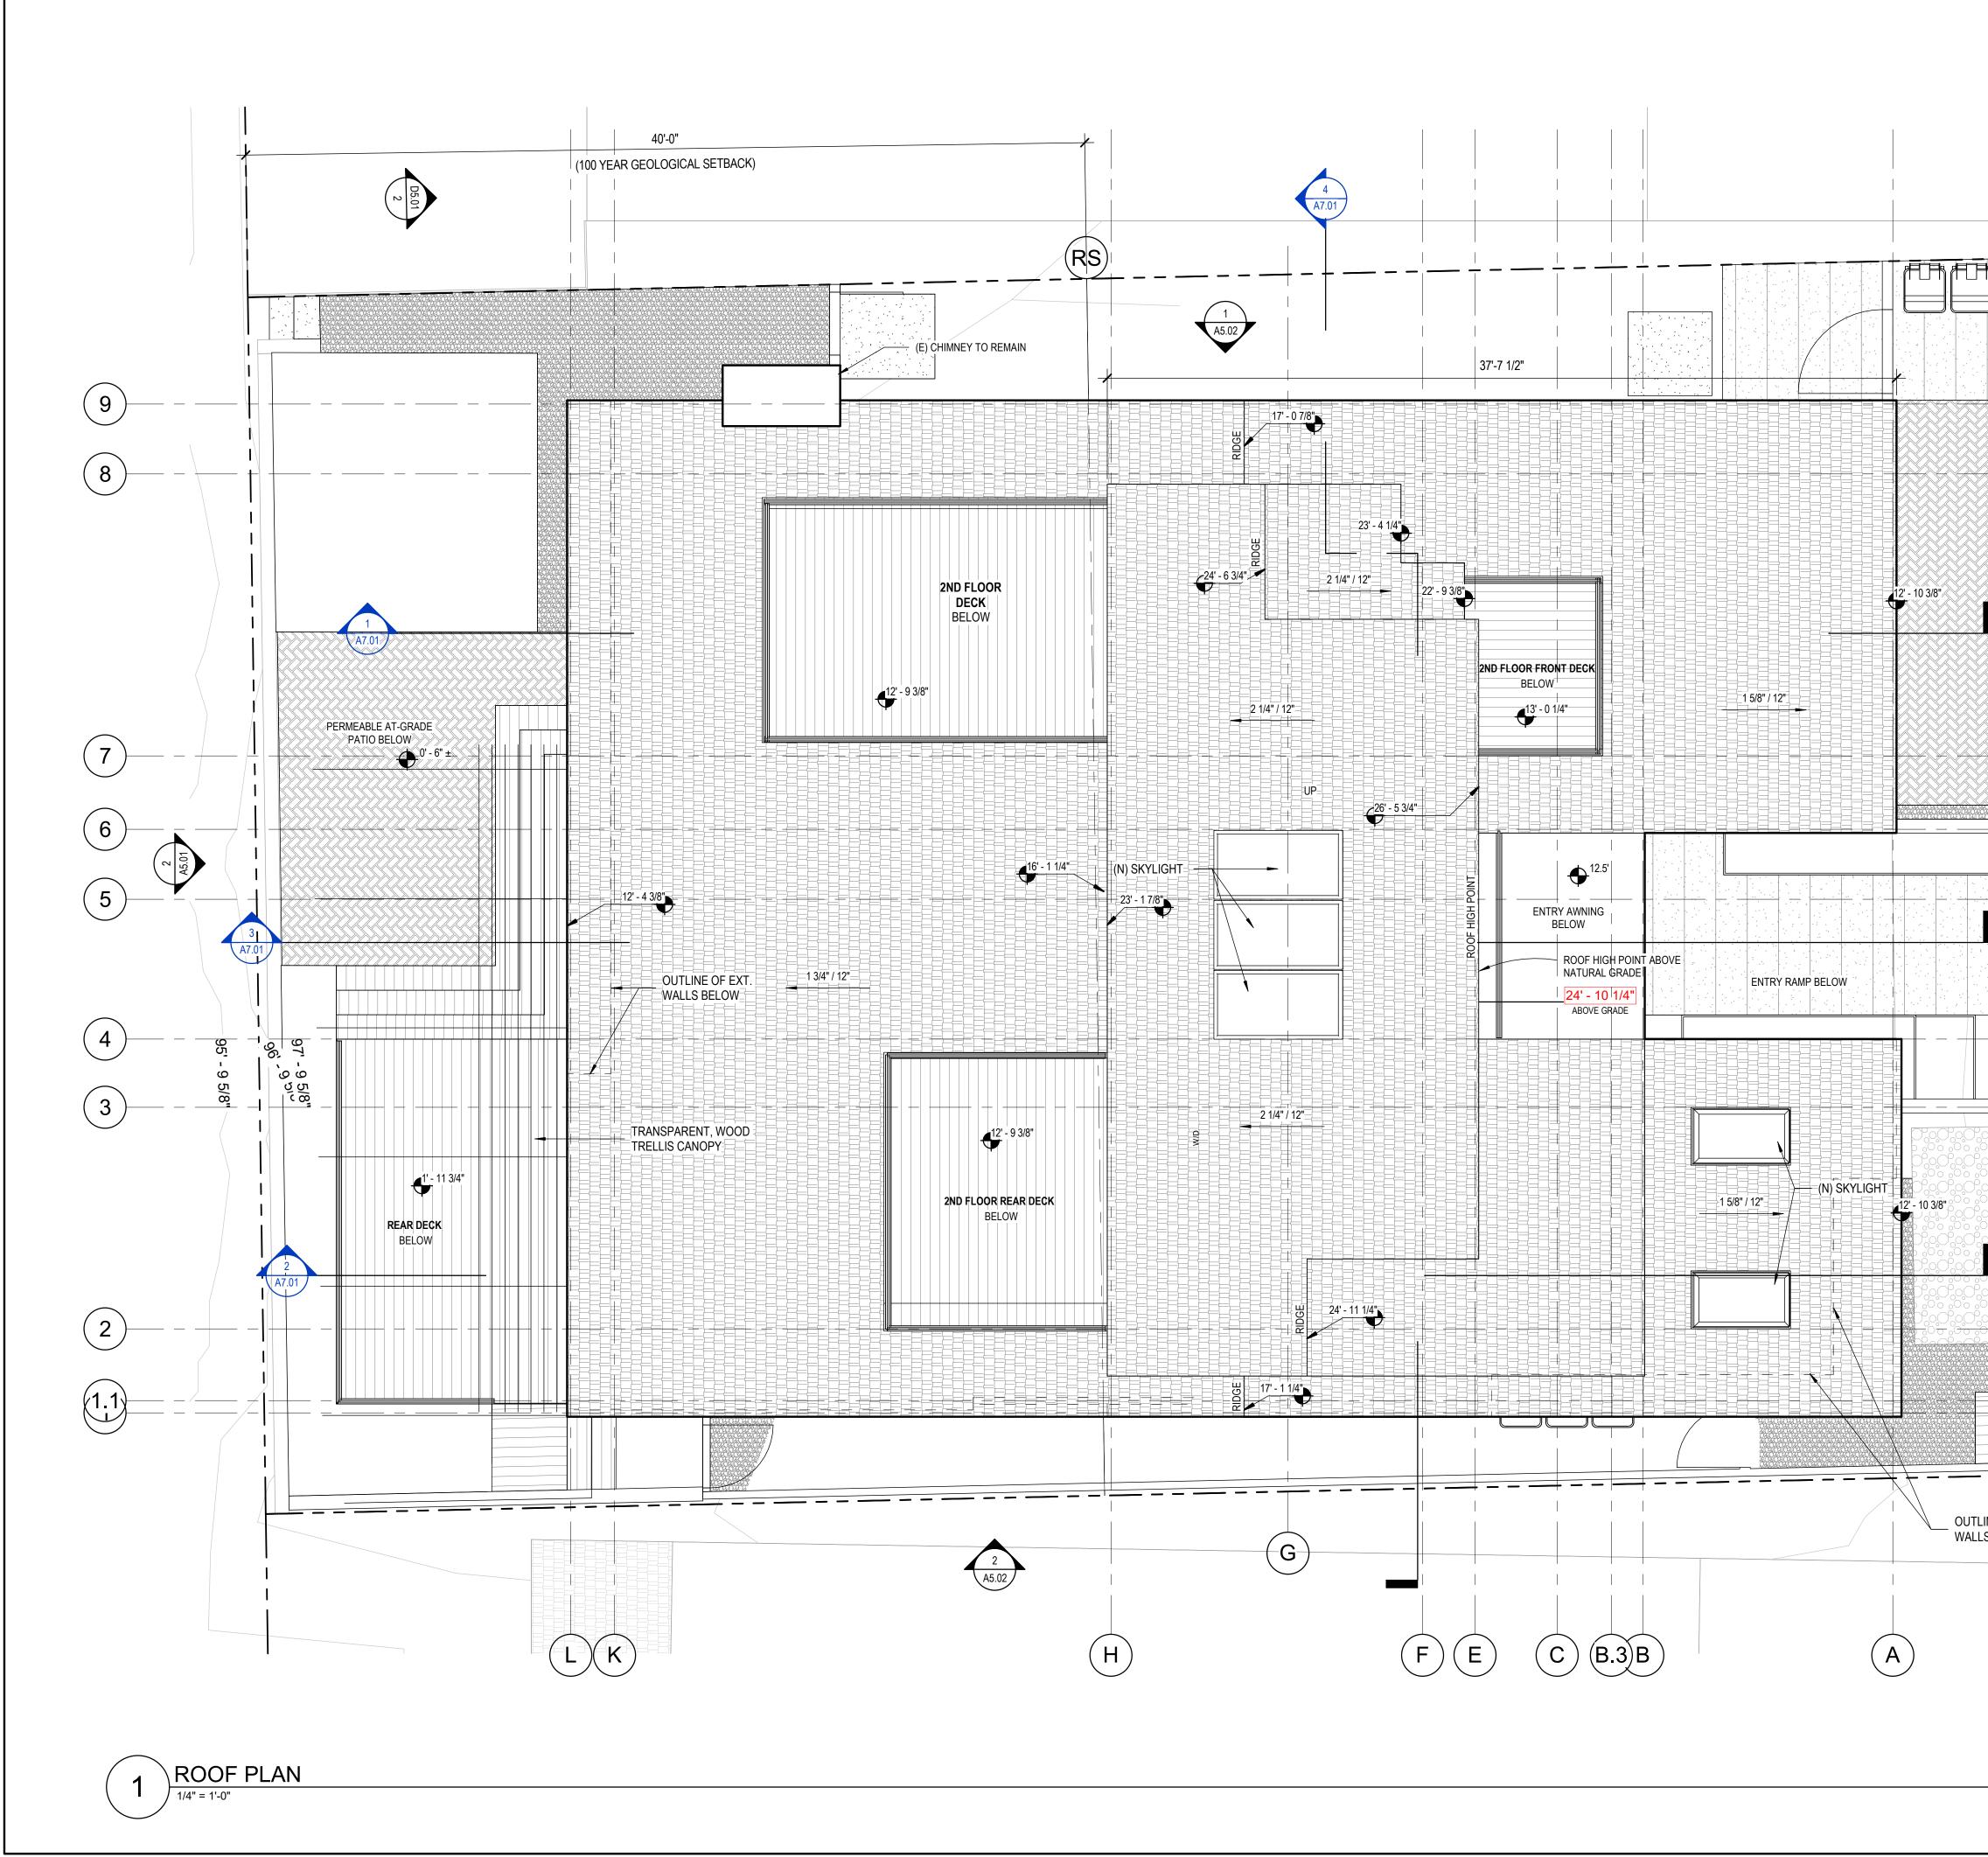



8/2023 2:54:10

-		km
	ELEVATION ABOVE <u>AVERAGE</u> NATURAL GRADE, SEE SECTIONS	kerman morris
		139 Noe Street San Francisco, CA 94114
		415 749 0302 Revisions
		CENSED ARCH
		C-24585 → → → → → → → → → →
		181 SEACLIFF DRIVE
PERMEABLE DRIVEWAY BELOW		181 SEACLIFF DRIVE APTOS, CA 95003 BLOCK 01 / LOT 04 APN:
30.23		042-081-06 SANTA CRUZ COUNTY PERMIT: 211129
		ADDITION AND ALTERATION TO SINGLE-FAMILY RESIDENCE AND ADDITION OF ACCESSORY DWELLING UNIT (ADU)
		BILL AND ALYCIA KENNEDY
		NOTICE These drawings and specifications are the property and copyright of Kerman/Morris Architects and shall not be used on any other work except by written agreement with Kerman/Morris Architects.
		The Contractor shall verify all existing conditions. Written dimensions take preference over scaled dimensions and shall be verified on the project site. Any discrepancy shall be brought to the attention of Kerman Morris Architects prior to the commencement of any work.
		These drawings are an industry standards builders set for building permit and to assist the contractor in construction. The drawings show limited and only representative/typical details.
		All attachments, connections, fastenings,etc, are to be properly secured in conformance with best practice, and the Contractor shall be responsible for providing and installing them.
		FLOOR PLAN - ROOF
INE OF EXT. .S BELOW		DATE 04/18/2023
		SCALE 1/4" = 1'-0"
		DRAWN BY Author CHECKED BY Checker
		JOB NO. 2002
	' 1' 2' 4' 8'	A2.03


Autodesk Docs://181 Seacliff Drive/2002_181 Seacliff_R23.rvt

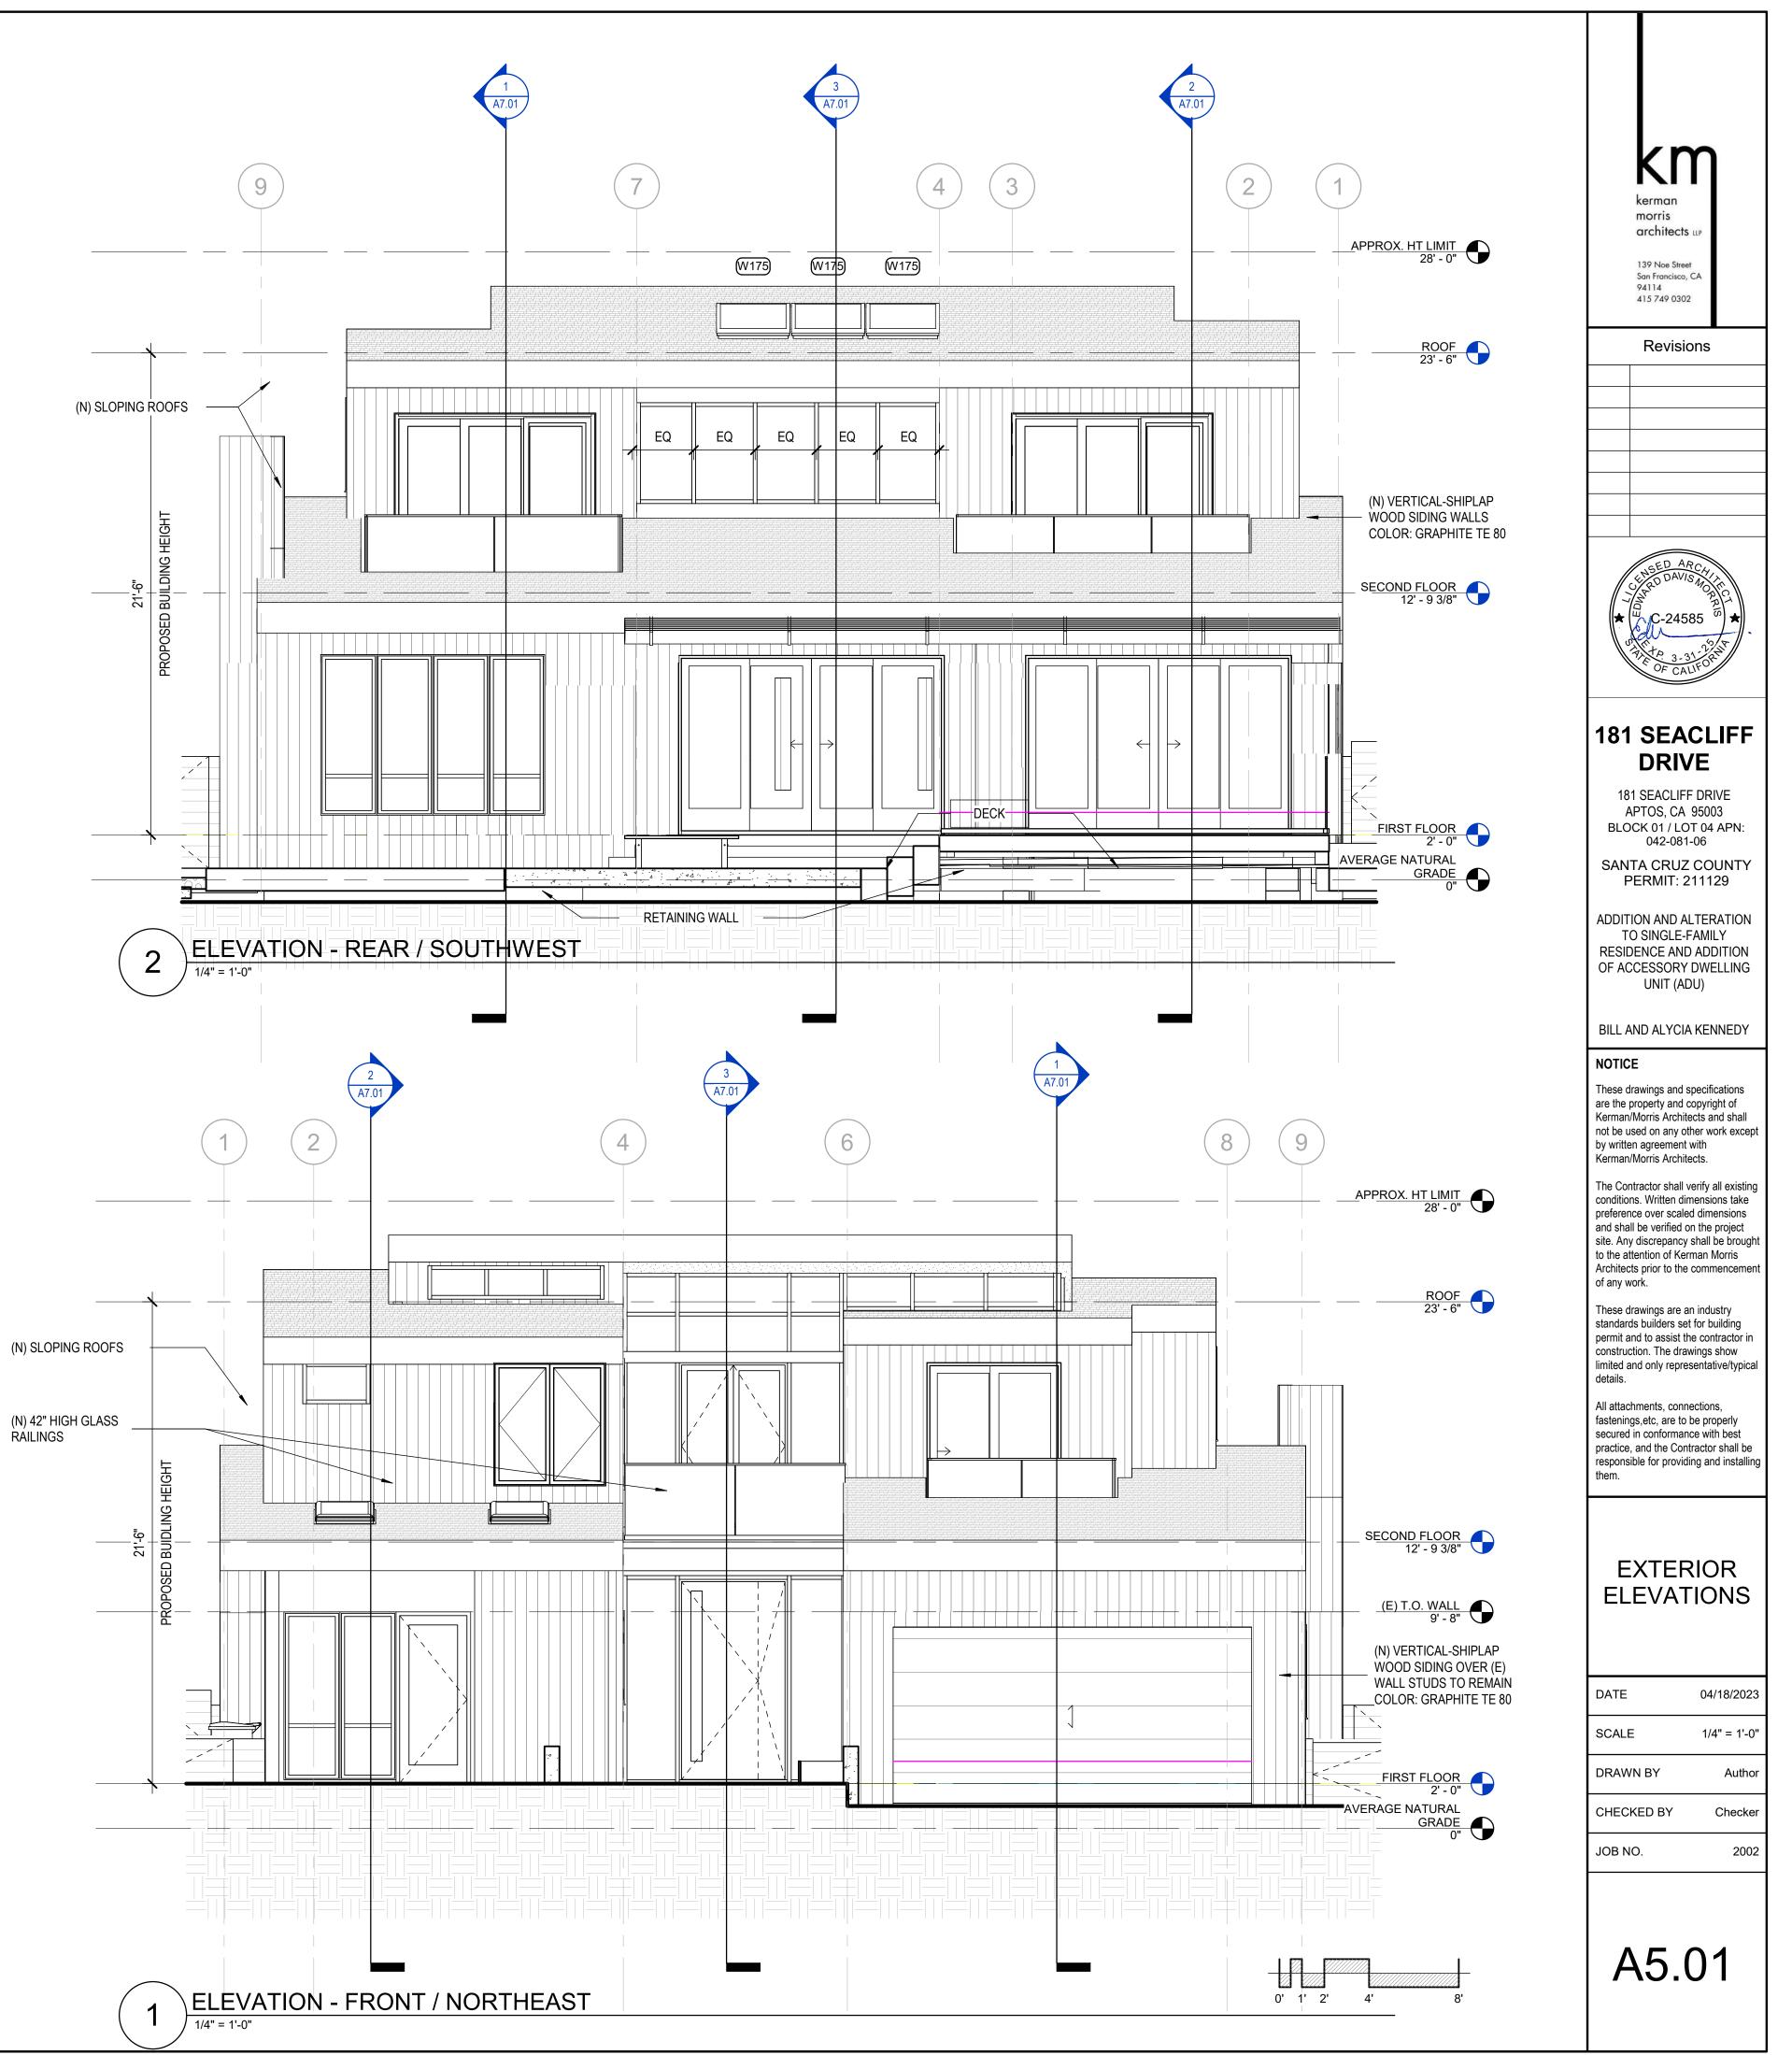

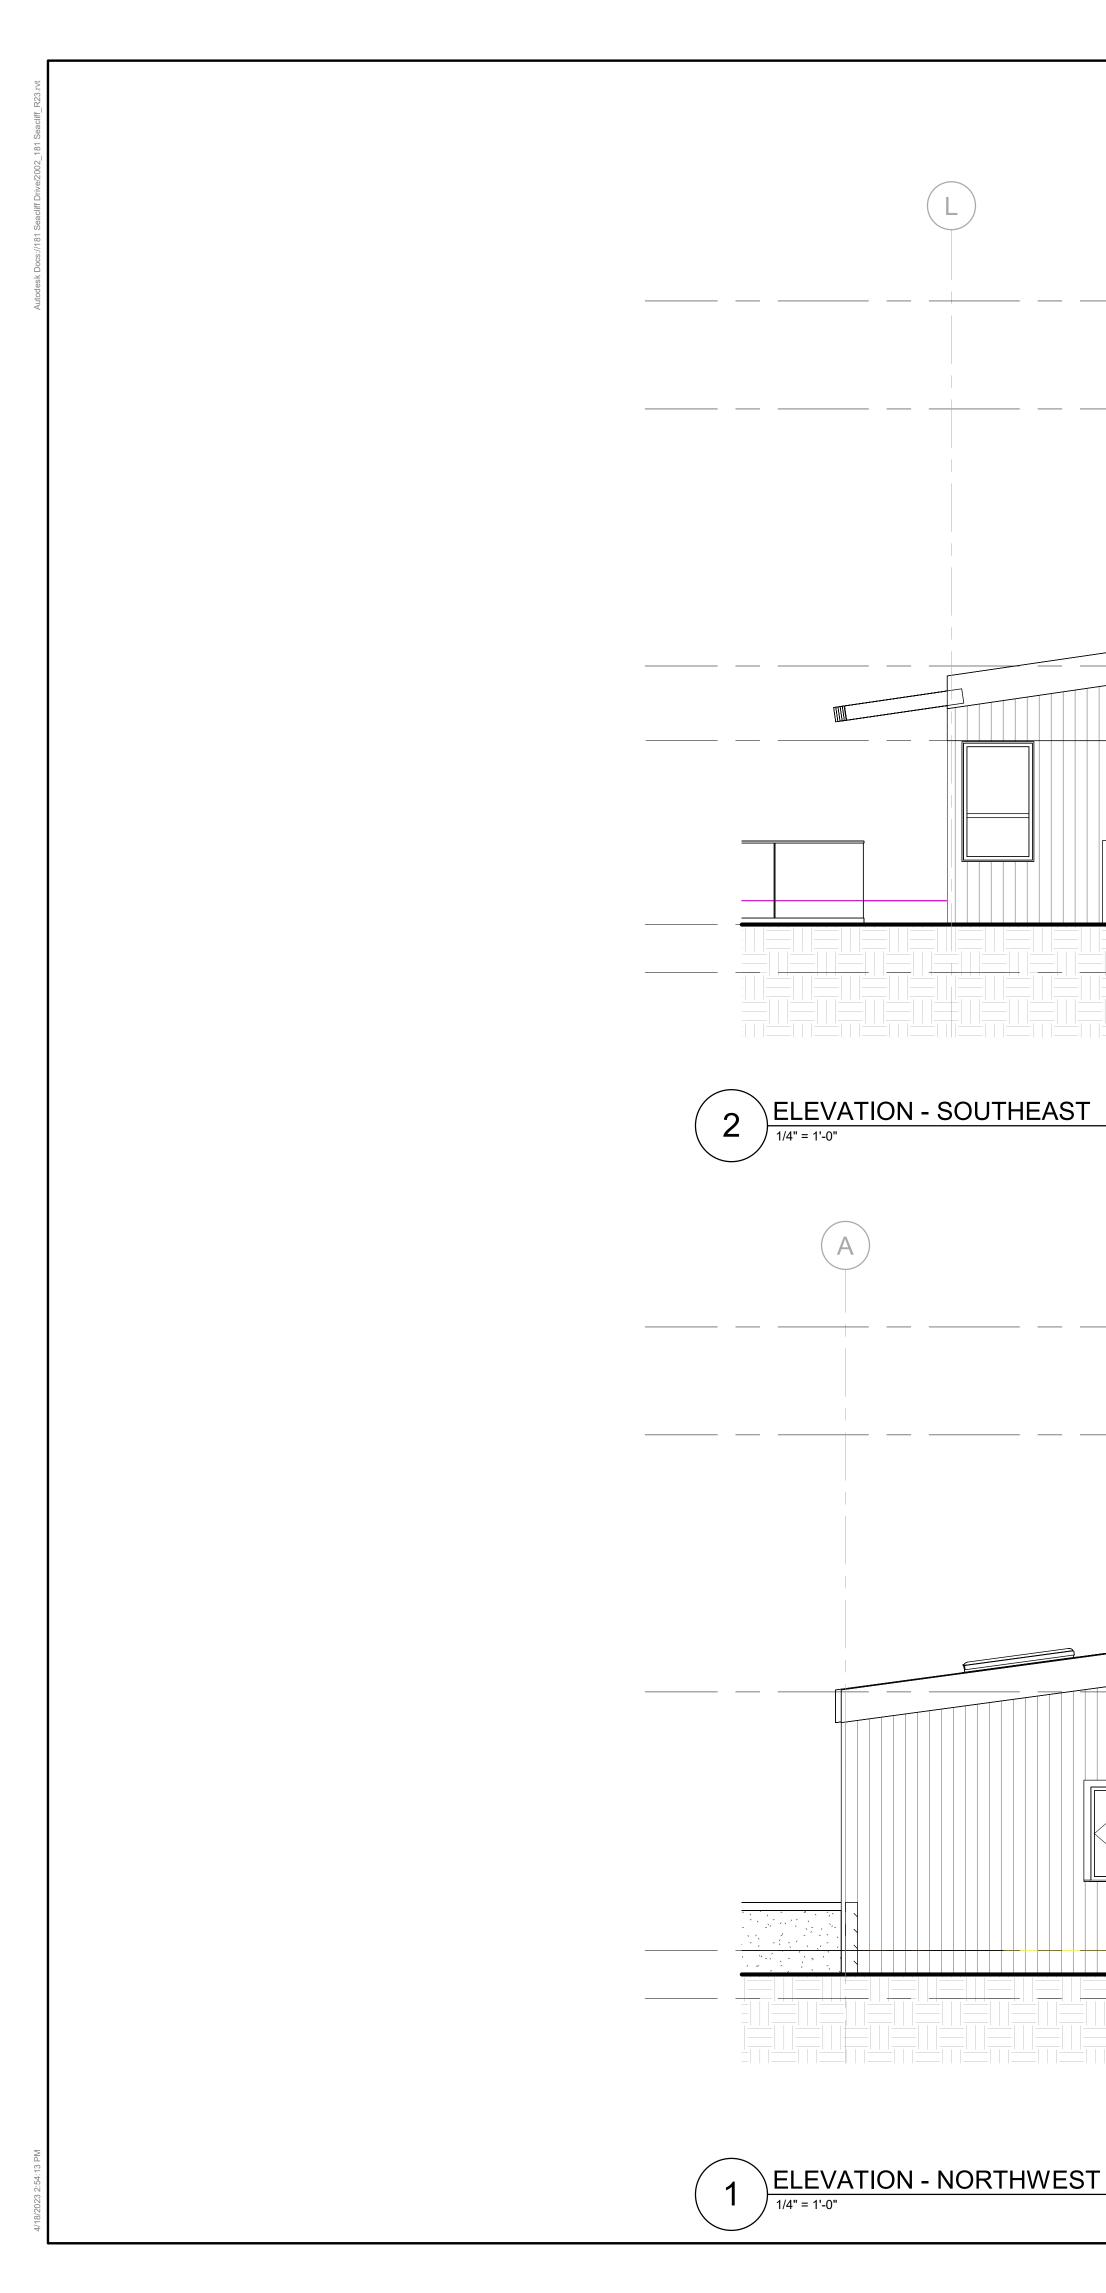

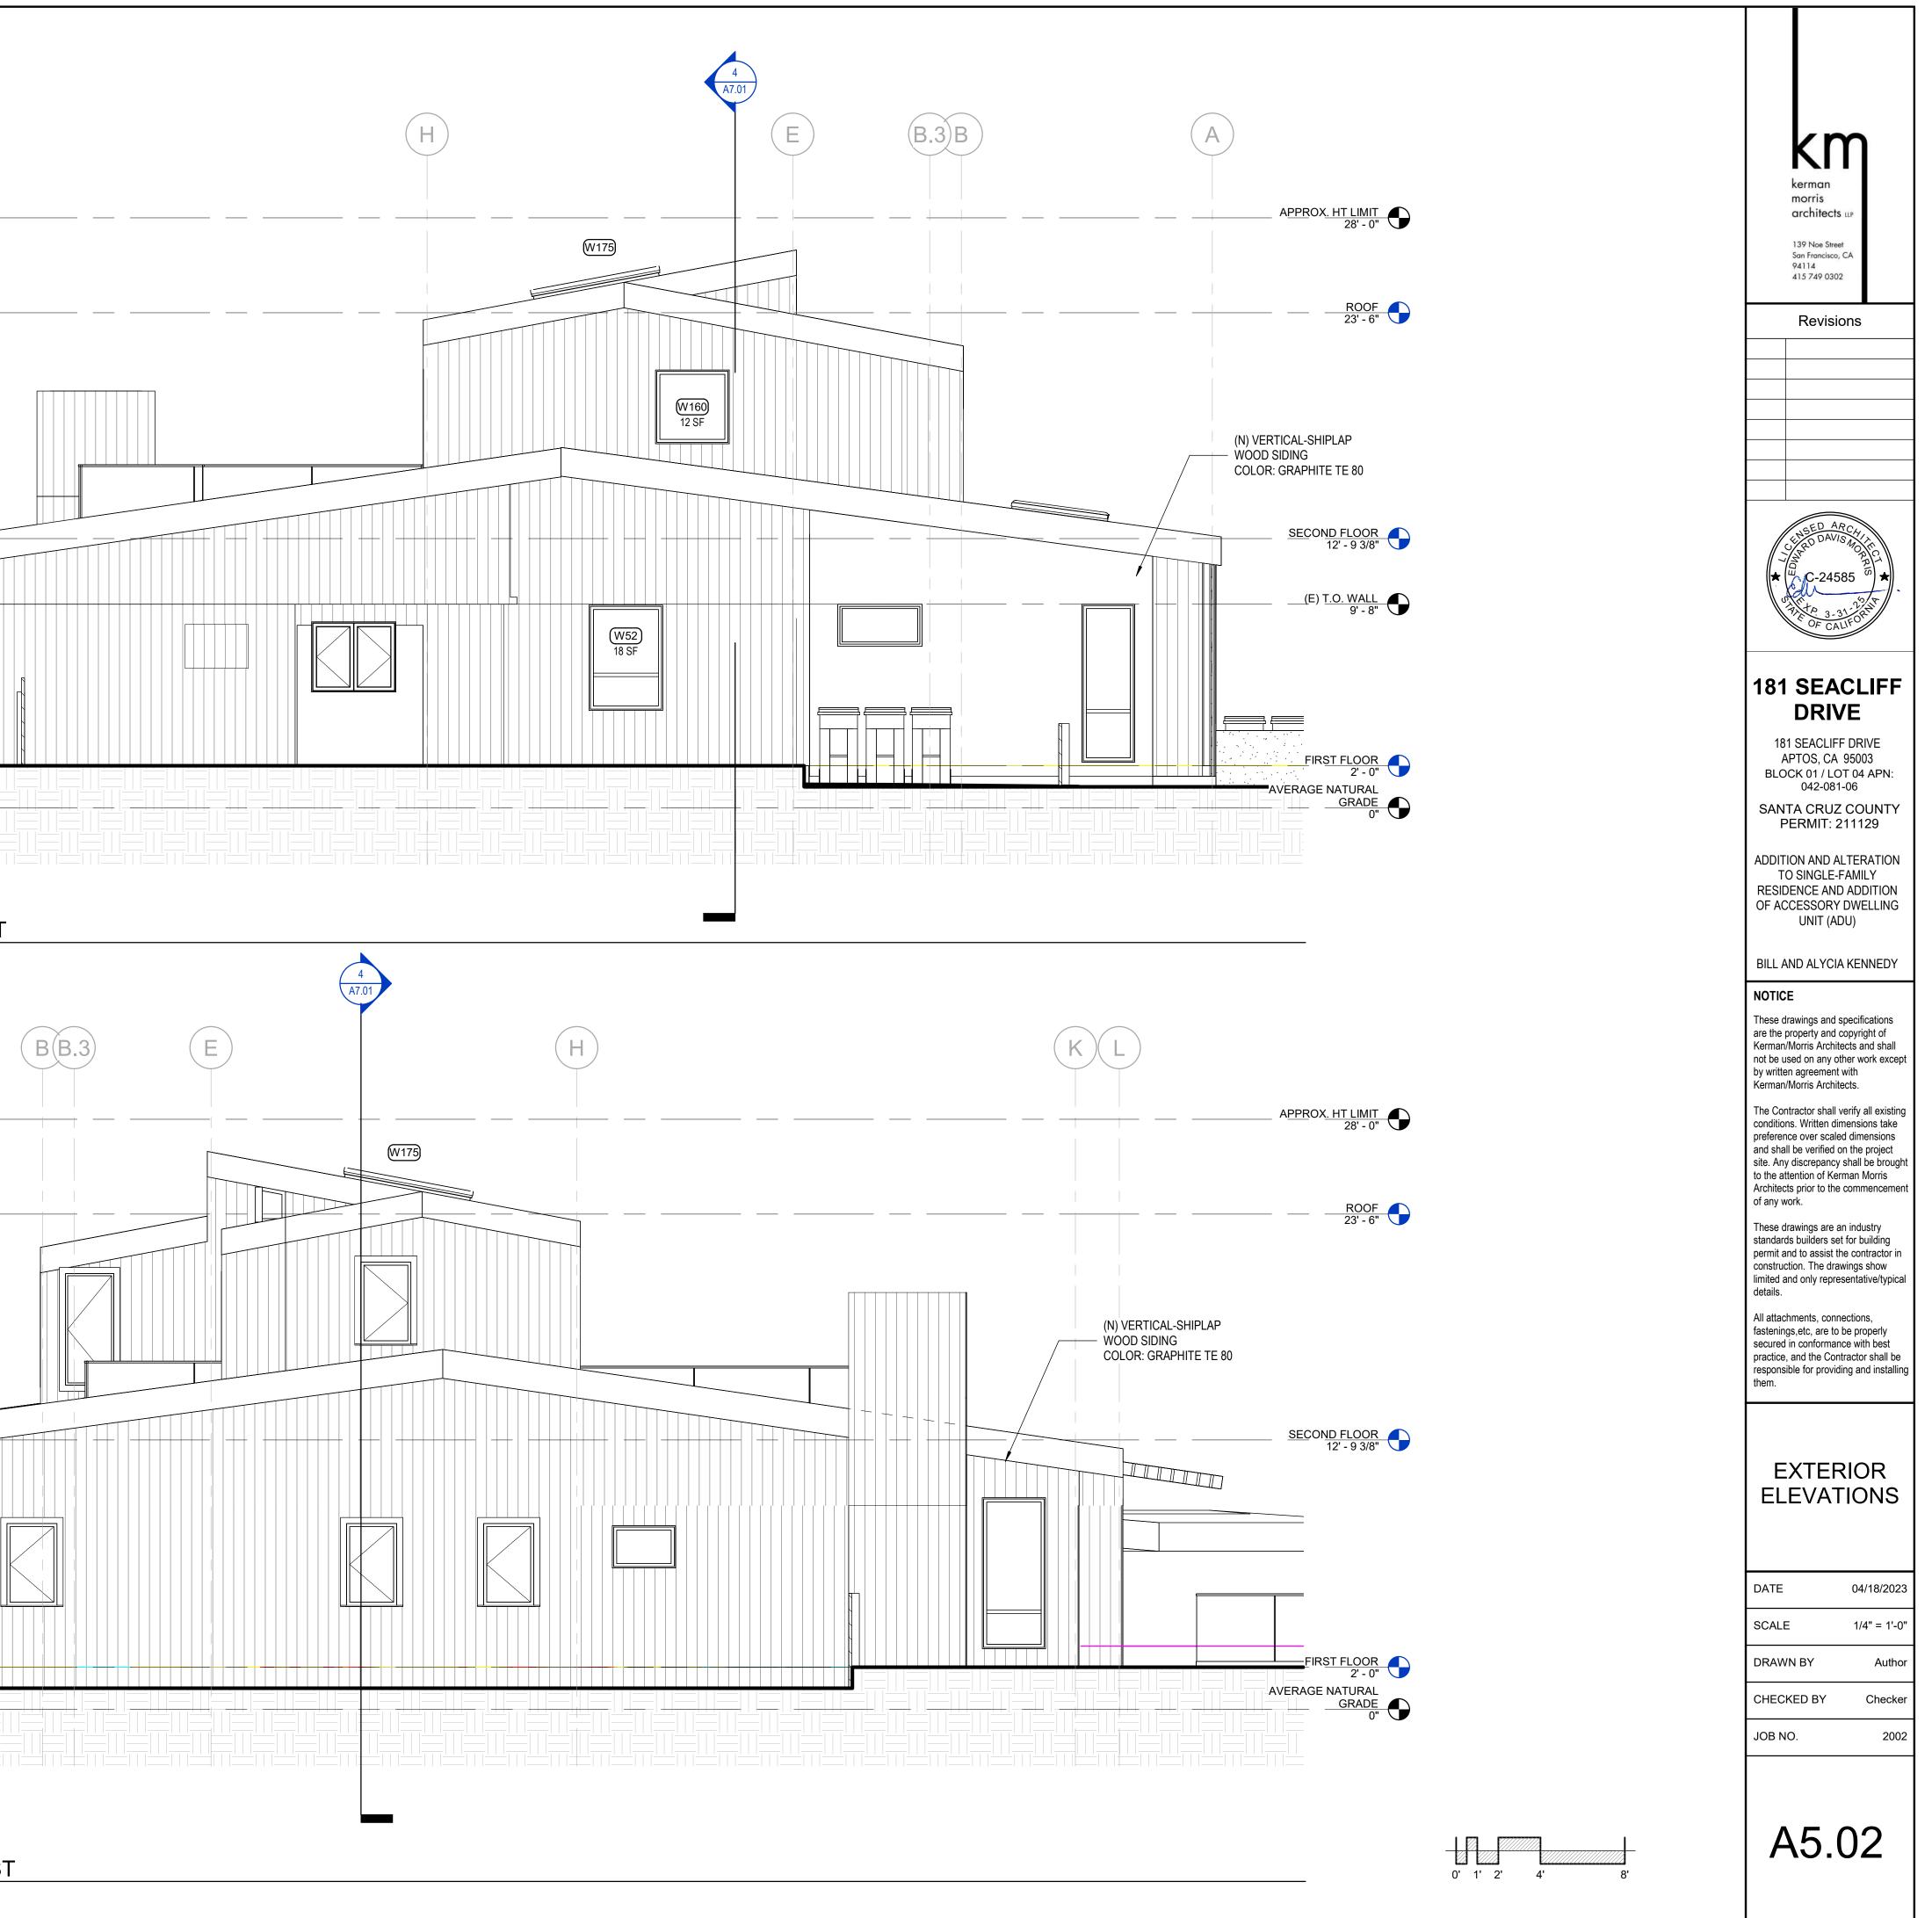



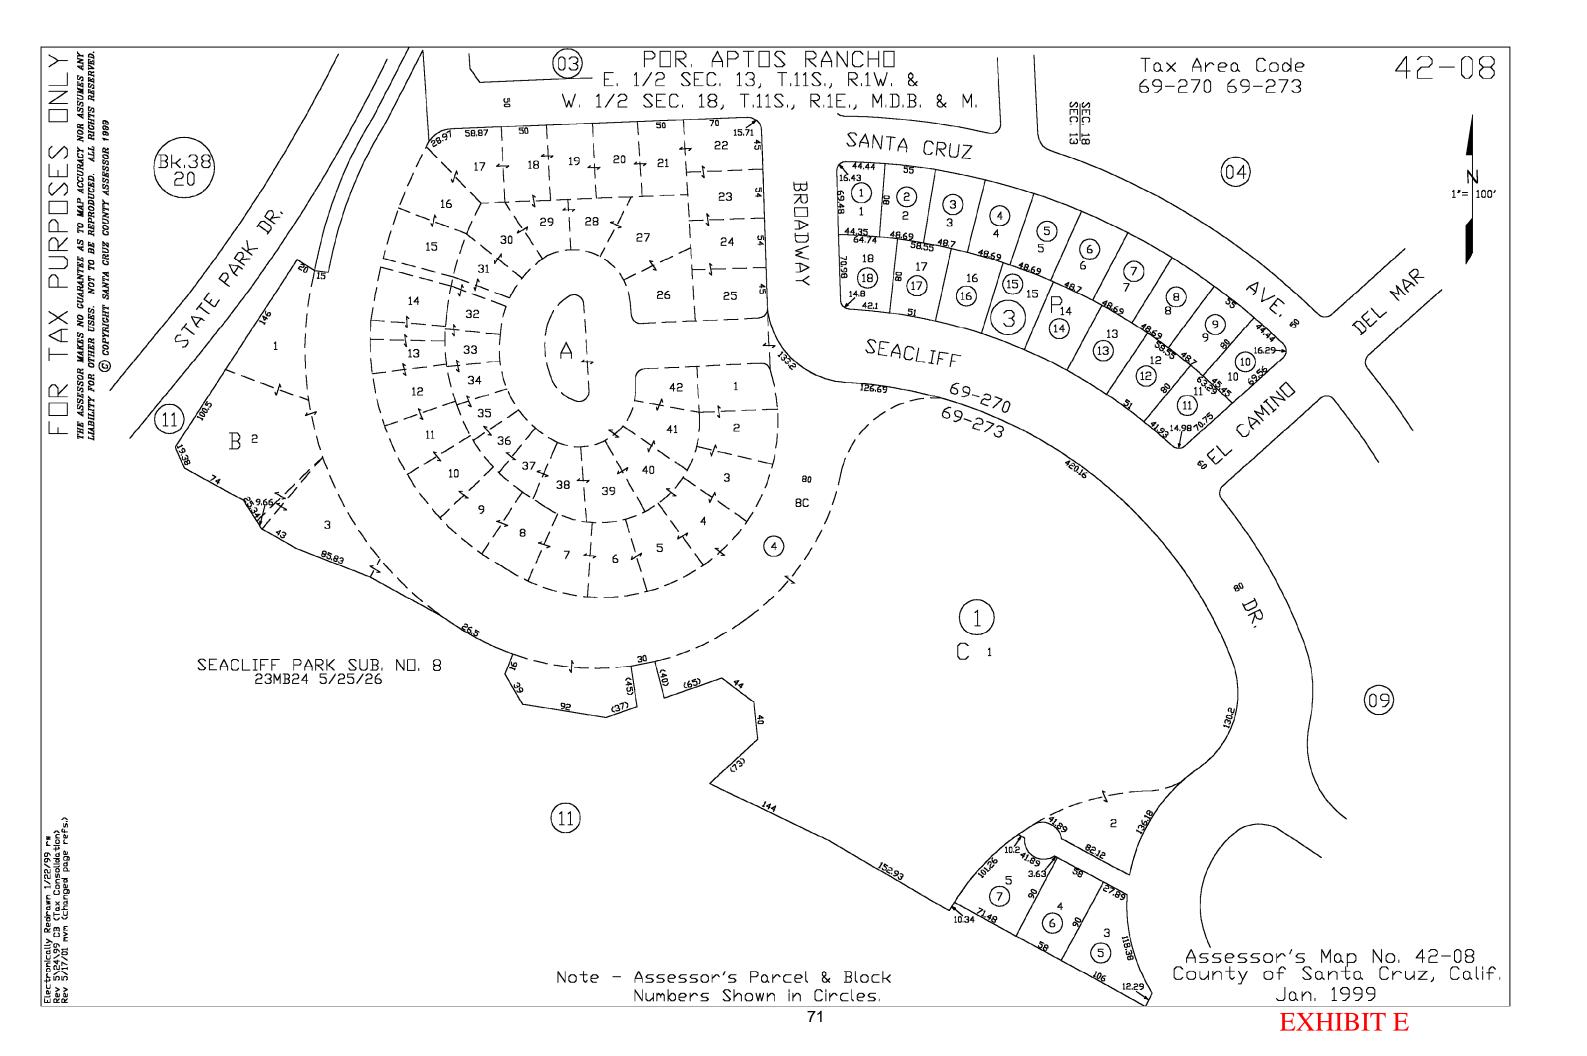




SANTA CRUZ COUNTY PLANNING DEPARTMENT Parcel Location Map

Mapped

Area

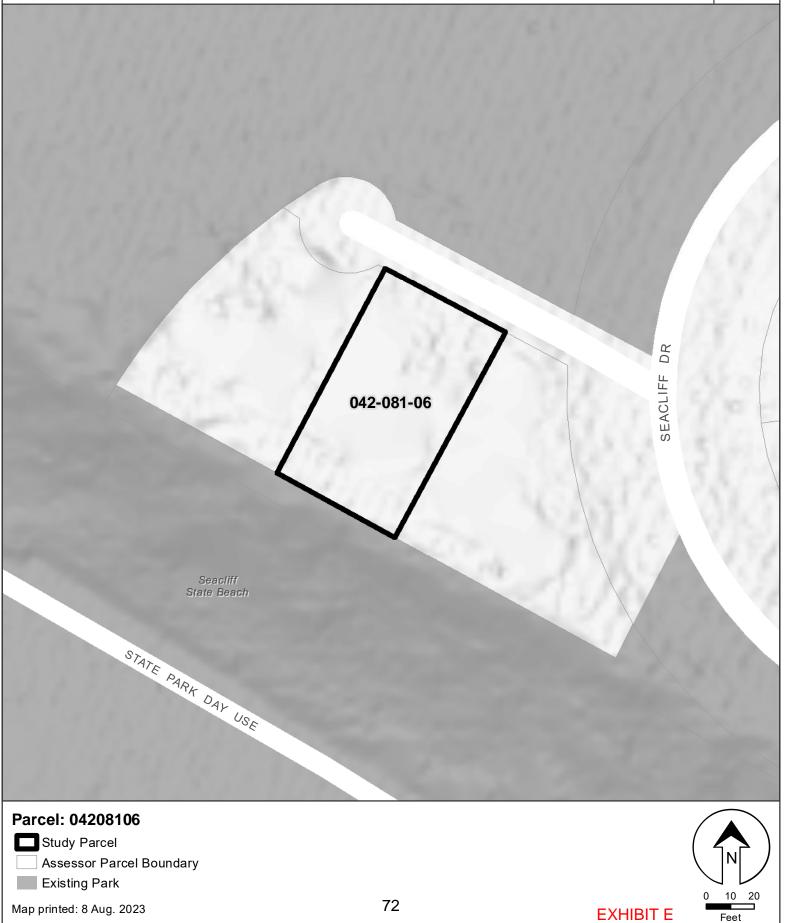



santa cruz county planning department Parcel General Plan Map

Mapped Area


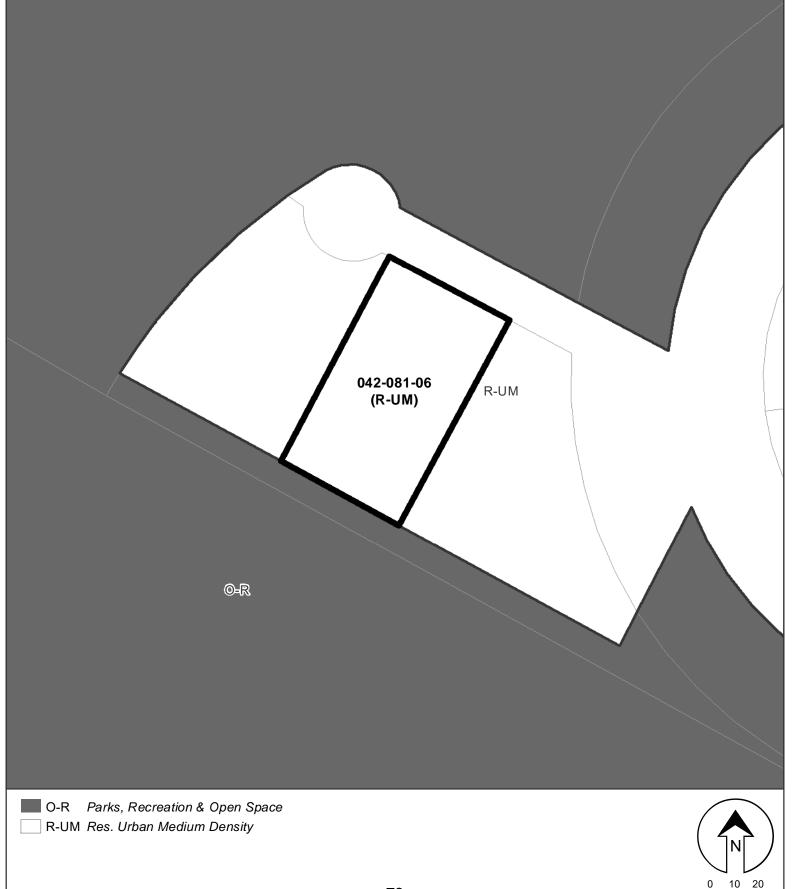


EXHIBIT E

Feet

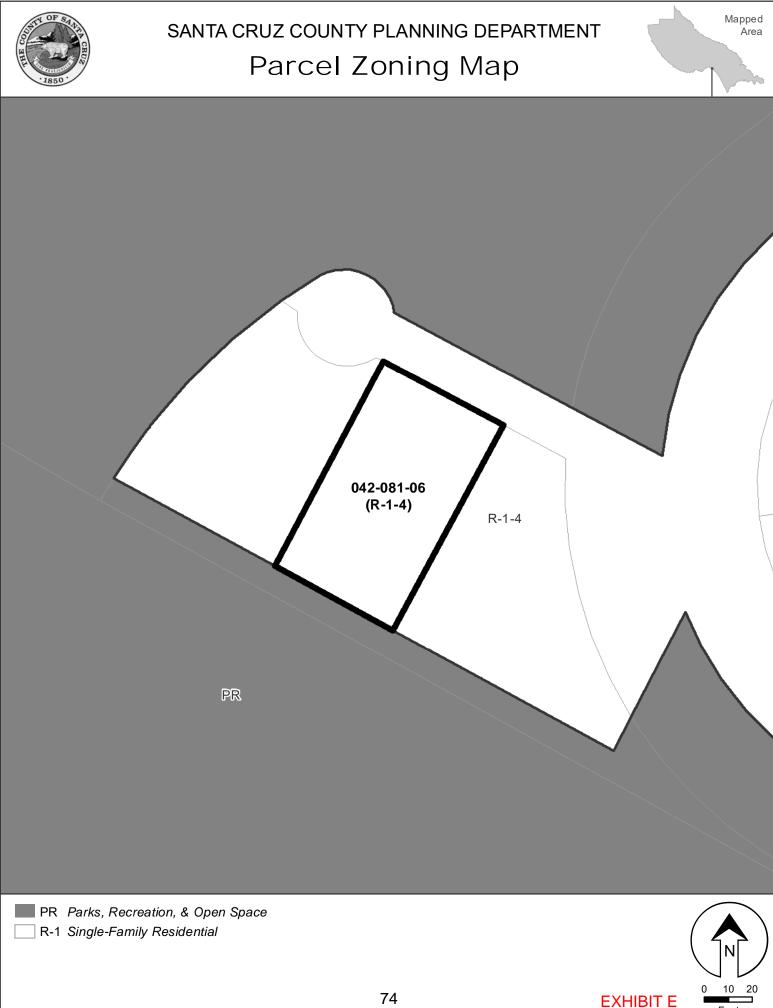

⁷⁴

Feet

Parcel Information

Services Information

Urban/Rural Services Line:	X Inside Outside
Water Supply:	Soquel Creek Water District
Sewage Disposal:	County of Santa Cruz Sanitation District
Fire District:	Central Fire Protection District
Drainage District:	Flood Control District 6

Parcel Information

Parcel Size: Existing Land Use - Parcel:	5,500 square feet Residential
Existing Land Use - Surrounding:	Residential and Parks, Recreation, Open Space
Project Access:	Seacliff Drive
Planning Area:	Aptos
Land Use Designation:	R-UM (Urban Medium Residential Desnity)
Zone District:	R-1-4 (Single Family Residential (4,000 square foot
	minimum parcel))
Coastal Zone:	X Inside Outside
Appealable to Calif. Coastal	<u>X</u> Yes No
Comm.	

Technical Reviews: Soils and Geology Report Review (REV191149)

Environmental Information

Geologic Hazards:	Coastal bluff/erosion
Fire Hazard:	Not a mapped constraint
Slopes:	Flat site
Env. Sen. Habitat:	Not mapped
Grading:	Foundation and driveway only
Tree Removal:	No trees proposed to be removed
Scenic:	Mapped scenic resource
Archeology:	Not mapped



COUNTY OF SANTA CRUZ

PLANNING DEPARTMENT 701 Ocean Street, 4th floor, Santa Cruz, Ca 95060 (831) 454-2580 Fax: (831) 454-2131 Tdd: (831) 454-2123 KATHLEEN MOLLOY, PLANNING DIRECTOR

13 July 2021

Dennis Norton 712 Capitola Ave. Ste. C Capitola, CA 95010

Subject: Review of <u>Geotechnical and Geologic Investigation</u>, <u>181 Seacliff Drive</u>, <u>Aptos</u>, <u>California</u> for Bill and Alycia Kennedy dated 8 April 2019 by CMAG Engineering, Inc.- Project No. 18-148-SC;

> Review of <u>Geotechnical Investigation</u>, <u>181 Seacliff Drive</u>, <u>Aptos</u>, <u>Santa Cruz</u> <u>County</u>, <u>California</u> dated 12 March 2020 by CMAG Engineering, Inc. Project No. 18-148-SC; and

> Review of Addendum to Geotechnical and Geologic Report, Proposed Remodel and Accessory Dwelling Unit, 181 Seacliff Drive, Aptos, Santa Cruz County, California, Santa Cruz County APN 042-081-06 dated 5 January 2021 by CMAG Engineering, Inc. - Project No. 18-148-SC

Project Site: 181 Seacliff Drive APN 042-081-06 Application No. REV191149 Owners: William and Alycia Kennedy

Dear Applicant:

The purpose of this letter is to inform you that the Planning Department has accepted the subject reports for the proposed alteration of the existing residence and the addition of an accessory dwelling unit. The following items shall be required:

- 1. All project design and construction shall comply with the recommendations of the reports.
- 2. Final plans shall reference the subject reports by titles, authors, and dates. Final Plans should also include a statement that the project shall conform to the reports' recommendations.
- 3. An engineered drainage plan is required for the proposed project. The drainage plan shall be reviewed and approved by both the project geologist and geotechnical engineer.
- 4. After plans are prepared that are acceptable to all reviewing agencies, please request both your project geologist and geotechnical engineer submit a completed <u>Consultant Plan</u> <u>Review Form</u> (PLG300) to Environmental Planning. The authors of the geology and geotechnical reports shall sign and stamp their completed forms. Please note that the plan review forms must reference the final plan set by last revision date.

REV191149 13 July 2021 APN 042-081-06 Page 2 of 3

Any updates to report recommendations necessary to address conflicts between the reports and plans must be provided via a separate addendum to the soils report and/or geology report.

Electronic copies of all forms required to be completed by the Geotechnical Engineer may be found on our website: <u>www.sccoplanning.com</u>, under "Environmental", "Geology & Soils", and "Assistance & Forms".

After building permit issuance the soils engineer and engineering geologist *must remain involved with the project* during construction. Please review the <u>Notice to Permits Holders</u> (attached).

Our acceptance of the reports is limited to their technical content. Other project issues such as zoning, fire safety, septic or sewer approval, etc. may require resolution by other agencies.

Please note that this determination may be appealed within 14 calendar days of the date of service. Additional information regarding the appeals process may be found online at: http://www.sccoplanning.com/html/devrev/plnappeal_bldg.htm

Please contact Rick Parks at (831) 454-3168/email: <u>Rick.Parks@santacruzcounty.us</u> or Jeff Nolan at (831) 454-3175/<u>Jeffrey.Nolan@santacruzcounty.us</u> if we can be of any further assistance.

Respectfully,



Rick Parks, GE 2603 Civil Engineer – Environmental Planning County of Santa Cruz Planning Department



Jeffrey Nolan, CEG 2247 County Geologist– Environmental Planning County of Santa Cruz Planning Department

Cc: CMAG Engineering, Inc., Attn: Jim Olson, CEG CMAG Engineering, Inc., Attn: Adrian Garner, GE Environmental Planning, Attn: Jessica deGrassi Owners: William and Alycia Kennedy 181 Seacliff Drive, Aptos, California 95003-4461

Attachments: Notice to Permit Holders

NOTICE TO PERMIT HOLDERS WHEN SOILS AND GEOLOGY REPORTS HAVE BEEN PREPARED, REVIEWED AND ACCEPTED FOR THE PROJECT

After issuance of the building permit, the County requires your soils engineer and engineering geologist to be involved during construction.

1. At the completion of construction, a *Soils (Geotechnical) Engineer Final Inspection Form* and a *Geologist Final Inspection Form* are required to be submitted to Environmental Planning that includes copies of all observations made during construction and is stamped and signed, certifying that the project was constructed in conformance with the recommendations of the soils and geology reports.

If the *Final Inspection Form* identifies any portions of the project that were not observed by the soils engineer and/or geologist, you may be required to perform destructive testing in order for your permit to obtain a final inspection. The soils engineer and/or geologist then must complete and initial an *Exceptions Addendum Form* that certifies that the features not observed will not pose a life safety risk to occupants.

Late Comments & Correspondence

Application Number 211129

EXHIBIT H

EXHIBIT H

August 31, 2023

VIA EMAIL

Zoning Administrator c/o Nathan MacBeth Santa Cruz County Planning Department 701 Ocean Street, 4th Floor Santa Cruz, CA 95060 nathan.macbeth@santacruzcounty.us

> Re: Coastal Development Permit (Application #211129) 181 Seacliff Drive, Aptos Zoning Administrator Agenda for September 1, 2023; Agenda Item #2

Dear Zoning Administrator:

This law firm has been retained by Protect Seacliff, a group of residents opposed to the above referenced project and we submit this letter opposing this project on behalf of our client. The project does not comply with the Local Coastal Program (LCP) and the California Environmental Quality Act (CEQA), and notice of the hearing was defective. Therefore, the project should be denied.

A. The Staff Report Erroneously Concludes that the Project Complies with the LCP Because the Project Impacts View from Seacliff Beach

The Staff Report concludes that the proposed project is in conformance with the Local Coastal Program and compatible with the existing single family homes surrounding the project site. However, it would be the only two-story, single-family home on the bluff top. The two immediately adjacent homes and the other three blufftop homes on the other side of the public parking/viewing area along the ocean side of Seacliff Drive are all single-story.

The Project is inconsistent with the LCP's visual resource protections. The proposed project would substantially increase the visibility of the home from the beach, which raises LCP consistency issues including with respect to LUP Policies 5.10.2 "Development within Visual Resource Areas", 5.10.4 "Preserving Natural Buffers", and 5.10.7 "Open Beaches and Blufftops." LUP Policy 5.10.2 acknowledges the importance of visual resources and requires that projects be evaluated against their unique environment (i.e., the surrounding projects and natural context), and LUP Policy 5.10.7 prohibits the placement of new permanent structures that would be visible from the public beach except where allowed on existing parcels of record and "where compatible with the pattern of existing development." These visual resource provisions are further codified in the requisite coastal permit findings (see, County Code section 13.20.110(E)). The proposed project would increase the visibility of the home on the project site

WITTWER PARKIN / 335 SPRECKELS DR., STE. H / APTOS, CA / 95003 / 831.429.4055

and would not be compatible with surrounding residential development and would represent a significant intrusion into the public viewshed. In fact, the Staff Report provides no analysis of views from Seacliff State Beach. Nonetheless, the existing home is currently not visible from the picnic areas at Seacliff Beach (see Exhibit A), and has a low profile even from the beach itself (see Exhibit B). It is clear that the Staff Report's conclusions regarding the visual impacts and compliance with the LCP are erroneous.

B. The Project is Subject to CEQA

CEQA mandates that "the long term protection of the environment... shall be the guiding criterion in public decisions." Pub. Resources Code § 21001(d). The foremost principle under CEQA is that it is to be "interpreted in such a manner as to afford the fullest possible protection to the environment within the reasonable scope of the statutory language." (*Citizens of Goleta Valley v. Board of Supervisors* (1990) 52 Cal.3d 553, 564; *Friends of Mammoth v. Board of Supervisors* (1972) 8 Cal. 3d 247; *Mountain Lion Foundation v. Fish & Game Com.* (1997) 16 Cal.4th 105, 112.) An agency's action violates CEQA if it "thwarts the statutory goals" of "informed decisionmaking" and "informed public participation." (*Kings County Farm Bureau v. City of Hanford* (1990) 221 Cal.App.3d 692, 712.) While certain classes of projects that do not result in significant effects on the environment are categorically exempt from CEQA, "[e]xemption categories are not to be expanded beyond the reasonable scope of their statutory language." (*Id.* at 125.) As such, "a categorical exemption should be interpreted narrowly to afford the fullest possible protection to the environment within the reasonable scope of the statutory language." (*Los Angeles Dept. of Water & Power v. County of Inyo* (2021) 67 Cal.App.5th 1018, 1040.)

The burden is on the County to demonstrate that the exemption applies.

"[A categorical] exemption can be relied on only if a factual evaluation of the agency's proposed activity reveals that it applies." (*Muzzy Ranch Co. v. Solano County Airport Land Use Com.* (2007) 41 Cal.4th 372, 386....) "[T]he agency invoking the [categorical] exemption has the burden of demonstrating" that substantial evidence supports its factual finding that the project fell within the exemption. (Ibid.)

(Save Our Big Trees v. City of Santa Cruz (2015) 241 Cal.App.4th 694, 710-712.)

To achieve its objectives of environmental protection, CEQA has a three-tiered structure. (14 Cal. Code Regs. §15002(k); *Committee to Save Hollywoodland v. City of Los Angeles* (2008) 161 Cal.App.4th 1168, 1185 86; *San Lorenzo Valley Community Advocates for Responsible Education v. San Lorenzo Valley Unified School Dist.* (2006) 139 Cal. App. 4th 1356, 1372-1374 (*San Lorenzo Valley*).) First, if a project falls into an exempt category, no further agency evaluation is required. (*Id.*) Second, if there is a possibility a project will have a significant

effect on the environment, the agency must perform a threshold initial study. (*Id.*; 14 Cal. Code Regs. § 15063(a).) If the initial study indicates that there is no substantial evidence that a project may cause a significant effect on the environment, then the agency may issue a negative declaration. (*Id.*; 14 Cal. Code Regs. §§ 15063(b)(2), 15070.) However, if a project may have a significant effect on the environment, an environmental impact report is required. (14 Cal. Code Regs. § 15063(b); *San Lorenzo Valley, supra*, 139 Cal. App. 4th at 1373-1374.) Thus, the analysis begins with whether the claimed exemptions apply.

Categorical exemptions are found in the CEQA Guidelines and include certain classes of projects which are exempt from CEQA based on the California Resources Agency's determination that such projects do not have a significant impact on the environment. (Pub. Resources Code § 21084; 14 Cal. Code Regs. §§ 15300 - 15354.) However, "[t]he [Resources Agency's] authority to identify classes of projects exempt from environmental review is not unfettered ... '[W]here there is any reasonable possibility that a project or activity may have a significant effect on the environment, an exemption would be improper." (*Azusa Land Reclamation Co. v. Main San Gabriel Basin Watermaster Azusa* (1997) 52 Cal.App.4th 1165, 1191 (quoting *Wildlife Alive v. Chickering* (1976) 18 Cal.3d 190, 205-206).) Indeed, "a categorical exemption should be construed in light of the statutory authorization limiting such exemptions to projects with no significant environmental effect." (Remy, et al., Guide to CEQA (11th ed. 2006) p. 136.)

Here, the Notice of Exemption attached to the Staff Report claims that the project is exempt under the Class 1 exemption for existing facilities (14 Cal. Code Regs. Section 15301) and Class 3 exemption for new construction or conversion of small structures (14 Cal. Code Regs. section 15303). CEOA provides for several exceptions to categorical exemptions and, if an exception applies, the exemption cannot be used, and the agency must instead prepare an initial study and perform environmental review. (McOueen v. Bd. of Dirs. (1988) 202 Cal.App.3d 1136, 1149; Committee to Save the Hollywoodland Specific Plan v. City of Los Angeles, supra, 161 Cal. App. 4th at 1187.) CEQA Guidelines §15300.2 implements the exceptions to the categorical exemptions. The Notice of Exemption erroneously claims that none of the conditions in 14 Cal. Code Regs. Section 15300.2 apply. However, pursuant to section 15300.2(a), the Class 3 exemption does not apply "where the project may impact on an environmental resource of hazardous or critical concern where designated, precisely mapped, and officially adopted pursuant to law by federal, state, or local agencies." Coastal bluffs are precisely the type of resource so designated. The Staff Report even admits "that the project site is considered a 'sensitive site' as defined un SCCC 13.11.030 (Definitions) as it is located in a mapped scenic area and located on a coastal bluff." (Staff Report, p. 2.)

It is also noteworthy that the project is not within the scope of the claimed Class 1 exemption. "Class 1 consists of the operation, repair, maintenance, permitting, leasing, licensing, or minor alteration of existing public or private structures, facilities, mechanical equipment, or topographical features, involving negligible or no expansion of existing or former

use." (14 Cal. Code Regs. § 15301.) The project results in an expansion of the existing use and the addition of a second story. Therefore, aside from the fact that an exception to an exemption applies, the proposed project is not within the scope of the Class 1 exemption because the exemption must be interpreted narrowly.

Importantly, this project is located above Seacliff Beach State Park. The project will be highly visible from the State Park and should remain a single-story structure to avoid impacts to views the public experiences from Seacliff Beach.

For the foregoing reasons, the project is not exempt from environmental review. The failure of the County to address environmental concerns is a violation of CEQA and thwarts the very purpose of the statute.

The EIR is also intended "to demonstrate to an apprehensive citizenry that the agency has, in fact, analyzed and considered the ecological implications of its action." [Citation]. Because the EIR must be certified or rejected by public officials, it is a document of accountability. If CEQA is scrupulously followed, the public will know the basis on which its responsible officials either approve or reject environmentally significant action, and the public, being duly informed, can respond accordingly to action with which it disagrees. [Citation]. *The EIR process protects not only the environment but also informed self-government*.

Laurel Heights Improvement Assn. v. Regents of the University of California (1988) 47 Cal.3d 376, 392, emphasis added; see also Citizens of Goleta Valley v. Board of Supervisors, supra, 52 Cal.3d at 554; 14 Cal. Code Regs. § 15003.

C. Notice Was Not Properly Posted

In accordance with County Code section 18.10.223(A)(2), notice of the public hearing for this project shall be "Posted on the property in a *conspicuous place* at least 10 calendar days prior to the hearing." (Emphasis added.) The notice for this project was not posted in a "conspicuous place." The home shares what appears to be a driveway with two other homes and the project site has a home between it and the home directly on Seacliff Drive. However, the notice was not posted at the driveway entrance, but was instead posted on the specific project site. The driveway leading to the home appears to be a private driveway, and members of the public would not know or would feel discouraged from going down the driveway. Moreover, members of the public do not travel on the driveway. In fact, the sign related to the notice of development itself faced directly across the driveway in a manner that anyone on Seacliff Drive would not be able to read the sign (see Exhibit C). The notice of this public hearing was posted on the driveway door, which was completely obscured from Seacliff Drive and required someone to actually enter the applicant's property to read the text the notice. (See Exhibit D.) Therefore,

members of the public are not aware of this hearing because the posting is not visible from a public area, and the notice could not be read without trespassing. This not only violates the literal requirements of section 18.10.223(A)(2), but it violates the spirit of this notice provision which is to ensure that members of the public are aware of these proceedings. Therefore, the project should be denied and if the project is reconsidered, the notice must be properly posted so that members of the public are aware of these proceedings. It is noteworthy that the driveway entrance is adjacent to an area of Seacliff Drive where members of the public park their cars and congregate to view the ocean.

Finally, Pursuant to Public Resources Code § 21167(f), I am requesting that the County forward a Notice of Exemption to this office if the Project is approved. That section provides:

If a person has made a written request to the public agency for a copy of the notice specified in Section 21108 or 21152 prior to the date on which the agency approves or determines to carry out the project, then not later than five days from the date of the agency's action, the public agency shall deposit a written copy of the notice addressed to that person in the United States mail, first class postage prepaid.

For the foregoing reasons, we request that you deny approval of the Project. Thank you for your consideration.

Very truly yours, WITTWER PARKIN

William P. Parkin

cc: Client

Encls

EXHIBIT A



EXHIBIT B



EXHIBIT C



EXHIBIT D



