



COUNTY OF SANTA CRUZ

PLANNING DEPARTMENT

701 OCEAN STREET - 4TH FLOOR, SANTA CRUZ, CA 95060
(831)454-2580 FAX (831)454-2131 TDD: (831)454-2123

TOM BURNS, PLANNING DIRECTOR

August 1, 2007

Planning Commission
County of Santa Cruz
701 Ocean Street
Santa Cruz, CA 95060

Agenda Date: October 10, 2007
APN: 057-011-72
Application: 07-0251
Item #: 10

Subject: A public hearing to consider a proposal to rezone a single lot of record from the Special Use (SU) zone district to the Timber Production (TP) zone district.

Members of the Commission:

On May 14, 2007, the County Planning Department accepted this application for a rezoning to Timber Production (TP). This is a proposal to rezone a 42-acre parcel from the Special Use (SU) zone district to the Timber Production (TP) designation. The uses on the property consist of vacant rural acreage.

Background

This project qualifies for a rezoning under California Government Code Section 51113. This section allows a property owner to petition the County to rezone land to the TP zone. The requirements for this type of rezoning are listed in Government Code section 51113(c)¹. The County may not place any additional requirements on this petition to rezone the property to TP. County Code Section 13.10.375(c) – “Zoning to the TP District” implements Government Code section 51113 and specifies the **six** criteria which must be met in order to rezone to TP.

¹ c) On or before March 1, 1977, the board or council by ordinance shall adopt a list of **criteria required to be met** by parcels being considered for zoning as timberland production under this section. The criteria shall not impose any requirements in addition to those **listed in this subdivision and in subdivision (d)**. The following shall be included in **the criteria**:

- (1) **A map** shall be prepared showing the legal description or the assessor's parcel number of the **property** desired to be **zoned**.
 - (2) **A plan** for forest management shall be prepared or approved **as to content, for** the property by a **registered** professional forester. The plan shall provide for the eventual harvest of timber within a reasonable **period of time, as determined by the preparer** of the plan.
 - (3) **(A)** The parcel shall currently meet the timber stocking standards as **set forth in Section 4561 of the Public Resources Code** and the forest practice rules adopted by the State Board of Forestry and Fire Protection for the district in which the parcel is **located, or** the owner shall sign an agreement with the board or council to meet **those** stocking standards and forest practice rules by the **fifth anniversary of the signing** of the agreement. If the parcel is subsequently **zoned** as timberland production under subdivision (a), failure to **meet** the stocking standards and forest practice rules within this **time period** provides the board or council with a ground for rezoning **of the parcel pursuant to Section 51121**.
 - (B) Upon the **fifth anniversary of the signing of an agreement**, the board shall determine whether the **parcel meets** the timber stocking standards in effect on the date **that the agreement was signed**.
- Notwithstanding the provisions of Article 4 (commencing with Section 51130), if the **parcel fails to meet** the timber **stocking standards**, the board or council shall immediately **rezone** the parcel and **specify a new use** for the parcel, which is in conformance with the county general plan and whose primary use is other than timberland.
- (4) The parcel shall be timberland, **as defined in subdivision (f) of Section 51104**.
 - (5) The parcel shall be in compliance with the compatible **use ordinance adopted by the board or council pursuant to Section 51111**.
 - (d) The criteria required by subdivision (c) may also include any **or all of the following**:
 - (1) The land area concerned shall be in the ownership of one person, as defined in Section 38106 of the Revenue and Taxation Code, and shall be comprised of single or contiguous parcels of a **certain number of acres, not to exceed 80 acres**.
 - (2) The land shall be a certain site quality class or higher under Section 434 of the Revenue and Taxation Code, except that the parcel shall not be required to be of the **two highest site quality classes**.

In accordance with County Code Section 13.10.375(c), the project meets the following six criteria for rezoning to Timber Production:

1. A map has been submitted with the legal description or assessor's parcel number of the property to be rezoned.
2. A Timber Management Plan, undated, prepared by a registered professional forester has been submitted for the property (Exhibit E).
3. The parcel currently meets the timber stocking standards as set forth in Section 4561 of the Public Resources Code and the Forest Practice Rules for the district in which the parcel is located (see Exhibit E).
4. The parcel is timberland, as the entire parcel is capable of producing a minimum of 15 cubic feet of timber per acre annually and is almost entirely located within a mapped Timber Resource area.
5. The uses on the parcel are in compliance with the Timber Production Zone uses set forth in Section 13.10.372.
6. The land area to be rezoned is in the ownership of one person, as defined in Section 38106 of the Revenue and Taxation Code, and is comprised of at least five acres in area.

This project qualifies for a statutory exemption (Exhibit D) in accordance with the California Environmental Quality Act and the County Environmental Review Guidelines (Article 17, Section 1703).

Conclusion

All of the criteria have been met for rezoning this parcel to the Timber Production zoning designation. All required findings can be made to approve this application and the rezoning is consistent with the General Plan policies and land use designations.

Recommendation


Staff recommends that your Commission adopt the attached Resolution (Exhibit A), sending a recommendation to the Board of Supervisors for approval of Application No. 07-0251 based on the attached findings (Exhibit B).

EXHIBITS

- A. Planning Commission Resolution, with Ordinance/ Findings
- B. APN Map
- C. Location, Current Zoning and General Plan Designation **Maps**
- D. Notice of Exemption from CEQA
- E. Timber Management Plan by Cassidy Bill Vaughn, RPF# **2685**, dated May 22, 2007

Maria Porcila Perez
Project Planner
Development Review

Reviewed By:


Mark Deming
Assistant Planning Director

BEFORE THE PLANNING COMMISSION
OF THE COUNTY OF SANTA CRUZ, STATE OF CALIFORNIA

RESOLUTION NO. _____

On the motion of Commissioner
duly seconded by Commissioner
the following Resolution is adopted:

PLANNING COMMISSION RESOLUTION
SENDING RECOMMENDATION TO THE BOARD OF SUPERVISORS
ON PROPOSED AMENDMENT TO THE ZONING ORDINANCE

WHEREAS, the Planning Commission has held a public hearing on Application No. 07-0251, involving property located on the north side of an unnamed private right-of-way about 2.25 miles from the intersection with Old Womans Creek Road in the north coast area, and the Planning Commission has considered the proposed rezoning, all testimony and evidence received at the public hearing, and the attached staff report.

NOW, THEREFORE, BE IT RESOLVED, that the Planning Commission recommends that the Board of Supervisors adopt the attached ordinance amending the Zoning Ordinance by changing property from the Special Use (SU) zone district to the Timber Production zone district.

BE IT FURTHER RESOLVED, that the Planning Commission *makes* findings on the proposed rezoning as contained in the Report to the Planning Commission.

PASSED AND ADOPTED by the Planning Commission of the County of Santa Cruz, State of California, this _____ day of _____, 2007, by the following vote:

AYES: COMMISSIONERS
NOES: COMMISSIONERS
ABSENT: COMMISSIONERS
ABSTAIN: COMMISSIONERS

Chairperson

ATTEST: _____
MARK DEMING, Secretary

APPROVED AS TO FORM:



COUNTY COUNSEL

EXHIBIT A 1

ORDINANCE NO. _____

**ORDINANCE AMENDING CHAPTER 13
OF THE SANTA CRUZ COUNTY CODE
CHANGING FROM ONE ZONE DISTRICT TO ANOTHER**

The Board of Supervisors of the County of Santa Cruz ordains as follows:

SECTION I

The Board of Supervisors finds that the public convenience, necessity **and** general welfare require the amendment of the County Zoning Regulations to implement the policies of the County General Plan and Local Coastal Program Land Use Plan regarding the timber resource property located on the north side of an unnamed private right-of-way about 2.25 miles from the intersection with Old Womans Creek Road in the north coast area, finds that the zoning to be established herein is consistent with all elements of the Santa Cruz County General Plan and **the** Santa Cruz County Code, as modified by the *Big Creek* decision; and finds and certifies that the project is subject to a statutory exemption under the California Environmental Quality Act.

SECTION II

The Board of Supervisors hereby adopts the Zoning Plan Amendment **as** described in Section III, and adopts the findings in support thereof without modification as set forth below:

1. The proposed zone district will allow a density of development and types **of** uses which are consistent with the objectives and land use designations of **the** adopted General Plan; and
1. The proposed zone district is appropriate for the level **of** utilities and community services available to the land; and
2. The character of development in the area where the land is located has changed or is changing to such a degree that the public interest will be **better** served by a different zone district; and
3. The property meets the requirements of Government Code section 51113 or 51113.5 and County Code Section 13.10.375(c).

EXHIBIT A

SECTION III

Chapter 13.10 - Zoning Regulations of the Santa Cruz County Code is hereby amended by amending Section 13.10.210- Zoning Plan to change the following properties from the existing zone district to the new zone district as follows:

<u>Assessor's Parcel Number</u>	<u>Existing Zone District</u>	<u>New Zone District</u>
057-011-72	Special Use (SU)	TP

SECTION IV

This ordinance shall take effect on the 31st day after the date of final passage.

PASSED AND ADOPTED THIS _____ day of _____ 2007, by the Board of Supervisors of the County of Santa Cruz by the following vote:

AYES: SUPERVISORS
 NOES: SUPERVISORS
 ABSENT: SUPERVISORS
 ABSTAIN: SUPERVISORS

 Chairman of the Board of Supervisors

ATTEST: _____
 Clerk of the Board

APPROVED AS TO FORM:

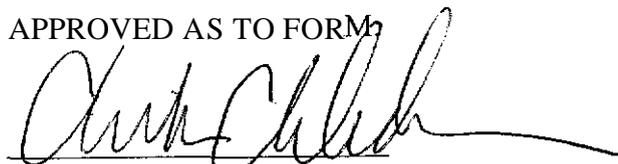

 Assistant County Counsel

Exhibit: Rezoning Map

DISTRIBUTION: County Counsel
 Planning
 Assessor
 County

GIS

EXHIBIT A


FOR TAX PURPOSES ONLY
 THIS ASSASSOR MAPS ARE QUALIFIED AS TO MAP ACCURACY FOR ASSURES AND
 LIABILITY FOR OTHER USES. NOT TO BE REPRODUCED. ALL RIGHTS RESERVED.
 © COPYRIGHT SANTA CRUZ COUNTY ASSESSOR 2000

(26)


FOR SECS. 3,4,5 & 9
 T.9S., R.4W., M.D.B. & M.

Tax Area Code
 86-022 86-023

57-01



**SUBJECT
 PROPERTY**

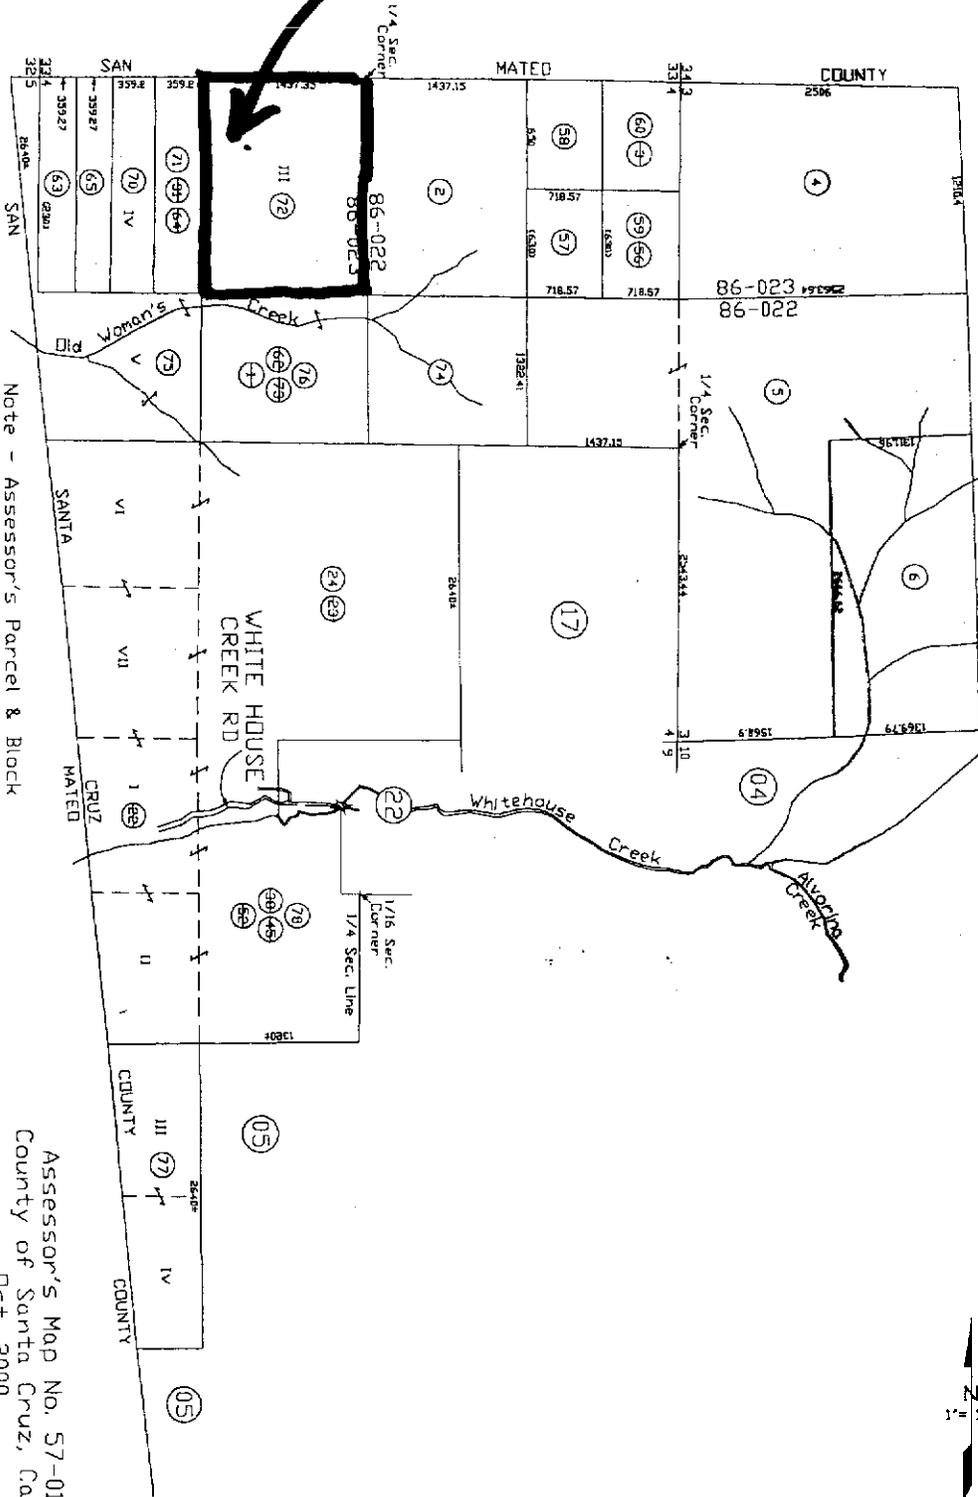


Note - Assessor's Parcel & Block
 Numbers are Shown in Circles.

Assessor's Map No. 57-01
 County of Santa Cruz, Calif.
 Oct. 2000





Location Map

San Mateo County

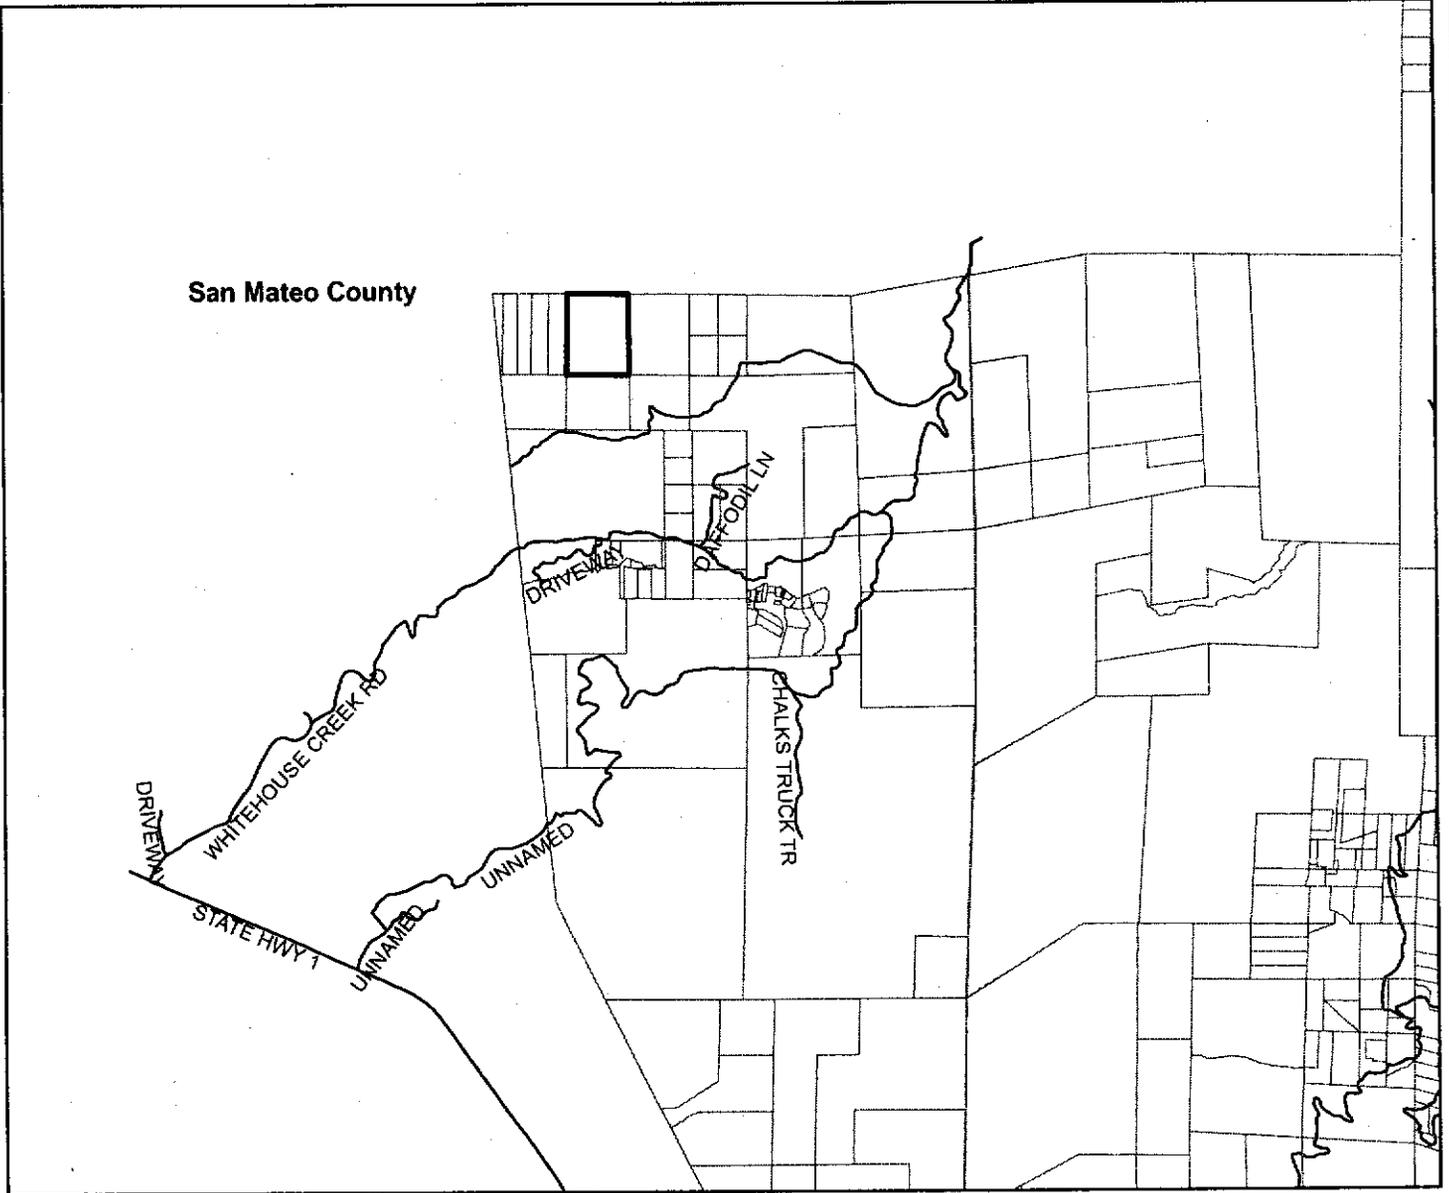

Legend

-  APN 057-011-72
-  Assessors Parcels
-  Streets





Map Created by
County of Santa Cruz
Planning Department
June 2007

EXHIBIT C




Zoning Map

San Mateo County

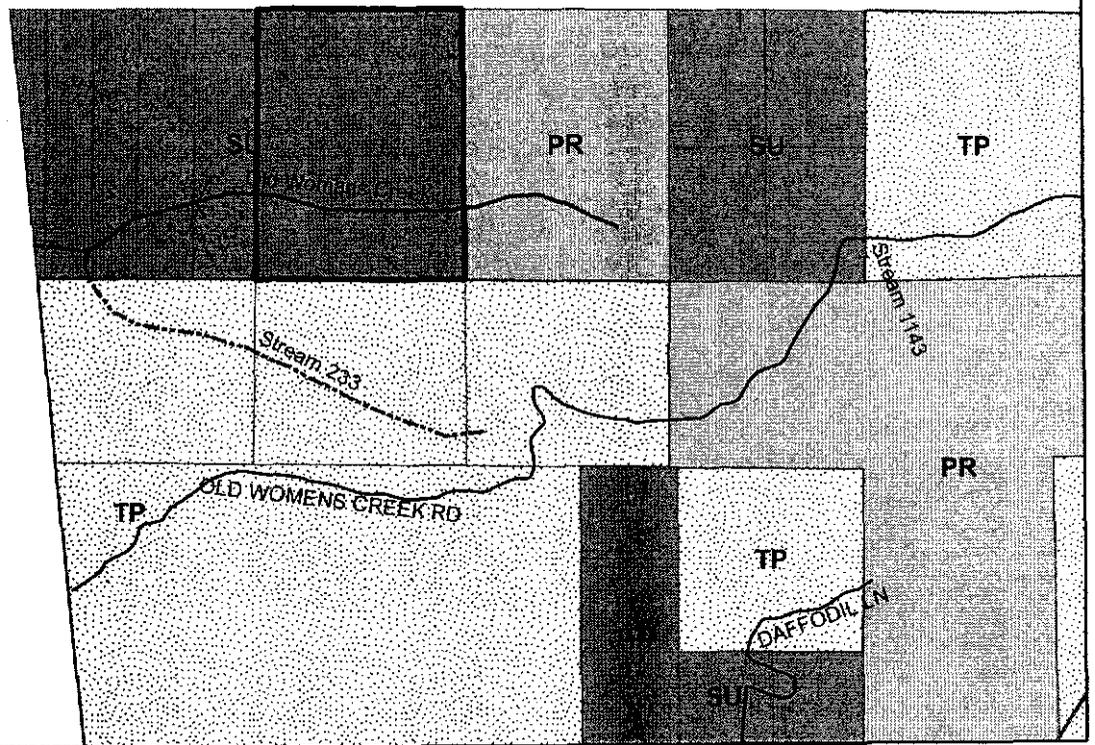

Legend

- APN 057-011-72
- Assessors Parcels
- Streets
- Perennial Stream
- Intermittent Stream
- SPECIAL USE (SU)
- PARK (PR)
- TIMBER PRODUCTION (TP)





Map Created by
 County of Santa Cruz
 Planning Department
 June 2007

EXHIBIT C




General Plan Designation Map

San Mateo County

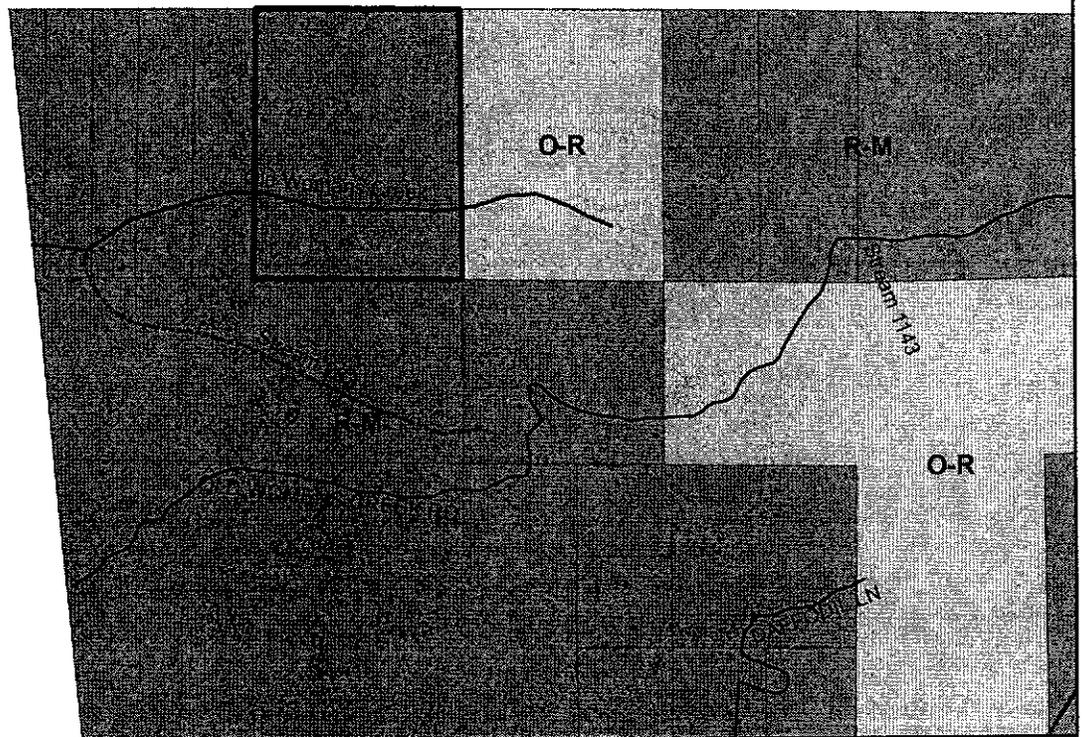

Legend

-  APN 057-011-72
-  Assessors Parcels
-  Streets
-  Perennial Strea
-  Intermittent Stream
-  Residential-Mountain (R-M)
-  Parks and Recreation(O-R)



Map Created by
 County of Santa Cruz
 Planning Department
 June 2007

EXHIBIT C

CALIFORNIA ENVIRONMENTAL QUALITY ACT NOTICE OF EXEMPTION

The Santa Cruz County Planning Department has reviewed the project described below and has determined that it is exempt from the provisions of CEQA as specified in Sections 15061 - 15332 of CEQA for the reason(s) which have been specified in this document.

Application Number: 07-0251

Assessor Parcel Number: 057-011-72

Project Location: Property located on the north side of an unnamed private right-of-way about 2.25 miles from the intersection with Old Womans Creek Road in the north coast area.


Project Description: Rezone a single parcel from the Special Use (SU) zone district to the Timber Production (TP) zone district.

Person or Agency Proposing Project: Chris E. Christensen

Contact Phone Number: (650) 794-0443

- A. The proposed activity is not a project under CEQA Guidelines Section 15378.
- B. The proposed activity is not subject to CEQA as specified under CEQA Guidelines Section 15060 (c).
- C. **Ministerial Project** involving only the use of fixed standards or objective measurements without personal judgment.
- D. **Statutory Exemption** other than a Ministerial Project (CEQA Guidelines Section 15260 to 15285). [Section 1703]

In addition, none of the conditions described in Section 15300.2 apply to this project.



Maria Porcila Perez, Project Planner

Date: 8/13/07

**FOREST MANAGEMENT PLAN FOR
LANDS OF CHRISTENSEN
APN# 057-011-72**

**PREPARED FOR:
SANTA CRUZ COUNTY PLANNING
MAY 22,2007**

**PREPARED BY:
CASSADY BILL VAUGHAN
REGISTERED PROFESSIONAL FORESTER #2685**

Stephen R. Staub
Forester & Environmental Consultant



County of Santa Cruz Planning Department
Attn: Robin Bolster-Grant
701 Ocean Street, 4th Floor
Santa Cruz, CA 95060

May 22, 2007

Re: TPZ Rezoning of Assessor's Parcel #s 057-011-72

Robin,

This letter is requests rezoning of Santa Cruz County Assessor's Parcel # 057-011-72 (42.22 acres) from its current Special Use (SU) designation to the Timber Production Zone (TPZ). The parcel is owned solely by Chris Christensen, and meets the following criteria:

- 1) The parcel meets the TPZ timber stocking standards as set forth in Section 4561 of the Public Resources Code and the Forest Practice Rules adopted by the State Board of Forestry for the Southern Subdistrict of the Coast Forest District (See attached Stocking Analysis).
- 2) The parcel meets the definition of "Timberland" per Section 51104 (f) of the Government Code (See attached Wood Fiber Analysis).
- 3) The parcel meets the permitted use requirements per County Code Section 23.20.372 (See attached Compatible Use Analysis).
- 4) The second-growth timber on the parcel has been selectively harvest at least once since the original clear-cutting era. The parcel was harvested most recently under THP # 5-83-38 SC (See attached THP Pages).
- 5) At 42 acres, the parcel meets the current minimum 5-acre size requirement for TP zoning and complies with the most recent decision by the Board of Supervisors (5/22/07 Meeting) to increase the acreage minimum to 40.

Also attached:

- 1) Assessor's Parcel Map.
- 2) Timber Harvest Plan # 5-83-38 SC Work Completion Report and Map
- 3) A check payable to the County of Santa Cruz in the amount of \$1,691.

Sincerely,

Cassady Bill Vaughan, RPF #2685

STOCKING ANALYSIS

Background: Government Code Section 51113(c)(3)(A) requires that a parcel meet the timber stocking standards set forth in Section 4561 of the Public Resources Code and Section 913.8(a)(1) of the California Code of Regulations (CCR). The timber stocking standards pertaining to CCR Section 913.8(a) are met if the timberland contains an average, minimum post-harvest basal area of at least 75 square feet/acre for Site III land. The requirements of PRC 4561 are less stringent.

Analysis: Field review of the property suggests that the average dominant redwood and Douglas-fir trees on the property exhibit Site III characteristics. Site III characteristics are defined under CCR 1060 as lands capable of growing redwood trees of 135-154 feet in 100 years, and Douglas-fir trees of 134-163 feet. The parcel was selectively harvested in 1983, and has demonstrated its value as a timber production property capable of sustaining periodic harvests while maintaining the minimum basal area requirements cited above.

WOOD FIBER ANALYSIS

Background: Government Code Section 51113(c)(4) requires that parcels zoned timber production must meet the definition of "Timberland" which is defined in Government Code Section 51104(f) as: "Privately owned land, or land acquired for state purposes, which is devoted to and used for growing and harvesting timber, or for growing and harvesting timber and compatible uses, and which is capable of growing an average annual volume of wood fiber of at least 15 cubic feet per acre".

Analysis: Field review of the property suggests that the parcels are capable of producing wood fiber in excess of 15 cubic feet/acre/year. Soil productivity analysis confirms this observation. The soil type is the Ben Lomond-Felton complex, which listed in the USDA Soil Survey (1980) as "well-suited to the production of redwood and Douglas-fir", and based on field review, is currently producing approximately 100 cubic feet of wood fiber/acre/year.

COMPATIBLE USE ANALYSIS

The primary land use on the subject parcel has been timber production which has been a compatible use along with recreation and nature study. Only the County's reinterpretation of what constitutes an "allowable use" on properties zoned Special Use has brought into question the compatibility of timber production. The subject parcel is bordered on the north and south by parcels zoned TP.

requirements and other info as designated.

THP FILE COVER SHEET

THP # 5-83-38SC

Timber Owner Westar Timber Group, #17, Ltd.

Mailing Address PO Box 66978 City Scotts Valley State CA Zip 95066

Timberland Owner Same as Above

Mailing Address City State Zip

Timber Operator Timber Harvest Mgt. Co., Inc. Permit # A 7335

Mailing Address 146 Gibson #1 PO Box 66978 City Ukiah State CA Zip 95482

Forester: Steve Merlo License # 1699

Mailing Address 619 Grove Ave. City Ukiah State CA Zip 95482

1. Regional Office: John Hastings, Chief 2221 Garden Road Monterey, CA 93940 ATTN: Ray Jackman
* 2. County: County of Santa Cruz Planning Dept. Room 420 701 Ocean St. Santa Cruz, CR 95060
* 3. File

Location Old Woman's Crk. Sec. 4 Twp. 9S Rge. 4W Approx. Acres 120 Ranger Dist. 11 Assessors Parcel #

1/PHI 9-8-83/9-12-83 Fire Plan Rcvd. 4-16-84 Work Comp. Rpt. Apprvd.
PHI Apprvd. 9-22-83 Expiration Date: 9-22-86 Stocking Report/Waiver

INSPECTION


Table with 12 columns: #, Date, Hrs., Vio., Insp. #, Date, Hrs., Vio., Insp. #, Date, Hrs., Vio. Contains inspection records for PHI on 9-8-83, 10-29-83, and 12-12-83.

AMEND.

Table with 12 columns: #, Date, Sub., Minor, Amend. #, Date, Sub., Minor, Amend. #, Date, Sub., Minor. Contains amendment record #1 dated 4-3-84.

THP 5-83-38 SA

Santa C.

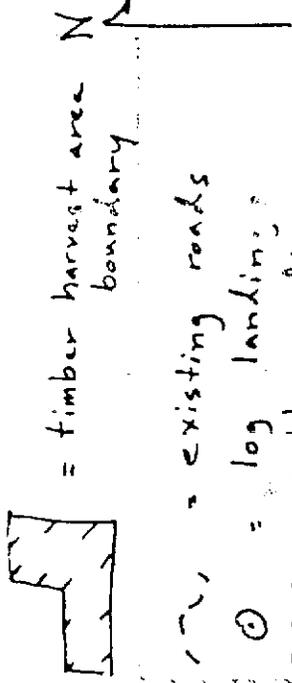

CCC = cable yarding area
 RR = railroad car bridge
 X = culvert crossing
 7.5 min. Quad scale prepared by S.J. Merlo

SUBJECT PROPERTY

